


Presentation, description

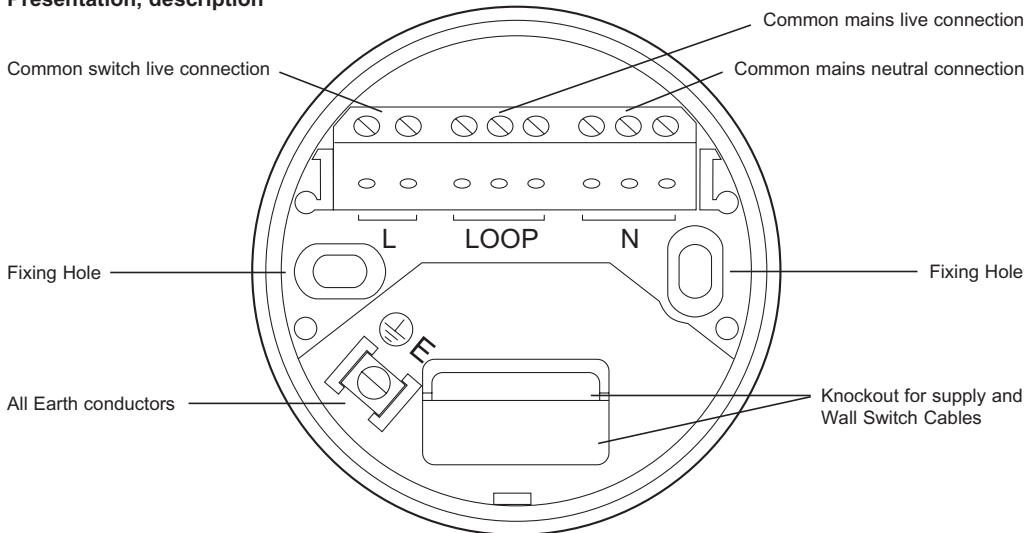

L = Common Switched live connections. Connect the brown wire from the lampholder and the live switch return from the light switch.

LOOP = Common mains live connections. Also suitable for live connections for loop in - loop out.

N = Common mains neutral connections. Connect the blue conductor from the lampholder and mains supply neutral conductors. Also suitable for loop in - loop out neutral connections.

Recommendations

Connect all earth conductors to the brass earthing block.

Note. 1/ It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and that is installed to the current edition of the IEE wiring regulations.

Note. 2/ In accordance with wiring regulations all earth conductors should be sleeved with green/yellow sleeving.

Note. 3/ In order to minimise accidental contact with the lamp and lamp holder it is recommended that the lamp holder is fitted a minimum of 2 metres above ground.

Fixing - With the ceiling rose firmly in place make the connections as above, making sure there are no exposed bare conductors. Scew the ceiling rose cover back in place.

Operation - The pendant will operate with any 13W to 18W, G24, 4 pin lamp, however it is best suited for use with branded lamps.

User - Please note that protective circuitry designed to ensure longevity of the electronics will operate to shut off if a faulty lamp or no lamp is detected. In order to reset this protective circuit the power must be switched off for a full 25 seconds with a good lamp in place.

Important:

This product is not dimmable.
Isolate mains supply before attempting installation.
Please ensure these instructions are retained for the user.

