

Catalogue numbers Dimensions

IP55

U_e = 230...400 V

Galvanised or RAL 9010 white




Canalis KBA, 25 and 40 A Busbar trunking for lighting and power socket distribution

Optional remote-control circuit (code T)


Optional white-lacquered metal enclosure (code W)

Canalis
KBA


Feed units (supplied with end cover)



KBA 25ABG4




KBA 40ABG4




KBA 40ABD4

Designation	Rating (A)	Mounting	Cable connection		Cat. no.	Weight (kg)	Option ⁽¹⁾	
			Terminals (mm ²)	Cable gland max. Ø (mm)			T	W
Feed unit	25	Left	4	PG 16, Ø 15	KBA 25ABG4	0.200	-	-
	25 or 40	Left	10	PG 21, Ø 19	KBA 40ABG4	0.400	■	■
	25 or 40	Right	10	PG 21, Ø 19	KBA 40ABD4	0.500	■	■


KBA 25ABG4 with end cover




KBA 40ABG4 with end cover



KBA 40ABD4 with end cover

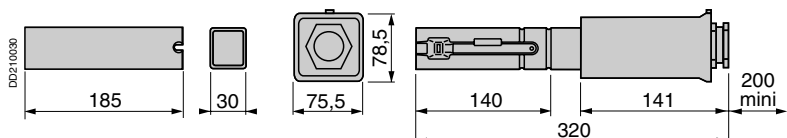


Flexible lengths

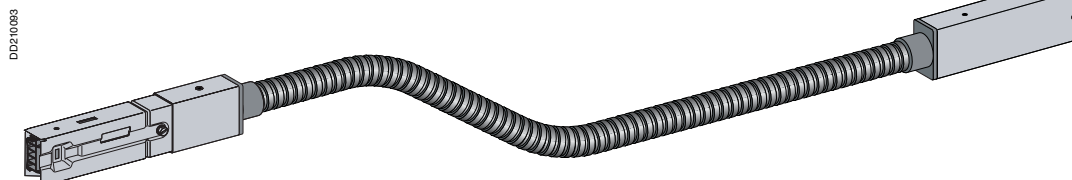


KBA 40DF400

Designation	Mounting	Length (m)	Cat. no.	Weight (kg)	Option ⁽¹⁾	
Flexible length	For elbows, changing levels, detours around obstacles, etc.	0.5	KBA 40DF405	0.050	■	■
		2	KBA 40DF420	0.105	■	■

KBA 40DF405

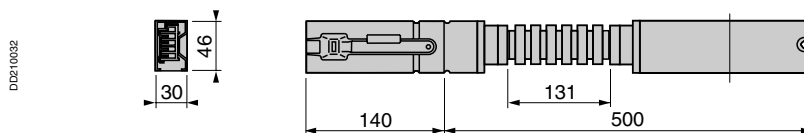

KBA 40DF420

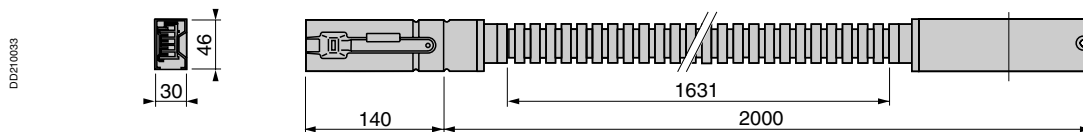

(1) ■ the two options may be combined. Add T and/or W to cat. no. Ex: KBA 40ABG4TW.