


# AF09 ... AF80 4 pole contactors

## Main accessories

### Contactor and main accessories (other accessories available)

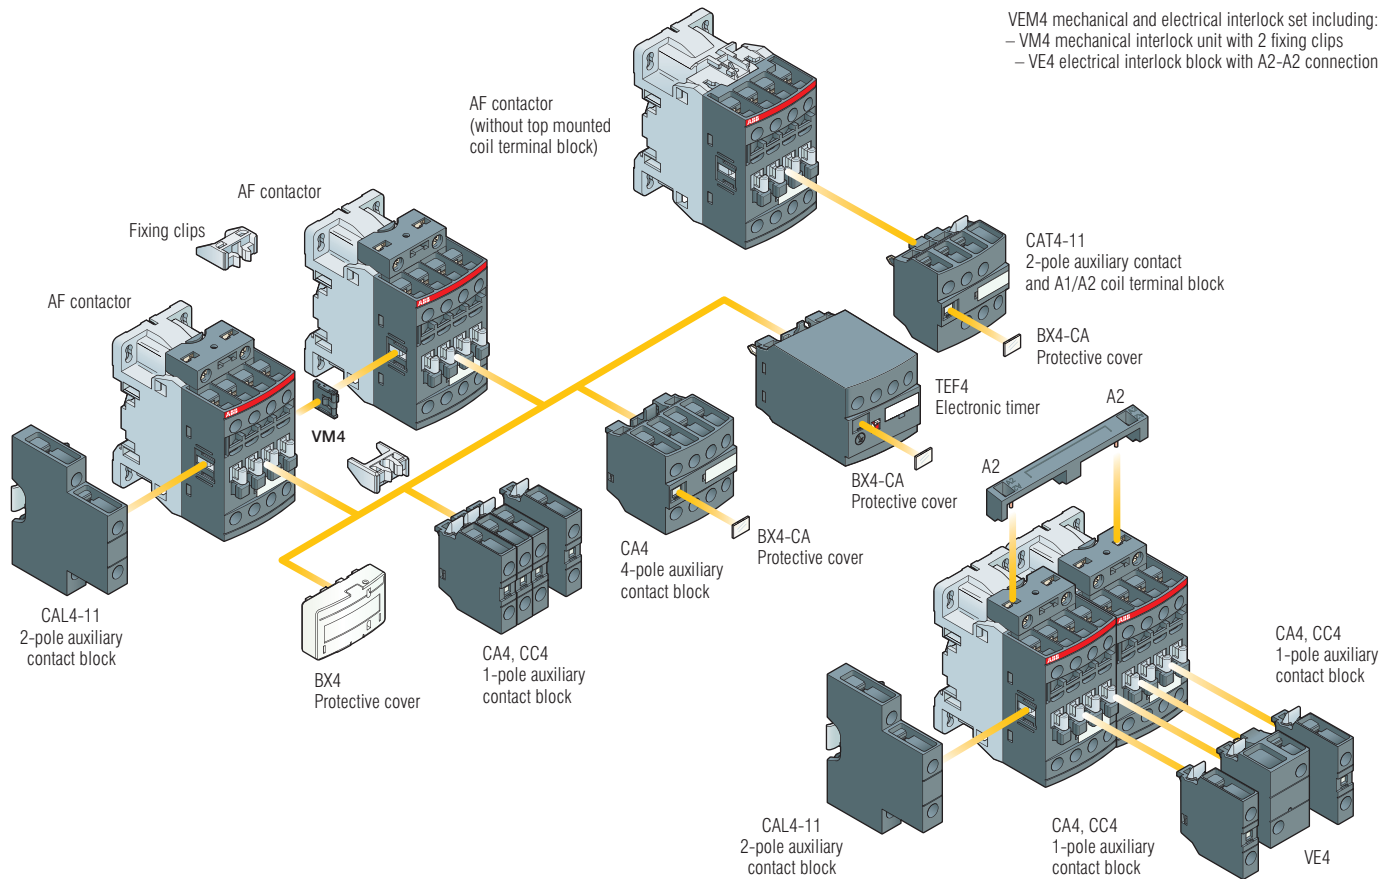

### Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

Contactor types	Main poles		Built-in auxiliary contacts		Front-mounted accessories				Side-mounted accessories		
	1	2	1	2	Auxiliary contact blocks		Electronic timer	Electrical and mechanical interlock set (between 2 contactors)	Auxiliary contact blocks		
					1-pole CA4		TEF4	VEM4	Left side	Right side	
					1-pole CC4	2-pole CAT4-11	4-pole CA4		2-pole CAL4-11		
					Max. add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5						
AF09 ... AF16	4	0	0	0	4 max.	or 1	or 1	or 1	+ 1	–	
					2 max.	or 1	–	or 1	+ 1	+ 1	
					3 max.	–	–	–	+ 1	or 1	
					Max. add-on N.C. auxiliary contacts: 3 N.C. max. on positions 1, 2, 3, 4 and 2 N.C. max. on positions 1 ±30°, 5						
AF26 ... AF38	4	0	0	0	4 max.	or 1	or 1	or 1	+ 1	–	
					2 max.	or 1	–	or 1	+ 1	+ 1	
					3 max.	–	–	–	+ 1	or 1	
					Max. add-on N.C. auxiliary contacts: 6 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5						
AF40 ... AF52	4	0	0	0	4 max.	or 1	or 1	or 1	+ 1	+ 1	
AF80	4	0	0	0	4 max.	–	or 1	or 1	+ 1	+ 1	
					Max. add-on N.C. auxiliary contacts: 3 N.C. max. on positions 1, 2, 3, 4 and 2 N.C. max. on positions 1 ±30°, 5						
AF09 ... AF16	2	2	0	0	4 max.	or 1	or 1	or 1	+ 1	–	
AF26 ... AF38	2	2	0	0	2 max.	or 1	–	or 1	+ 1	+ 1	
					Max. add-on N.C. auxiliary contacts: 2 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5						
AF40	2	2	0	0	4 max.	or 1	or 1	or 1	+ 1	–	
					4 max.	–	or 1	or 1	+ 1	+ 1	
AF80	2	2	0	0	4 max.	–	or 1	or 1	+ 1	+ 1	