

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Three Circuit Unity 3 LED Mains (A/3ULEDS3)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

A/3ULEDS3 Three Circuit Unity 3 LED Mains


Luminaire data

Luminaire efficiency : 88.4%
Luminaire efficacy : 87.54 lm/W
Classification : A80 ↓99.1% ↑0.9%
CIE Flux Codes : 98 99 100 99 88
UGR 4H 8H : 13.5 / 13.9
Power : 37 W
Luminous flux : 3239 lm

Equipped with

Quantity : 1
Designation : LED 4000k
Colour :
Luminous flux : 3664 lm

Dimensions : 115 mm x 115 mm x 80 mm

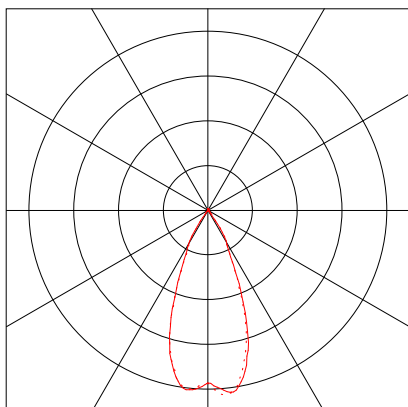


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Three Circuit Unity 3 LED Mains (A/3ULEDS3)

1.1.2 LDC

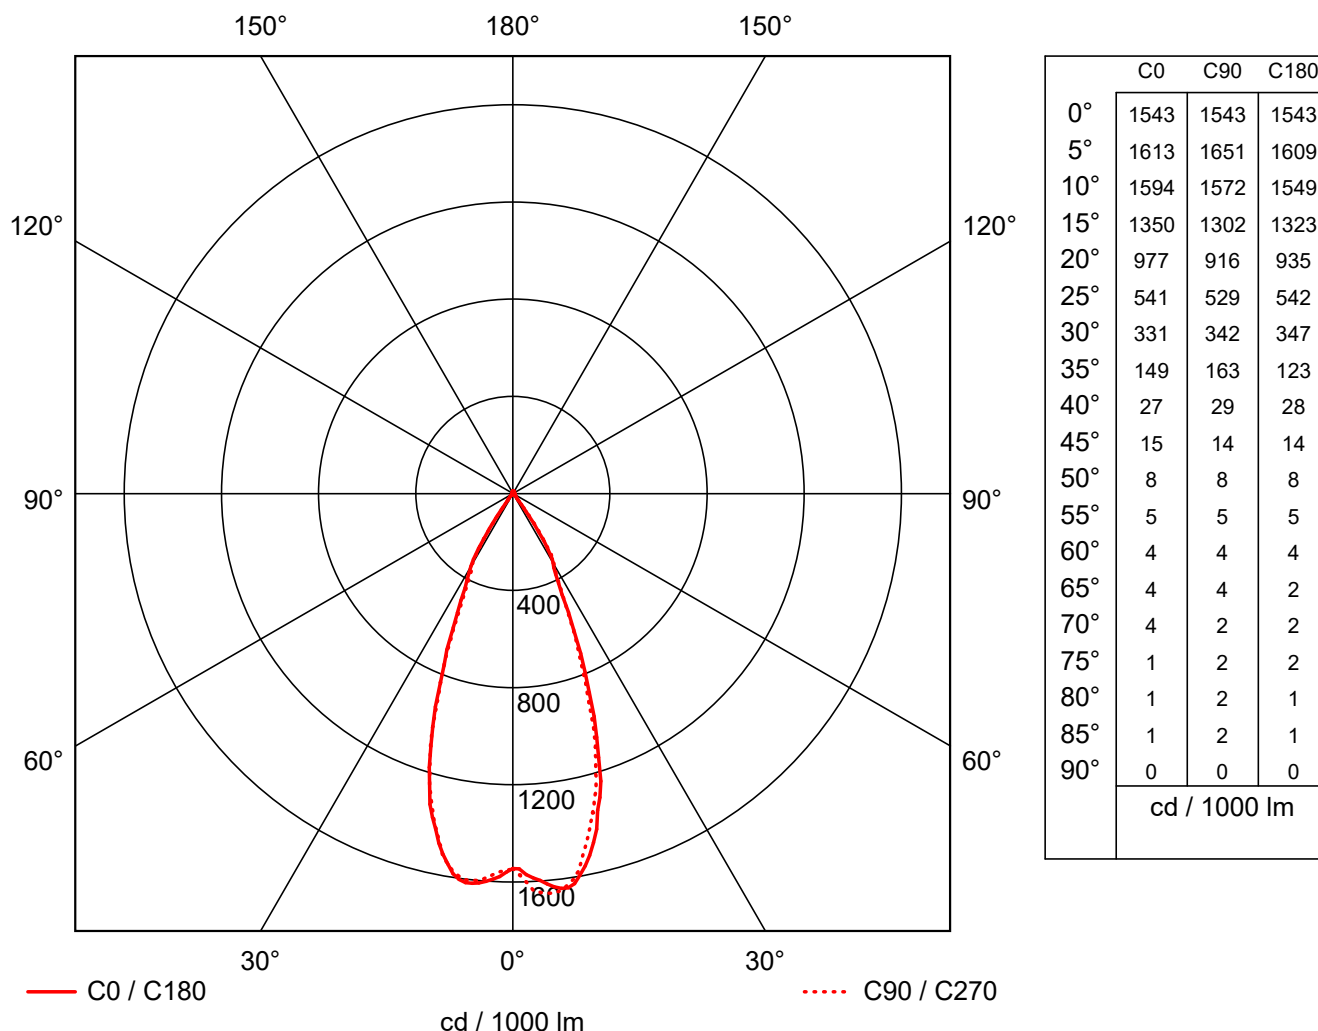

Manufacturer	: ANSELL Lighting	Efficiency factor	: 88.4%
Order number	: A/3ULEDS3	Luminaire efficacy	: 87.54 lm/W (A80)
Luminaire name	: Three Circuit Unity 3 LED Mains	Light distribution	
Equipment	: 1 x LED 4000k 37 W / 3664 lm	Beam Angle	: 21.6° C0
Dimensions	: L 115 mm x W 115 mm x H 80 mm		: 21.1° C90
File name	: rlx_20170830202429.ltd		: 21.1° C180
			: 21.1° C270