

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Three Circuit Unity 4 LED Mains (A/3ULEDS4)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

A/3ULEDS4 Three Circuit Unity 4 LED Mains


Luminaire data

Luminaire efficiency : 87.9%
Luminaire efficacy : 93.38 lm/W
Classification : A80 ↓98.9% ↑1.1%
CIE Flux Codes : 98 99 100 99 88
UGR 4H 8H : 13.1 / 13.3
Power : 42 W
Luminous flux : 3922.1 lm

Equipped with

Quantity : 1
Designation : LED 4000K
Colour :
Luminous flux : 4462 lm

Dimensions : 140 mm x 140 mm x 100 mm

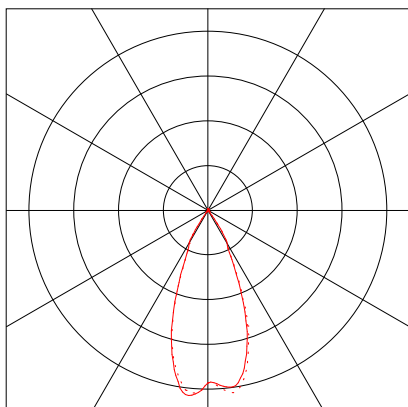


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Three Circuit Unity 4 LED Mains (A/3ULEDS4)

1.1.2 LDC

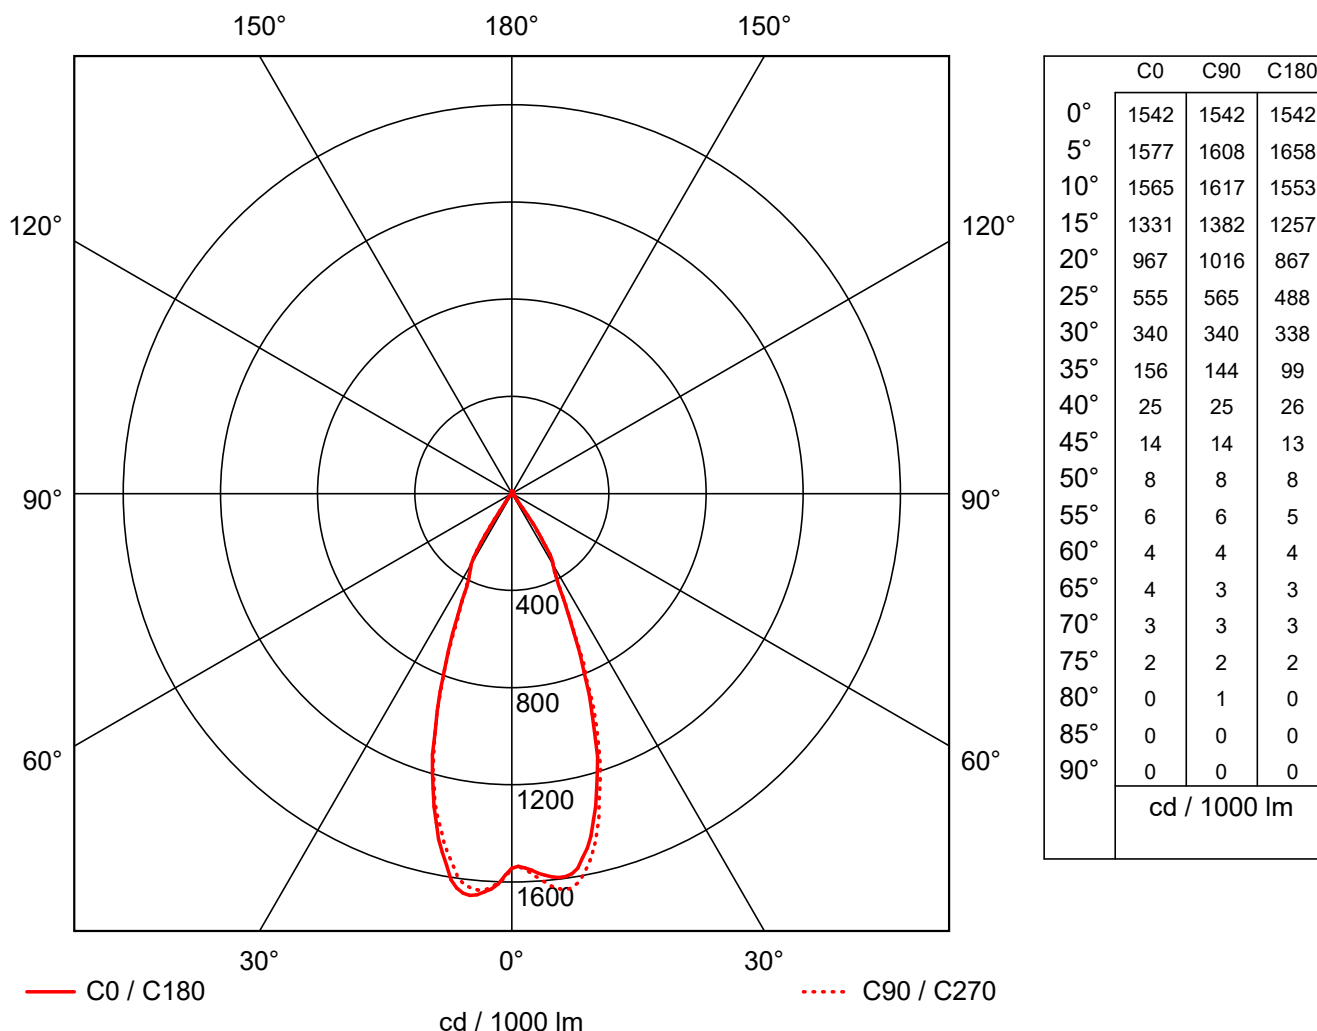

Manufacturer : ANSELL Lighting
Order number : A/3ULEDS4
Luminaire name : Three Circuit Unity 4 LED Mains
Equipment : 1 x LED 4000K 42 W / 4462 lm
Dimensions : L 140 mm x W 140 mm x H 100 mm
File name : rlx_20170830202431.ltd

Efficiency factor : 87.9%
Luminaire efficacy : 93.38 lm/W (A80)
Light distribution
Beam Angle : 21.6° C0
21.9° C90
20.4° C180
20.3° C270