

1 Luminaire data

1.1 Ansell Lighting, Apex IP69K Tubular (AAPEXLED/4)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

AAPEXLED/4 **Apex IP69K Tubular**

Luminaire data


Absolute Photometry

Luminaire efficacy : 162.23 lm/W
 Classification : B31 ↓89.8% ↑10.2%
 CIE Flux Codes : 43 72 90 90 100
 UGR 4H 8H : 29.1 / 24.3
 Power : 35 W
 Luminous flux : 5678 lm

Dimensions : 70 mm x 1200 mm x 35 mm


Equipped with

Quantity : 1
 Designation :
 Colour :

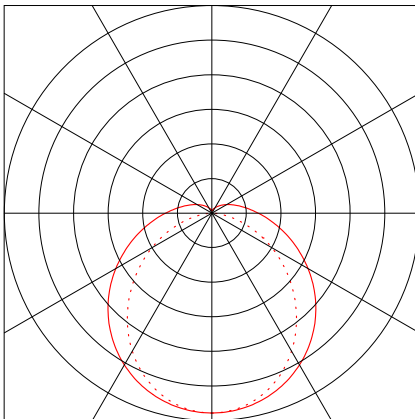

1.1 Ansell Lighting, Apex IP69K Tubular (AAPEXLED/4)

1.1.2 LDC

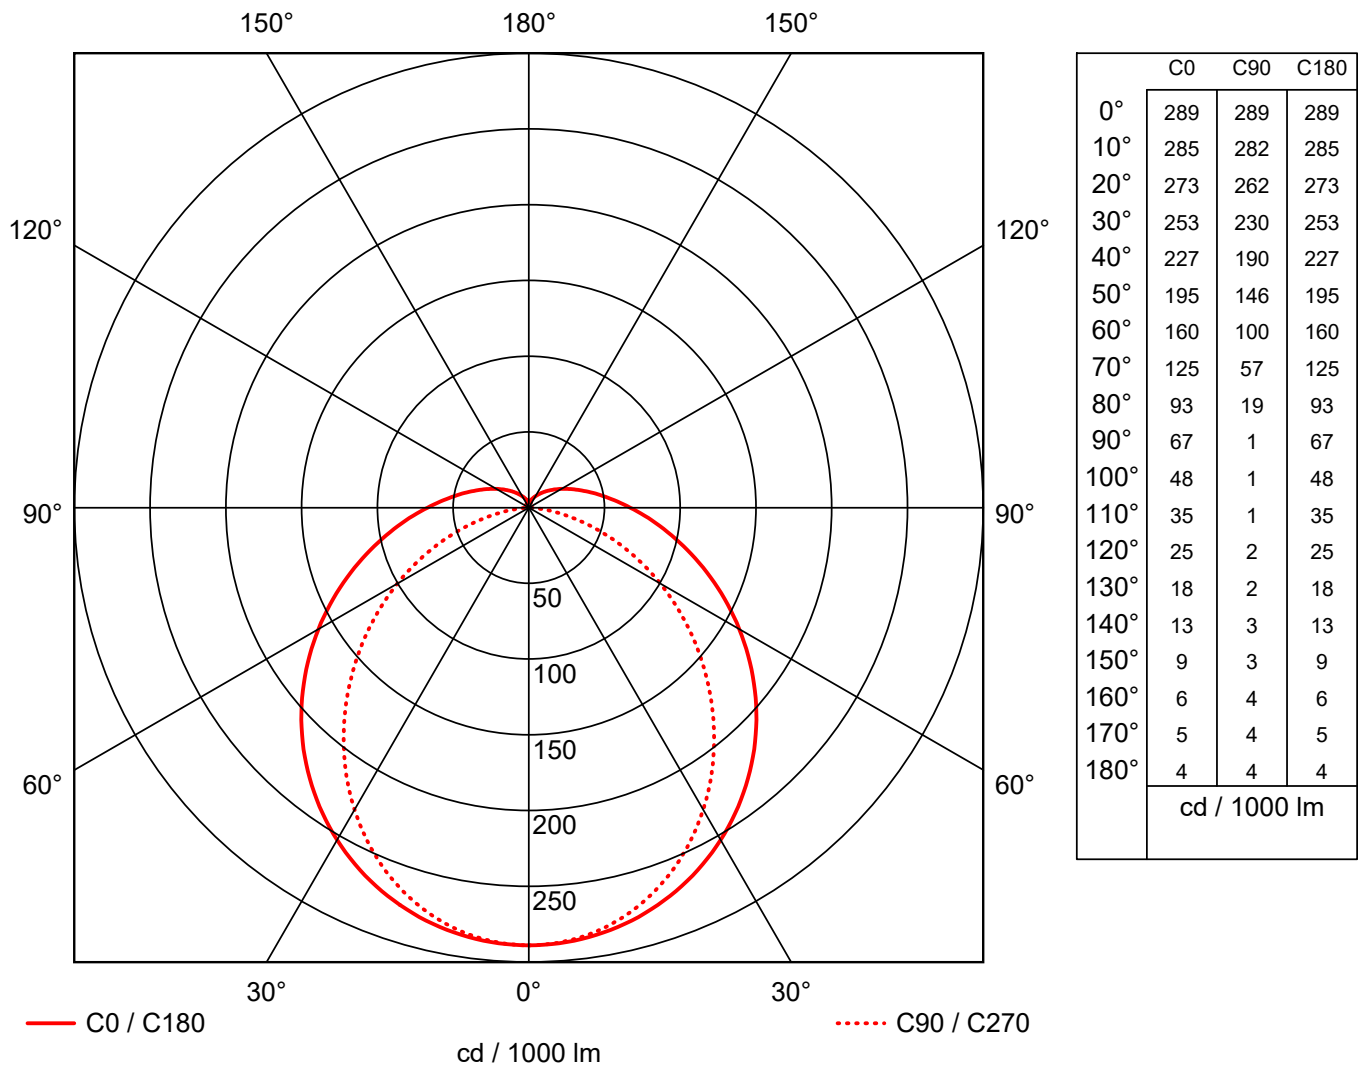

Manufacturer : Ansell Lighting
 Order number : AAPEXLED/4
 Luminaire name : Apex IP69K Tubular
 Equipment : 1 x 35 W / 5678 lm
 Dimensions : L 70 mm x W 1200 mm x H 35 mm
 File name : rlx_20210314144848.ldt

Luminaire efficacy : 162.23 lm/W (B31)
 Light distribution : sym. to C0-C180 / C90-C270
 Beam Angle : 128.9° C0-C180
 100.5° C90-C270