

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Calinor LED Polycarbonate FI... (ACALED10/WW)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ACALED10/WW

Calinor LED Polycarbonate Floodlight


Luminaire data

Luminaire efficiency : 79.8%
Luminaire efficacy : 89.22 lm/W
Classification : A60 ↓99.4% ↑0.6%
CIE Flux Codes : 73 98 100 99 80
UGR 4H 8H : 17.6 / 20.6
Power : 10 W
Luminous flux : 892.2 lm

Equipped with

Quantity : 1
Designation : 3000k
Colour :
Luminous flux : 1118 lm

Dimensions : 144 mm x 122 mm x 51 mm

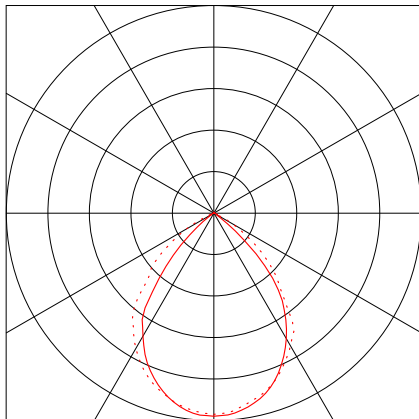


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Calinor LED Polycarbonate FI... (ACALED10/WW)

1.1.2 LDC

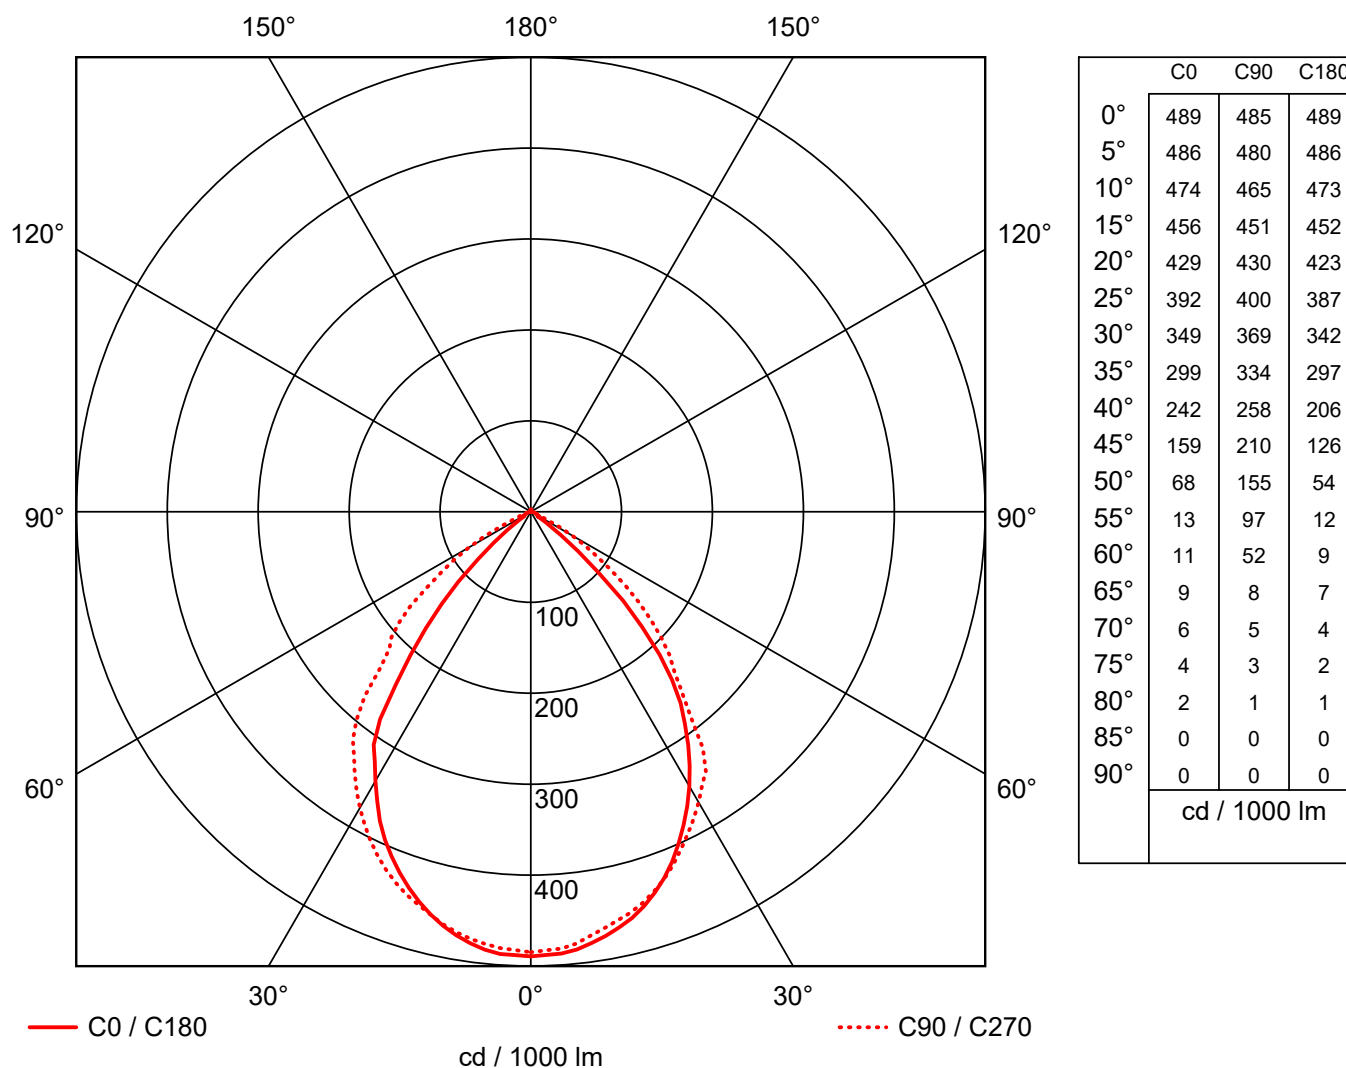

Manufacturer : ANSELL Lighting
Order number : ACALED10/WW
Luminaire name : Calinor LED Polycarbonate Floodlight
Equipment : 1 x 3000k 10 W / 1118 lm
Dimensions : L 144 mm x W 122 mm x H 51 mm
File name : rlx_20170830132039.Idt

Efficiency factor : 79.8%
Luminaire efficacy : 89.22 lm/W (A60)
Light distribution : 39.5° C0
Beam Angle : 41.1° C90
37.7° C180
43.6° C270