

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Calinor LED Polycarbonate Flood... (ACALED10)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ACALED10 Calinor LED Polycarbonate Floodlight


Luminaire data

Luminaire efficiency : 79.8%
Luminaire efficacy : 94.16 lm/W
Classification : A60 ↓99.4% ↑0.6%
CIE Flux Codes : 74 98 100 99 80
UGR 4H 8H : 16.6 / 19.4
Power : 10 W
Luminous flux : 941.6 lm

Equipped with

Quantity : 1
Designation : 4000K
Colour :
Luminous flux : 1180 lm

Dimensions : 144 mm x 122 mm x 51 mm

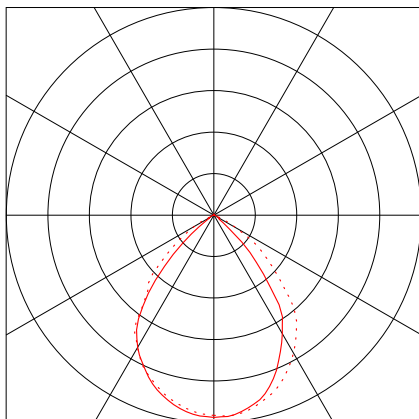


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Calinor LED Polycarbonate Flood... (ACALED10)

1.1.2 LDC

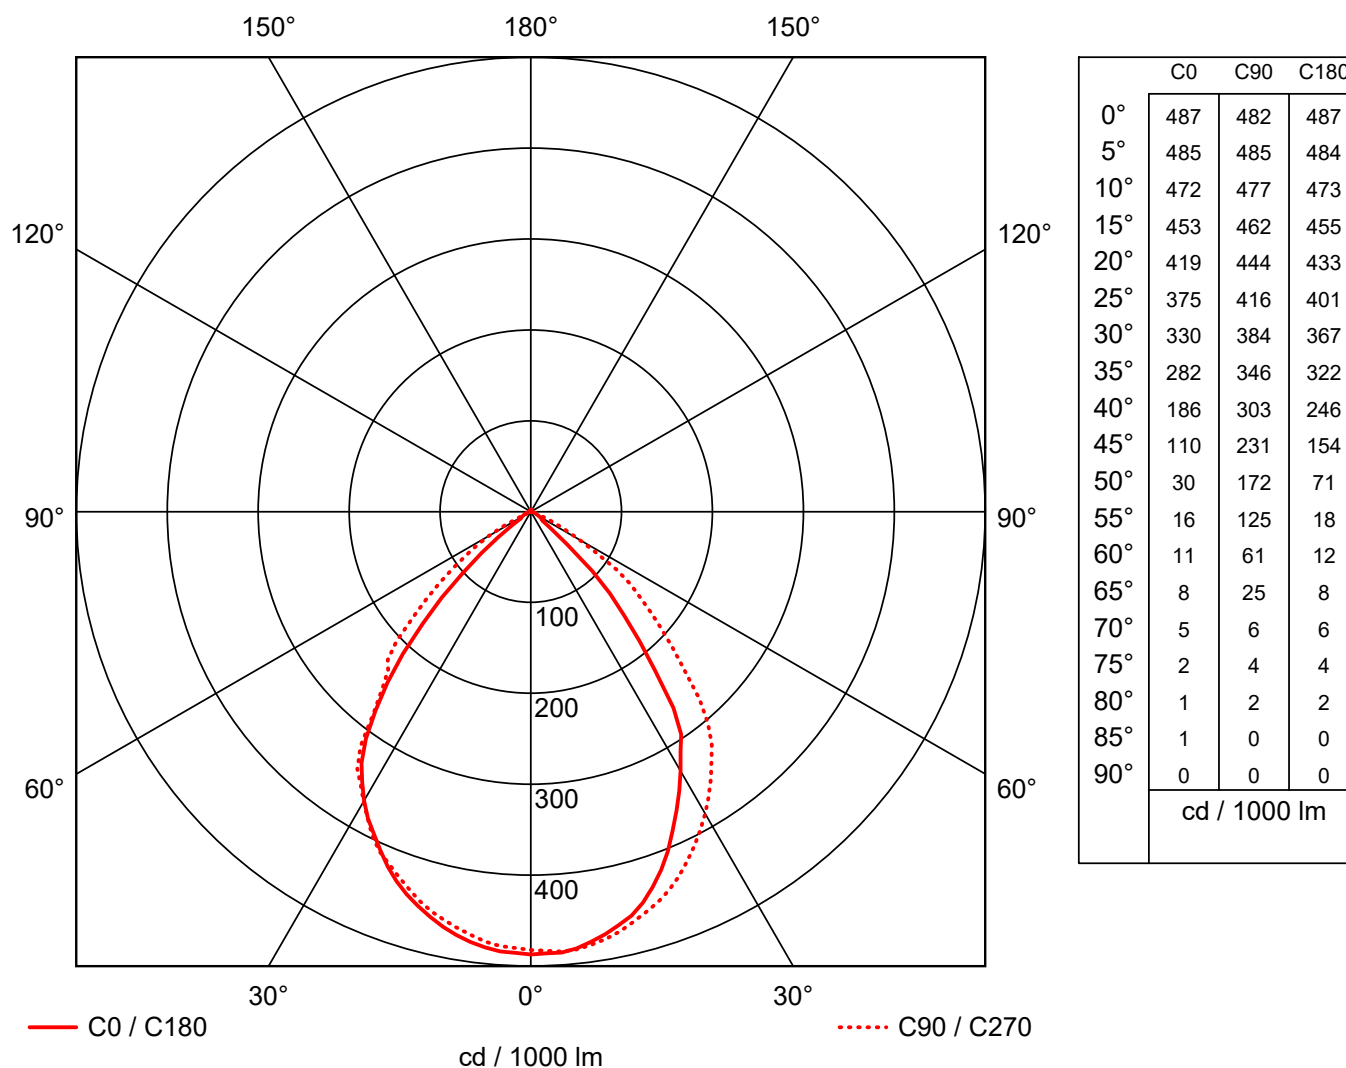

Manufacturer : ANSELL Lighting
Order number : ACALED10
Luminaire name : Calinor LED Polycarbonate Floodlight
Equipment : 1 x 4000K 10 W / 1180 lm
Dimensions : L 144 mm x W 122 mm x H 51 mm
File name : rlx_20170830132037.Idt

Efficiency factor : 79.8%
Luminaire efficacy : 94.16 lm/W (A60)
Light distribution
Beam Angle : 36.9° C0
43.9° C90
40.0° C180
41.1° C270