

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Calinor LED Polycarbonate Flood... (ACALED20)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ACALED20 Calinor LED Polycarbonate Floodlight


Luminaire data

Luminaire efficiency : 81.8%
Luminaire efficacy : 96.16 lm/W
Classification : A60 ↓99.5% ↑0.5%
CIE Flux Codes : 71 97 100 99 82
UGR 4H 8H : 17.7 / 21.7
Power : 20 W
Luminous flux : 1923.1 lm

Equipped with

Quantity : 1
Designation : 4000K
Colour :
Luminous flux : 2351 lm

Dimensions : 166 mm x 165 mm x 60 mm

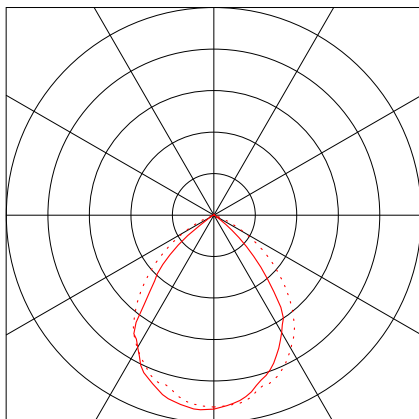


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Calinor LED Polycarbonate Flood... (ACALED20)

1.1.2 LDC

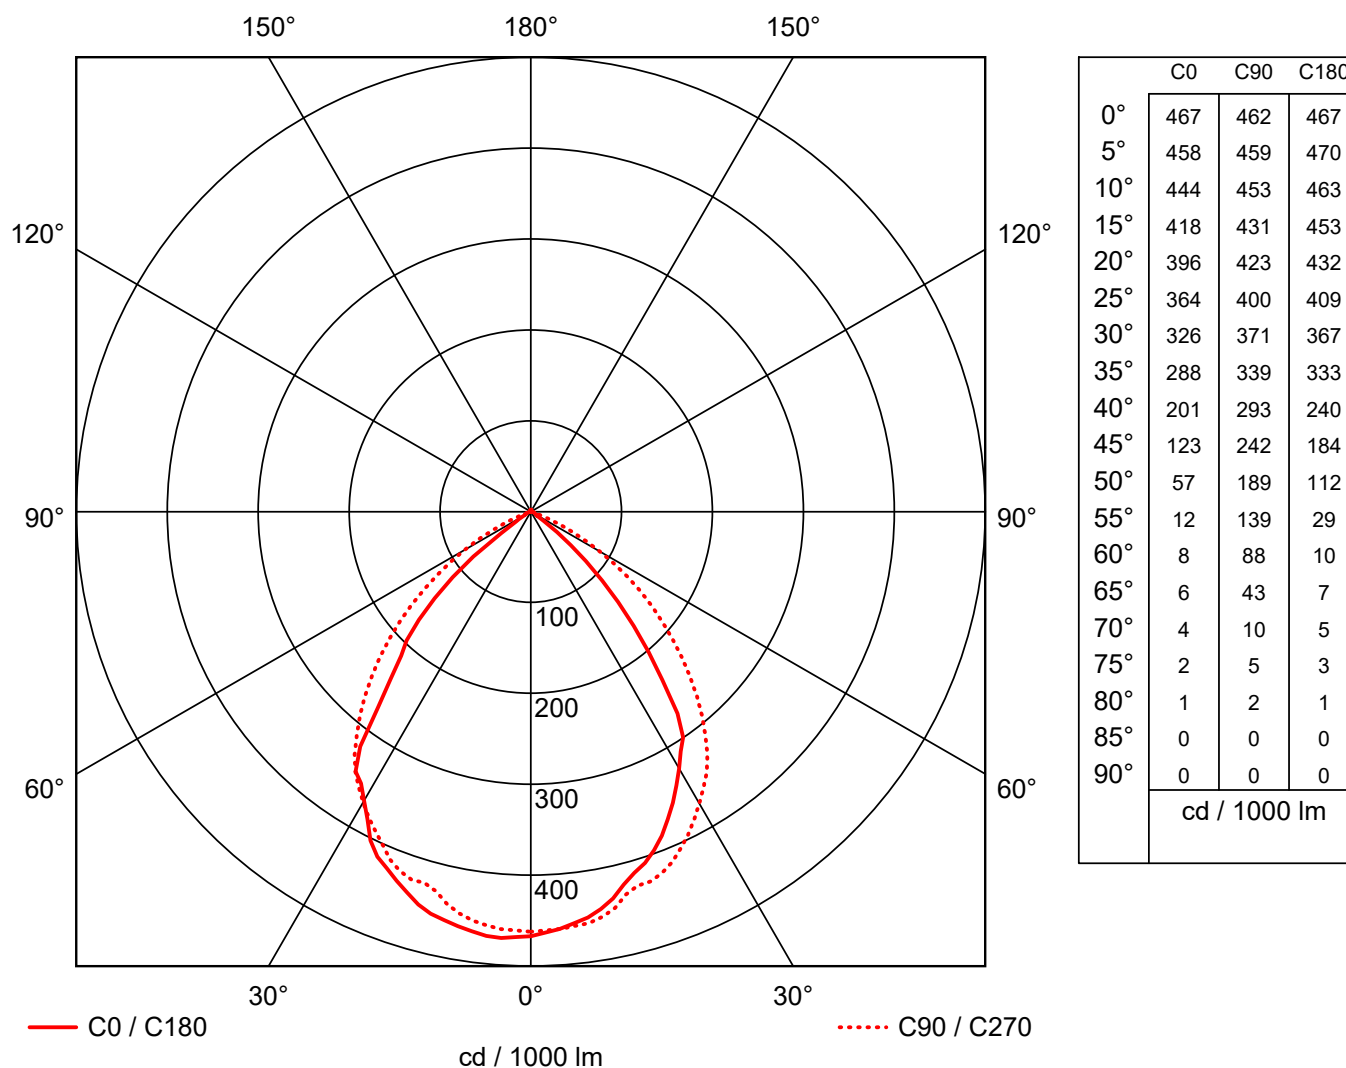

Manufacturer : ANSELL Lighting
Order number : ACALED20
Luminaire name : Calinor LED Polycarbonate Floodlight
Equipment : 1 x 4000K 20 W / 2351 lm
Dimensions : L 166 mm x W 165 mm x H 60 mm
File name : rlx_20170830132010.Idt

Efficiency factor : 81.8%
Luminaire efficacy : 96.16 lm/W (A60)
Light distribution : 37.8° C0
Beam Angle : 45.3° C90
40.1° C180
45.3° C270