

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 Ansell Lighting, Calinor LED Polycarbonate FI... (ACALED50/WW)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

ACALED50/WW

Calinor LED Polycarbonate Floodlight


Luminaire data

Luminaire efficiency : 83.7%
Luminaire efficacy : 93.99 lm/W
Classification : A60 ↓99.5% ↑0.5%
CIE Flux Codes : 70 97 100 99 84
UGR 4H 8H : 20.2 / 23.6
Power : 48 W
Luminous flux : 4511.4 lm

Equipped with

Quantity : 1
Designation : 3000K
Colour :
Luminous flux : 5390 lm

Dimensions : 220 mm x 214 mm x 78 mm

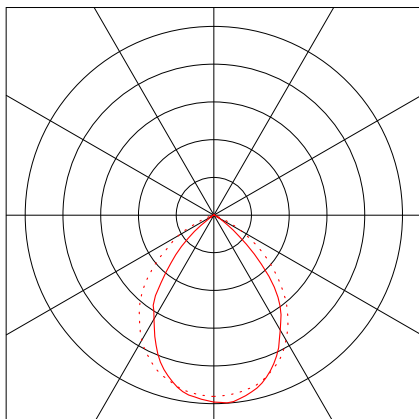


Object :
Installation :
Project number :
Date :



1.1 Ansell Lighting, Calinor LED Polycarbonate FI... (ACALED50/WW)

1.1.2 LDC

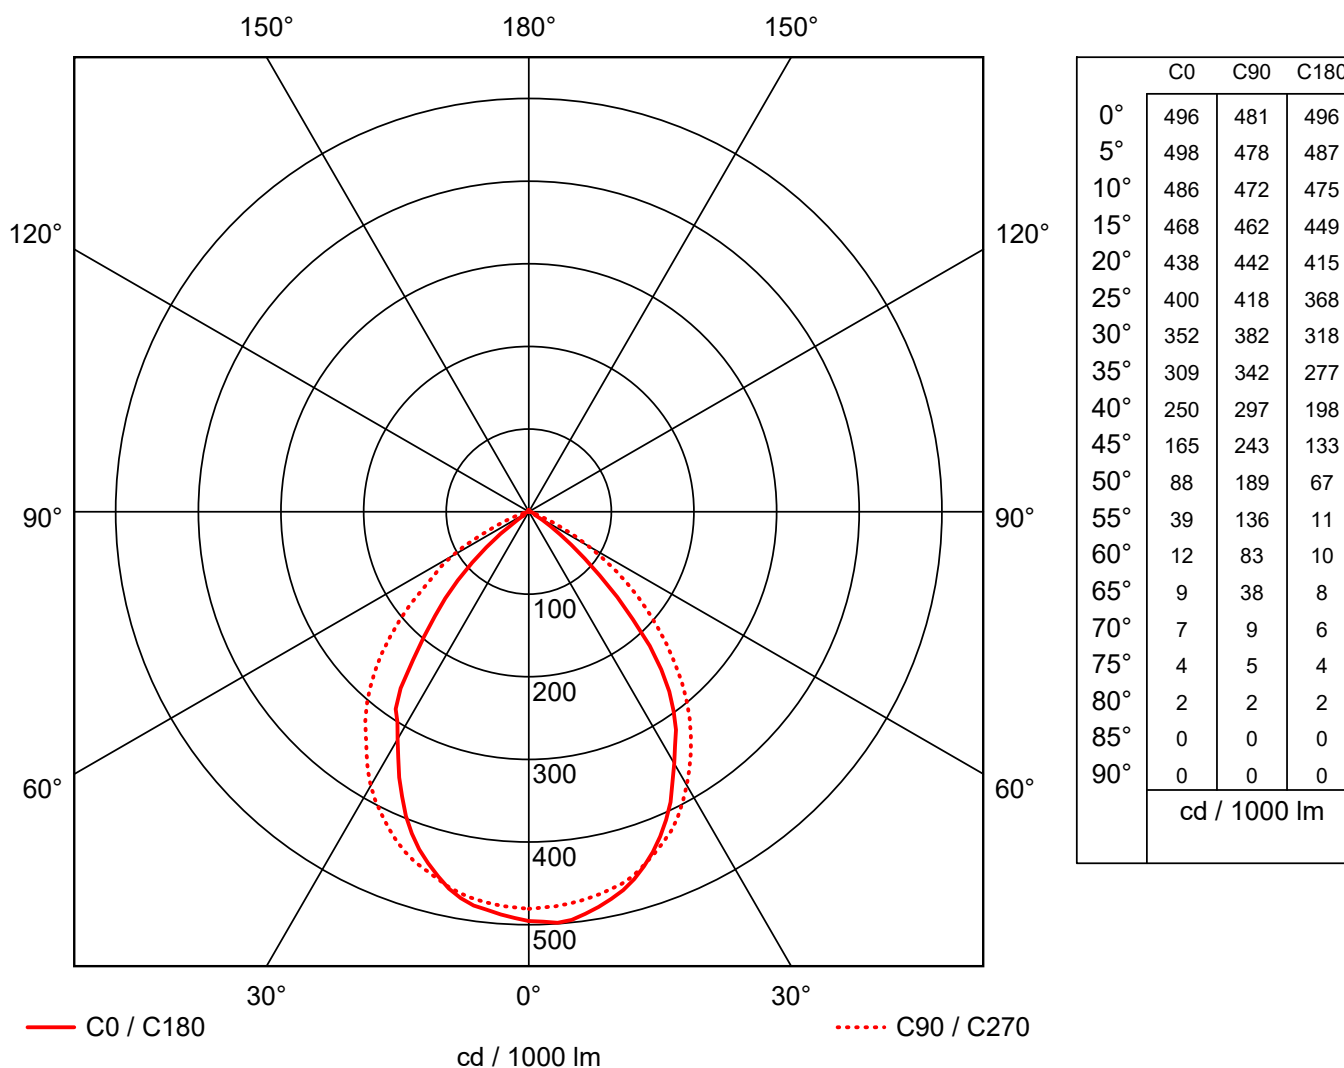

Manufacturer : Ansell Lighting
Order number : ACALED50/WW
Luminaire name : Calinor LED Polycarbonate Floodlight
Equipment : 1 x 3000K 48 W / 5390 lm
Dimensions : L 220 mm x W 214 mm x H 78 mm
File name : rlx_20170830132013.ltd

Efficiency factor : 83.7%
Luminaire efficacy : 93.99 lm/W (A60)
Light distribution :
Beam Angle : 39.7° C0
44.1° C90
36.5° C180
45.5° C270