

Object :  
Installation :  
Project number :  
Date :



## 1 Luminaire data

### 1.1 Ansell Lighting, Calinor LED Polycarbonate Flood... (ACALED50)

#### 1.1.1 Data sheet

Manufacturer: Ansell Lighting

#### ACALED50 Calinor LED Polycarbonate Floodlight


##### Luminaire data

Luminaire efficiency : 84%  
Luminaire efficacy : 99.38 lm/W  
Classification : A60 ↓99.5% ↑0.5%  
CIE Flux Codes : 70 97 100 99 84  
UGR 4H 8H : 19.9 / 23.5  
Power : 48 W  
Luminous flux : 4770.4 lm

##### Equipped with

Quantity : 1  
Designation : 4000K  
Colour :  
Luminous flux : 5679 lm

Dimensions : 220 mm x 214 mm x 78 mm

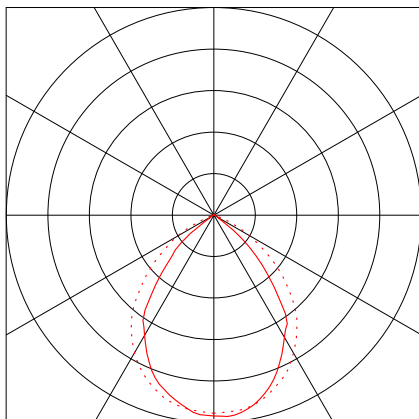


Object :  
Installation :  
Project number :  
Date :



## 1.1 Ansell Lighting, Calinor LED Polycarbonate Flood... (ACALED50)

### 1.1.2 LDC

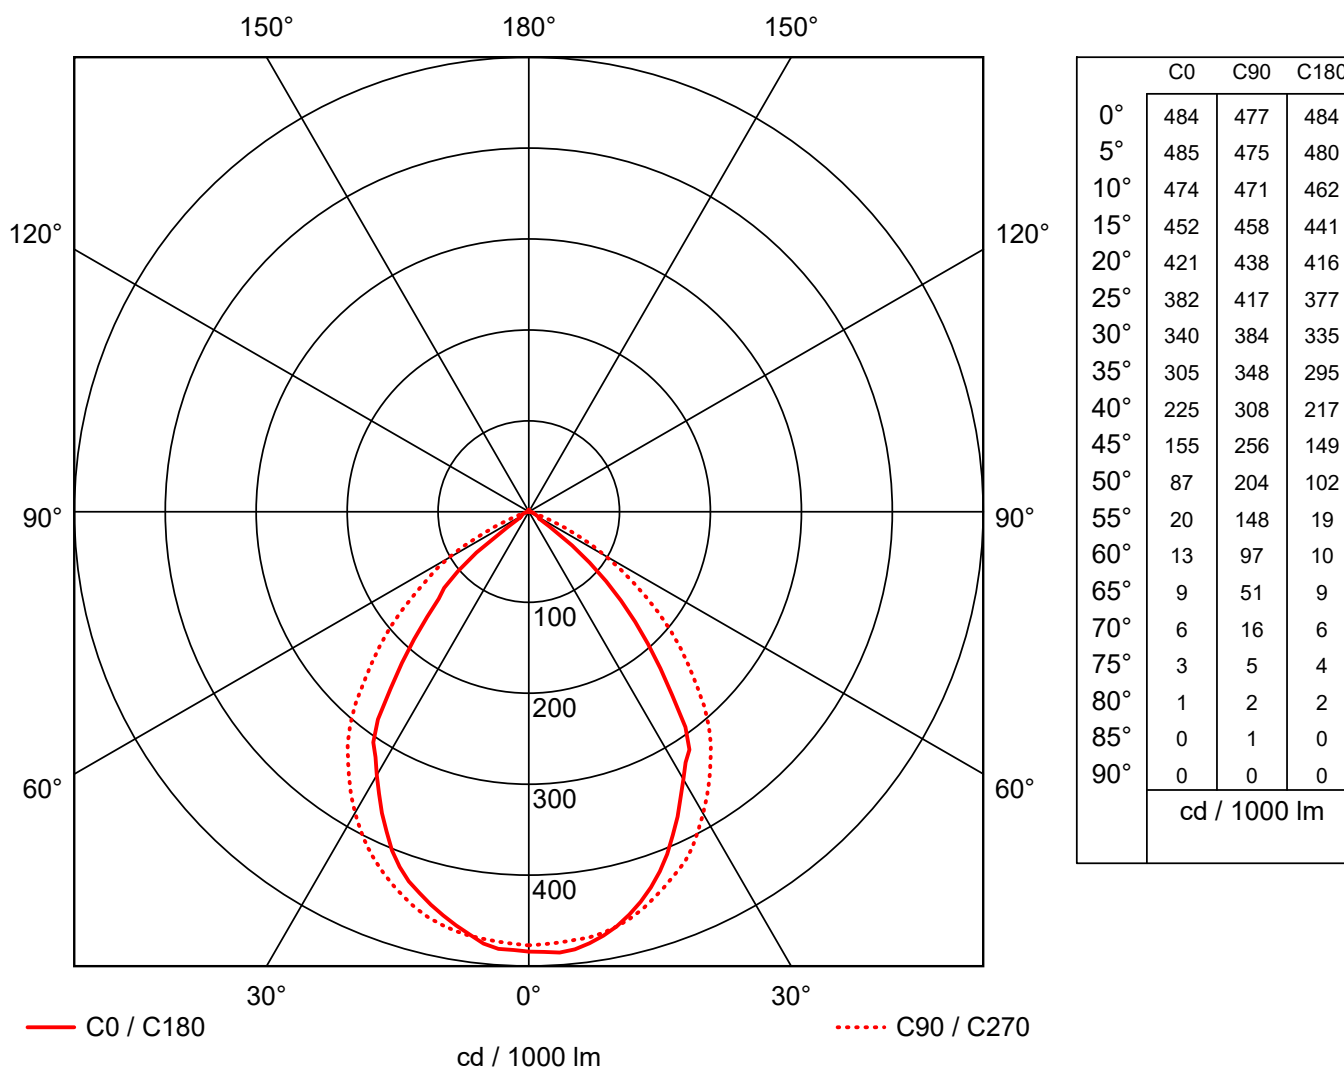

Manufacturer : Ansell Lighting  
Order number : ACALED50  
Luminaire name : Calinor LED Polycarbonate Floodlight  
Equipment : 1 x 4000K 48 W / 5679 lm  
Dimensions : L 220 mm x W 214 mm x H 78 mm  
File name : rlx\_20170830132012.ltd

Efficiency factor : 84%  
Luminaire efficacy : 99.38 lm/W (A60)  
Light distribution  
Beam Angle : 38.6° C0  
45.8° C90  
38.1° C180  
45.4° C270