

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.2 ANSELL Lighting, Comfort LED Downlight (ACOLED2/CW)

1.2.1 Data sheet

Manufacturer: ANSELL Lighting

ACOLED2/CW Comfort LED Downlight


Luminaire data

Luminaire efficiency : 88.7%
Luminaire efficacy : 91.77 lm/W
Classification : A50 ↓98.6% ↑1.4%
CIE Flux Codes : 61 90 99 99 89
UGR 4H 8H : 24.1 / 23.8
Power : 28 W
Luminous flux : 2569.6 lm

Dimensions : Ø193 mm x 1 mm

Equipped with

Quantity : 24
Designation : OSRAM GW
PSLR31 EM
4000K 24PCS
Colour :
Luminous flux : 120.7 lm

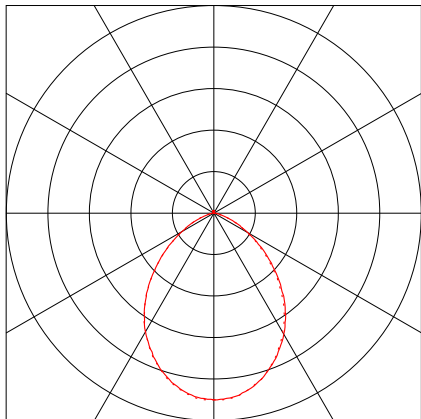


Object :
Installation :
Project number :
Date :



1.2 ANSELL Lighting, Comfort LED Downlight (ACOLED2/CW)

1.2.2 LDC

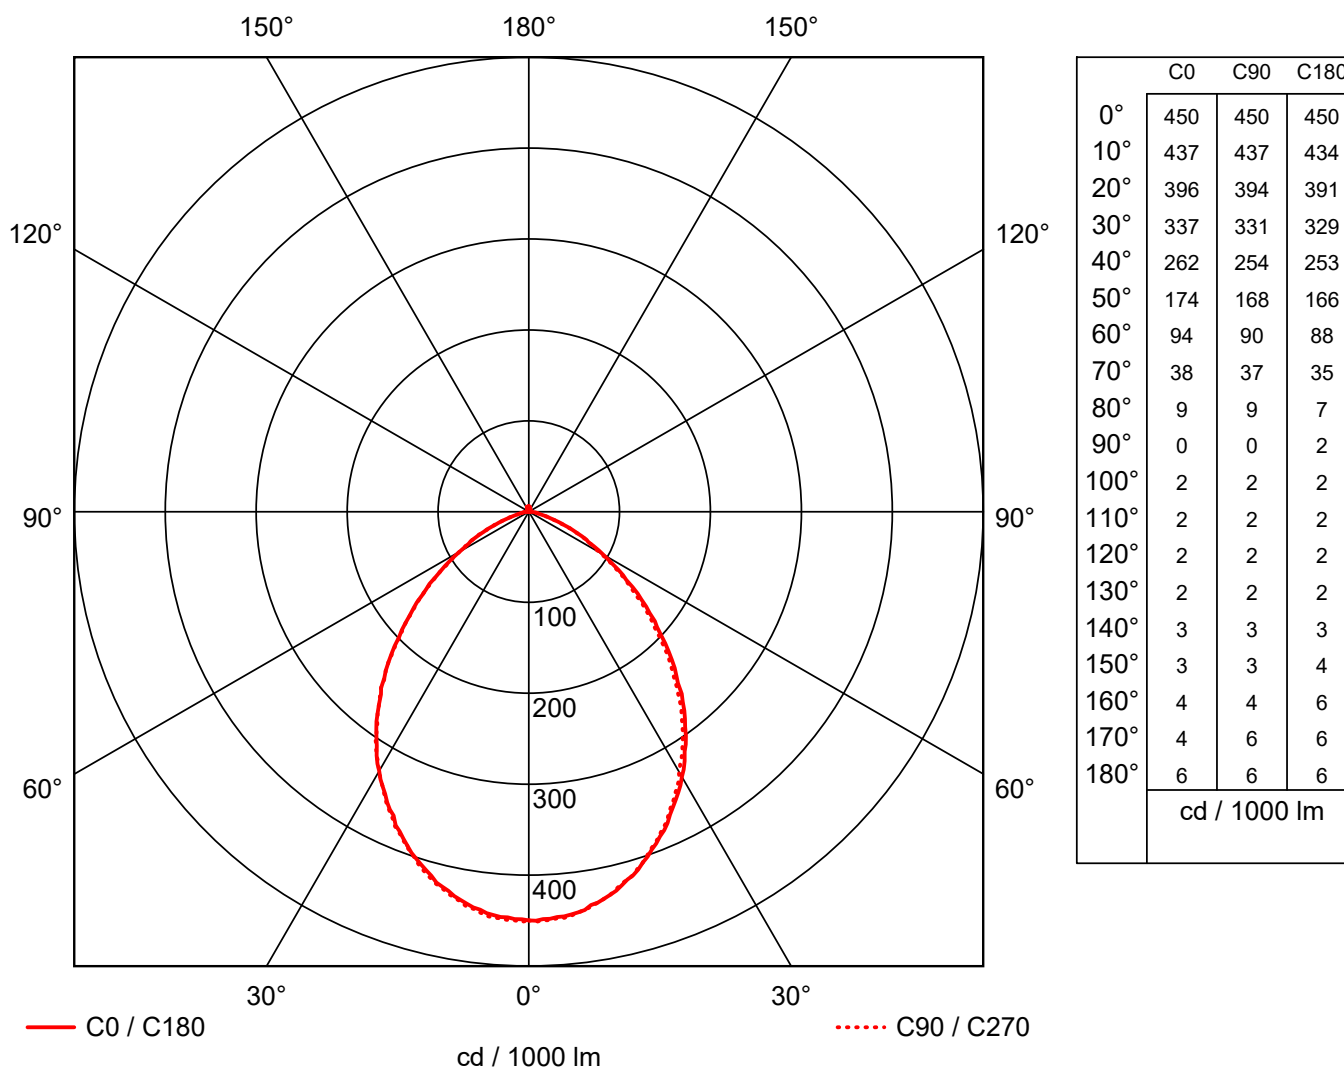

Manufacturer : ANSELL Lighting
Order number : ACOLED2/CW
Luminaire name : Comfort LED Downlight
Equipment : 24 x OSRAM GW PSLR31 EM 4000
Dimensions : D 193 mm x H 1 mm
File name : rlx_20171221091328.ldt

Efficiency factor : 88.7%
Luminaire efficacy : 91.77 lm/W (A50)
Light distribution :
Beam Angle : 44.1° C0
43.3° C90
43.1° C180
43.1° C270