

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 Ansell, COMMERCIAL - Defender LED IP65 Cl... (ADELED)

1.1.1 Data sheet

Manufacturer: Ansell

ADELED COMMERCIAL - Defender LED IP65 Clean Air Recessed Modular


Luminaire data

Luminaire efficiency : 75.4%
Luminaire efficacy : 95.1 lm/W
Classification : A40 ↓100.0% ↑0.0%
CIE Flux Codes : 49 80 96 100 75
UGR 4H 8H : 21.2 / 21.3
Power : 49 W
Luminous flux : 4659.7 lm

Equipped with

Quantity : 1
Designation : None 0
Colour :
Luminous flux : 6180 lm

Dimensions : 598 mm x 598 mm x 5 mm

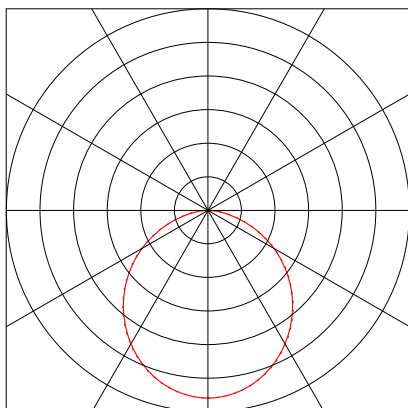


Object :
Installation :
Project number :
Date :



1.1 Ansell, COMMERCIAL - Defender LED IP65 Cl... (ADELED)

1.1.2 LDC

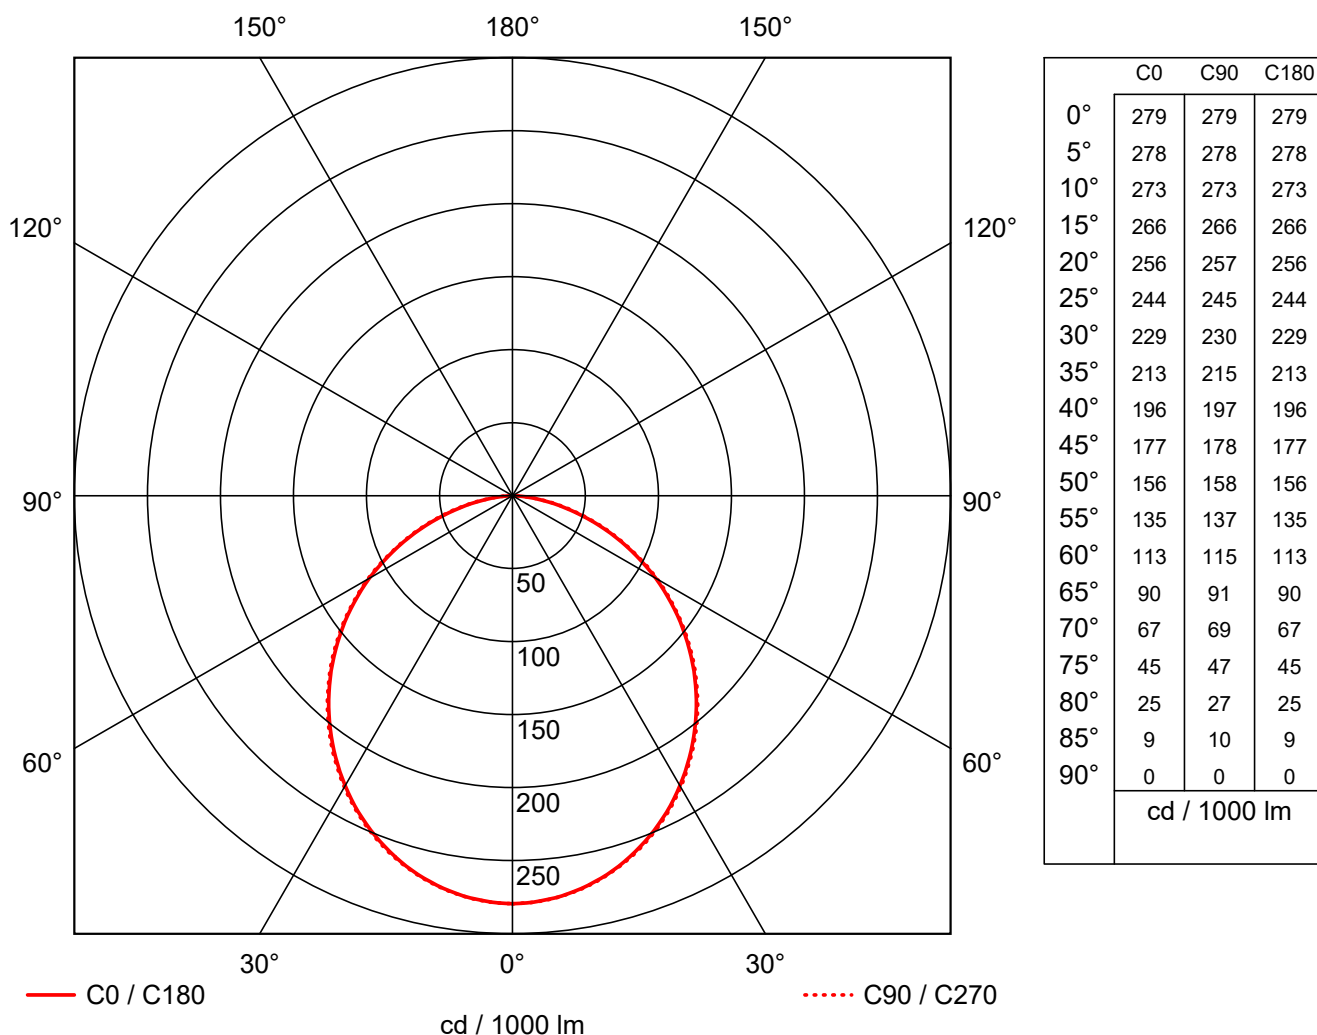

Manufacturer	: Ansell	Efficiency factor	: 75.4%
Order number	: ADELED	Luminaire efficacy	: 95.1 lm/W (A40)
Luminaire name	: COMMERCIAL - Defender LED	Light distribution	: sym. to C0-C180 / C90-C270
	IP65 Clean Air Recessed Modular	Beam Angle	: 108.0° C0-C180
Equipment	: 1 x None 0 49 W / 6180 lm		108.5° C90-C270
Dimensions	: L 598 mm x W 598 mm x H 5 mm		
File name	: ADELED.Idt		