

1 Luminaire data

1.1 Ansell Lighting, Defender LED IP65 Clean Air R... (ADELED.IES)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

ADELED.IES Defender LED IP65 Clean Air Recessed Modular


Luminaire data

Luminaire efficiency : 74.5%
Luminaire efficacy : 93.96 lm/W
Classification : A40 ↓99.4% ↑0.6%
CIE Flux Codes : 47 79 95 99 74
UGR 4H 8H : 21.5 / 21.2
Power : 50 W
Luminous flux : 4698 lm

Equipped with


Quantity : 1
Designation : 4000K
Colour :
Luminous flux : 6306 lm

Dimensions : 598 mm x 598 mm x 1 mm

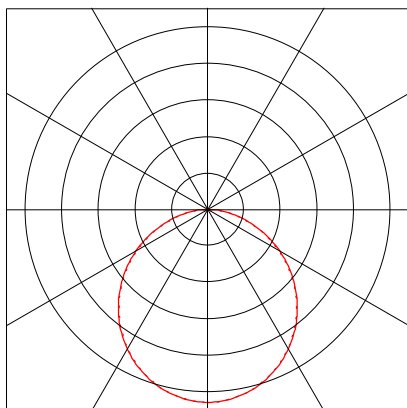

1.1 Ansell Lighting, Defender LED IP65 Clean Air R... (ADELED.IES)

1.1.2 LDC

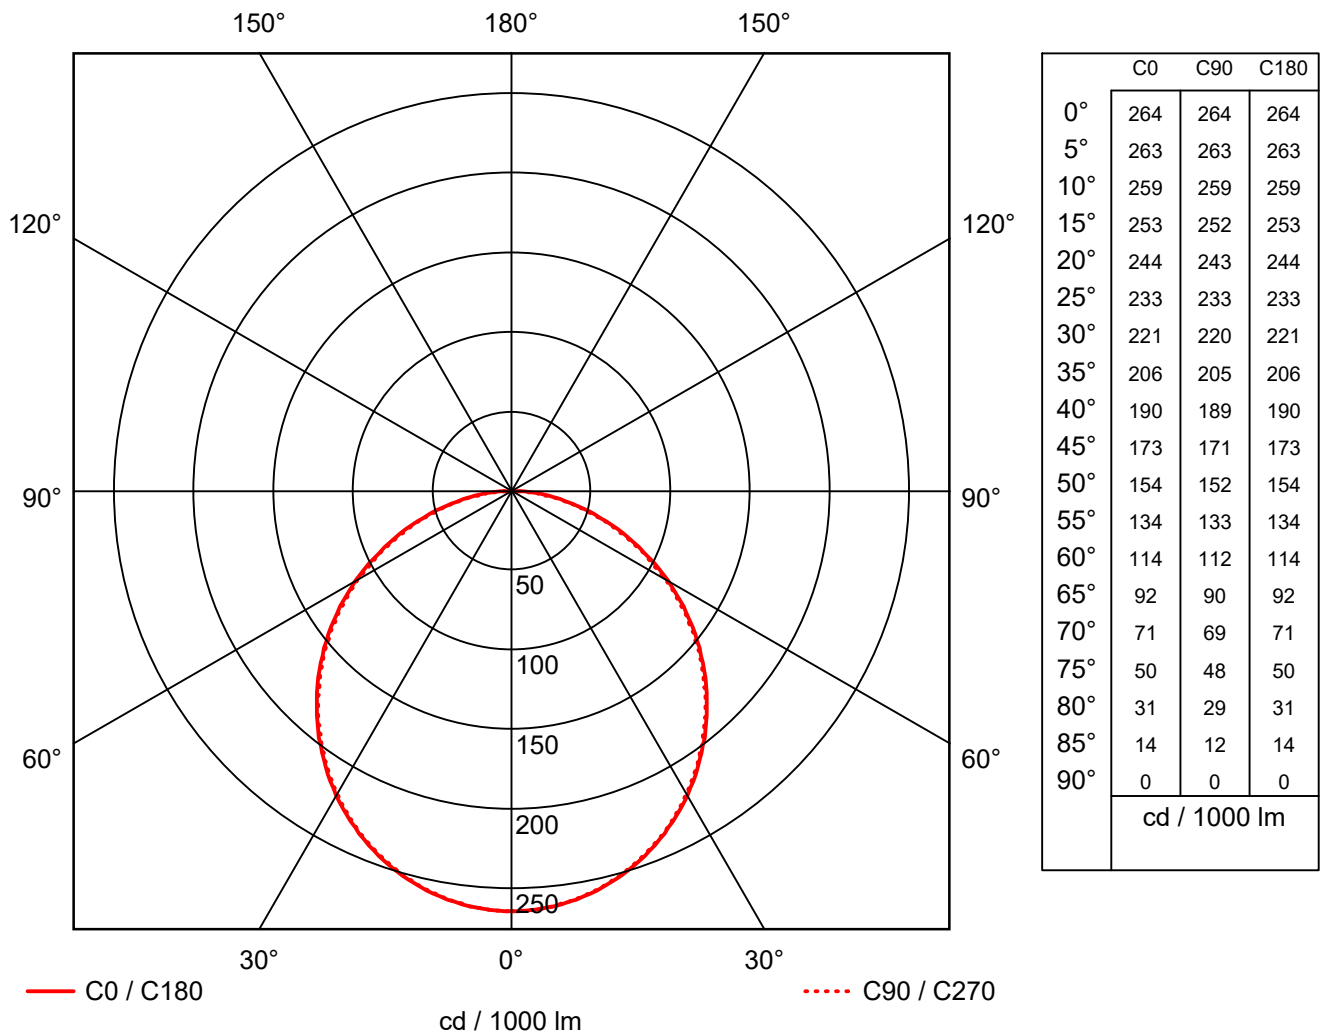

Manufacturer : Ansell Lighting
 Order number : ADELED.IES
 Luminaire name : Defender LED IP65 Clean Air Recessed Modular
 Equipment : 1 x 4000K 50 W / 6306 lm
 Dimensions : L 598 mm x W 598 mm x H 1 mm
 File name : rlx_20210623124137.Idt

Efficiency factor : 74.5%
 Luminaire efficacy : 93.96 lm/W (A40)
 Light distribution : sym. to C0-C180 / C90-C270
 Beam Angle : 111.1° C0-C180
 110.2° C90-C270