


Arteor™


British standard socket outlets

USB Type-A - Type-C charger

Cat. No(s): 5 721 42/56/58
5 726 42/56/58



5 72X 58

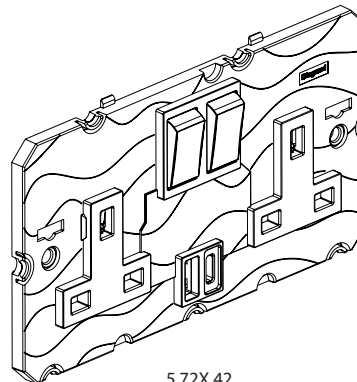

5 72X 42


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks. Mechanism supplied with rocker plate, to be equipped with special plate Support frame not needed. Shuttered for child safety.

2. RANGE

Description	White	Magnesium
2P+E 1 gang unswitched + 1 USB Type-A (1 output Type-A)	5 721 58	5 726 58
2P+E 1 gang switched + 1 USB Type-A (1 output Type-A)	5 721 56	5 726 56
2 x 2P+E 2 gang switched + 1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	5 721 42	5 726 42

3. DIMENSIONS (mm)

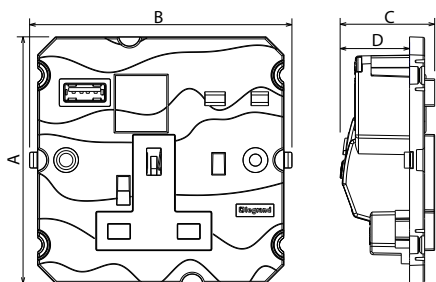

References	A	B	C	D
5 72X 42	83.5	143.2	31.5	19.8
5 72X 56	78.5	83.5	33.3	22.2
5 72X 58	78.5	83.5	30.2	22.2

4. CONNECTION

Type of terminals: with screws
Terminal capacity: 4 x 2.5 mm² - 3 x 4 mm² - 2 x 6mm²
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
Penetration by solid bodies/liquid: IP 02

■ 5.2 Material characteristics

Base: PP
Cover-plate: PC
Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place.
+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Climatic characteristics

Storage temperature: - 20° C to + 70° C
Operating temperature: 0° C to + 45° C

■ 5.4 Electrical characteristics

Voltage: 250 V~
Current: 13 A
Frequency: 50/60 Hz

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Type	1 USB	2 USB
Nominal input voltage	220 - 250 V~	
Nominal input frequency	50-60 Hz	
Power consumption	12 W	15 W
Maximum input current	300 mA	
Maximum power consumption in standby	0.075 W	
Power average efficiency	80.3 %	
Nominal output voltage	5 V=	
Maximum output current	2.4 A	3 A*
No-load consumption and average energy efficiency: Level VI**		
Protection class	II - Low voltage	

* Note : shared on A and C output

**Note : European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure to turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.