

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 Ansell LIGHTING, AMRLED1/GR/CPC... (IP65 Multiray LED Highb...)

1.1.1 Data sheet

Manufacturer: Ansell LIGHTING

IP65 Multiray LED Highbay (Polycarbonate Cover)

AMRLED1/GR/CPC


Luminaire data

Luminaire efficiency : 91.8%
Luminaire efficacy : 94.05 lm/W
Classification : A60 ↓100.0% ↑0.0%
CIE Flux Codes : 81 99 100 100 92
UGR 4H 8H : 17.9 / 20.1
Power : 108 W
Luminous flux : 10157.7 lm

Equipped with

Quantity : 1
Designation :
Colour :
Luminous flux : 11065 lm

Dimensions : Ø345 mm x 109 mm

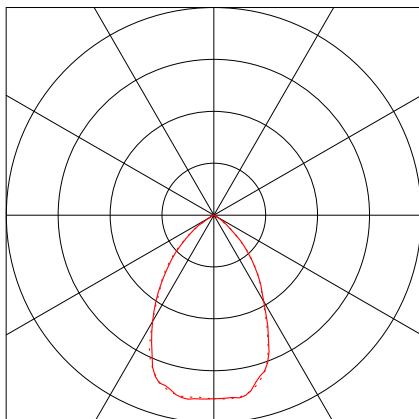


Object :
Installation :
Project number :
Date :



1.1 Ansell LIGHTING, AMRLED1/GR/CPC... (IP65 Multiray LED Highb...)

1.1.2 LDC

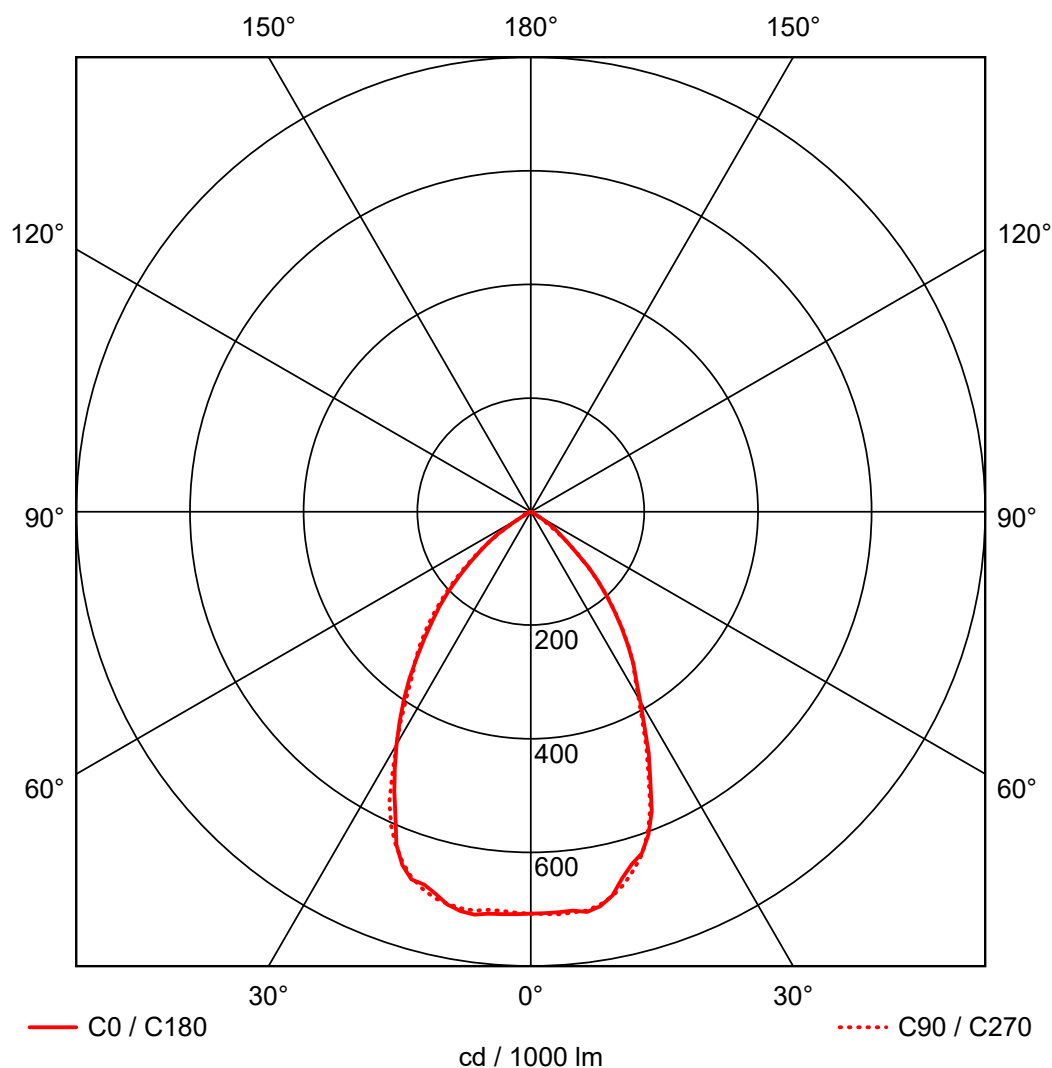

	C0	C90	C180
0°	708	708	708
5°	707	710	711
10°	705	703	714
15°	655	667	688
20°	605	602	662
25°	495	487	568
30°	385	380	473
35°	307	308	382
40°	229	232	292
45°	157	156	216
50°	84	84	141
55°	46	27	81
60°	8	8	20
65°	5	4	12
70°	2	3	3
75°	1	1	2
80°	0	1	1
85°	0	0	0
90°	0	0	0
cd / 1000 lm			

Manufacturer : Ansell LIGHTING
Order number : IP65 Multiray LED Highbay (Polycart)
Luminaire name : AMRLED1/GR/CPC
Equipment : 1 x 108 W / 11065 lm
Dimensions : D 345 mm x H 109 mm
File name : rlx_20170830123825.ldt

Efficiency factor : 91.8%
Luminaire efficacy : 94.05 lm/W (A60)
Light distribution
Beam Angle : 31.8° C0
31.6° C90
36.4° C180
36.0° C270