

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL LIGHTING, AMRLED2/GR/CPC... (IP65 Multiray LED (Poly...))

1.1.1 Data sheet

Manufacturer: ANSELL LIGHTING

IP65 Multiray LED (Polycarbonate Cover)

AMRLED2/GR/CPC


Luminaire data

Luminaire efficiency : 92.4%
Luminaire efficacy : 111.19 lm/W
Classification : A60 ↓100.0% ↑0.0%
CIE Flux Codes : 80 99 100 100 92
UGR 4H 8H : 20.2 / 20.3
Power : 134 W
Luminous flux : 14899.5 lm

Equipped with

Quantity : 3
Designation :
Colour :
Luminous flux : 5375 lm

Dimensions : Ø345 mm x 109 mm

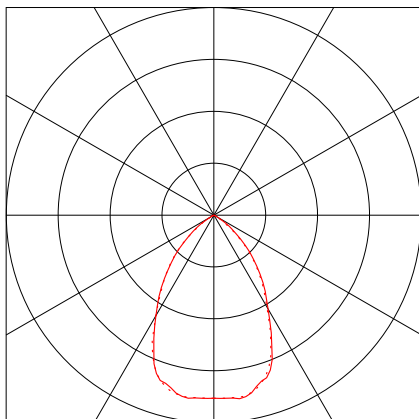


Object :
Installation :
Project number :
Date :



1.1 ANSELL LIGHTING, AMRLED2/GR/CPC... (IP65 Multiray LED (Poly...))

1.1.2 LDC

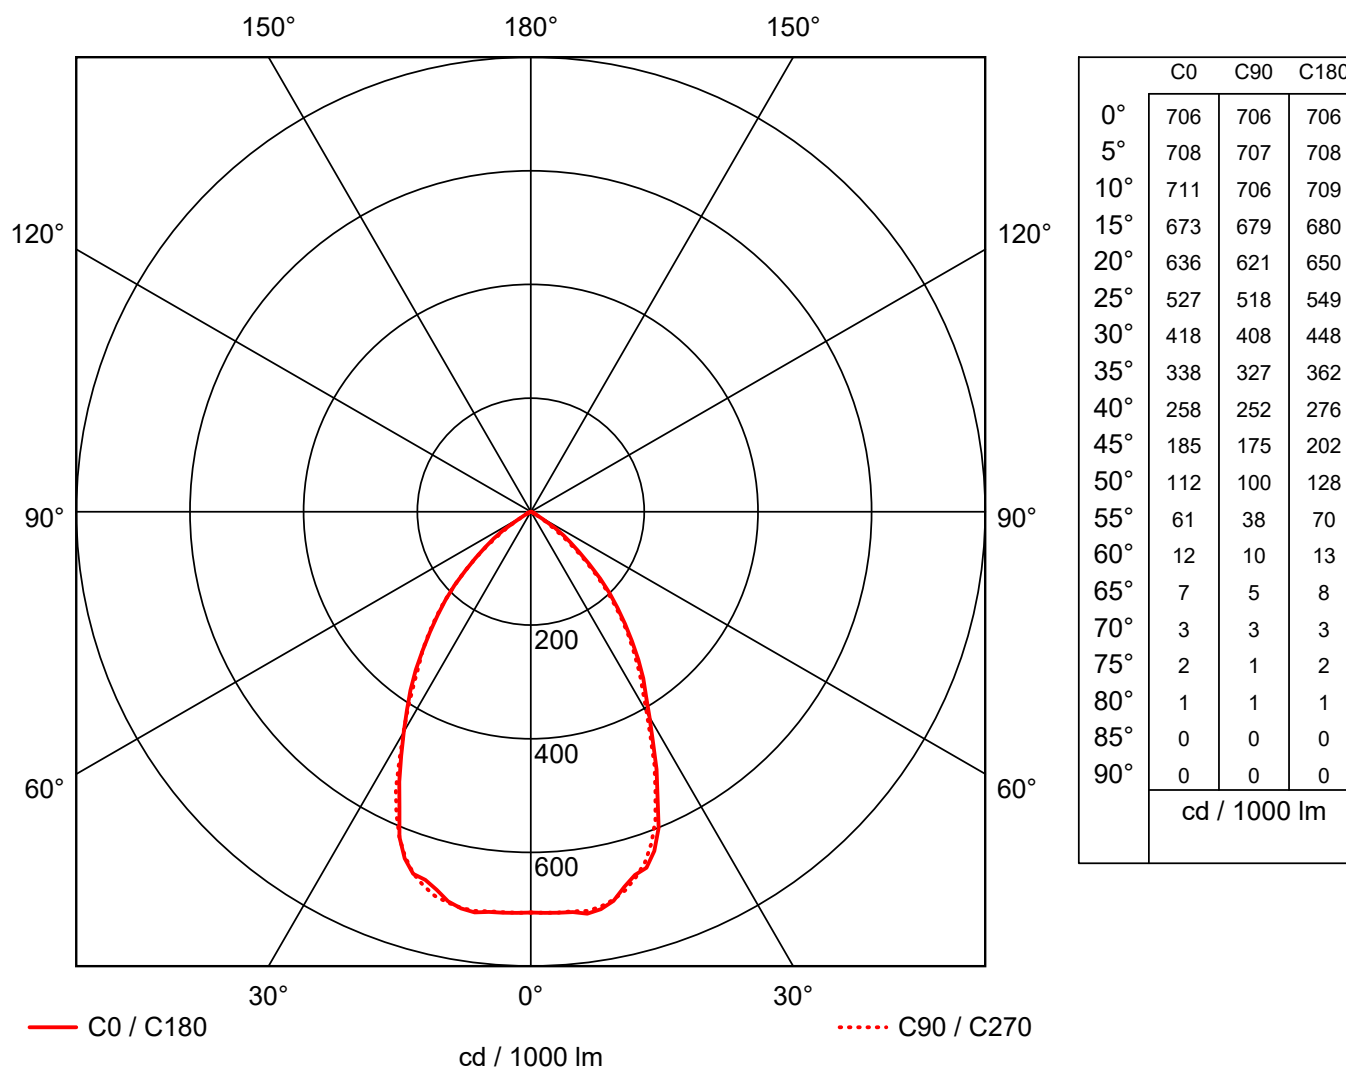

Manufacturer : ANSELL LIGHTING
Order number : IP65 Multiray LED (Polycarbonate C
Luminaire name : AMRLED2/GR/CPC
Equipment : 3 x / 5375 lm
Dimensions : D 345 mm x H 109 mm
File name : rlx_20170830123831.ldt

Efficiency factor : 92.4%
Luminaire efficacy : 111.19 lm/W (A60)
Light distribution
Beam Angle : 33.9° C0
33.2° C90
35.4° C180
34.9° C270