

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL LIGHTING, AMRLED3/GR (IP65 Multiray LED (Glass))

1.1.1 Data sheet

Manufacturer: ANSELL LIGHTING

IP65 Multiray LED (Glass)

AMRLED3/GR


Luminaire data

Luminaire efficiency : 70%
Luminaire efficacy : 109.72 lm/W
Classification : A60 ↓100.0% ↑0.0%
CIE Flux Codes : 80 99 100 100 70
UGR 4H 8H : 18.7 / 21.3
Power : 168 W
Luminous flux : 18433.8 lm

Dimensions : Ø345 mm x 109 mm

Equipped with

Quantity : 3
Designation :
Colour :
Luminous flux : 8778 lm

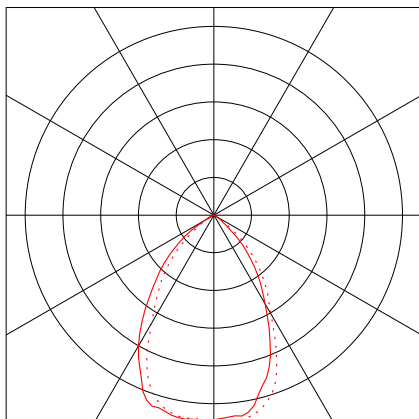


Object :
 Installation :
 Project number :
 Date :



1.1 ANSELL LIGHTING, AMRLED3/GR (IP65 Multiray LED (Glass))

1.1.2 LDC

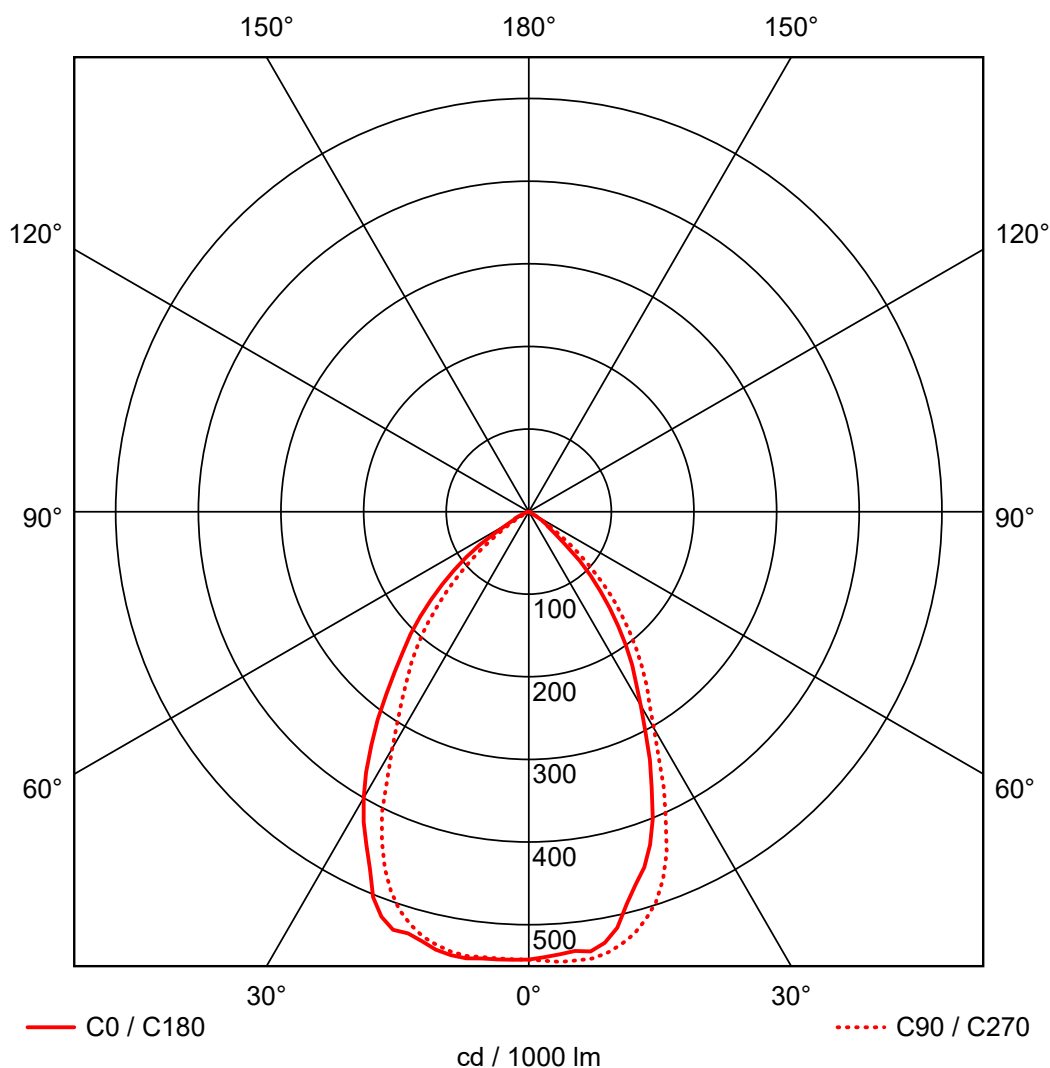

	C0	C90	C180
0°	542	542	542
5°	536	546	543
10°	530	543	545
15°	479	520	533
20°	429	474	522
25°	350	390	461
30°	271	303	400
35°	212	245	326
40°	153	190	253
45°	97	136	195
50°	41	80	137
55°	23	30	83
60°	4	7	29
65°	3	4	16
70°	1	2	3
75°	1	1	2
80°	0	1	1
85°	0	0	0
90°	0	0	0
cd / 1000 lm			

Manufacturer : ANSELL LIGHTING
 Order number : IP65 Multiray LED (Glass)
 Luminaire name : AMRLED3/GR
 Equipment : 3 x / 8778 lm
 Dimensions : D 345 mm x H 109 mm
 File name : rlx_20170830123834.ldt

Efficiency factor : 70%
 Luminaire efficacy : 109.72 lm/W (A60)
 Light distribution :
 Beam Angle : 29.9° C0
 32.5° C90
 38.6° C180
 34.2° C270