

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Oxford LED Surface Linear (AOXLED2X4)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AOXLED2X4 Oxford LED Surface Linear


Luminaire data

Luminaire efficiency : 80.3%
Luminaire efficacy : 111.2 lm/W
Classification : A40 ↓99.9% ↑0.1%
CIE Flux Codes : 44 74 92 100 82
UGR 4H 8H : 24.0 / 22.4
Power : 38.2 W
Luminous flux : 4247.9 lm

Equipped with

Quantity : 1
Designation : LG 5630
Colour : 4000K
Luminous flux : 5290 lm
Colour reproduction : 80

Dimensions : 1190 mm x 165 mm x 70 mm

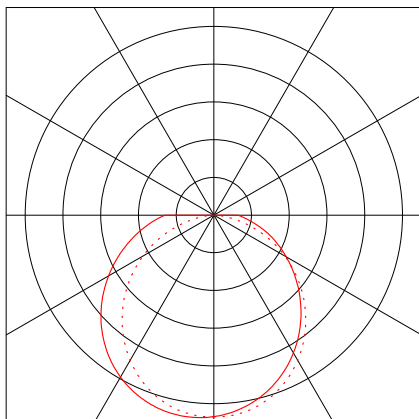


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Oxford LED Surface Linear (AOXLED2X4)

1.1.2 LDC

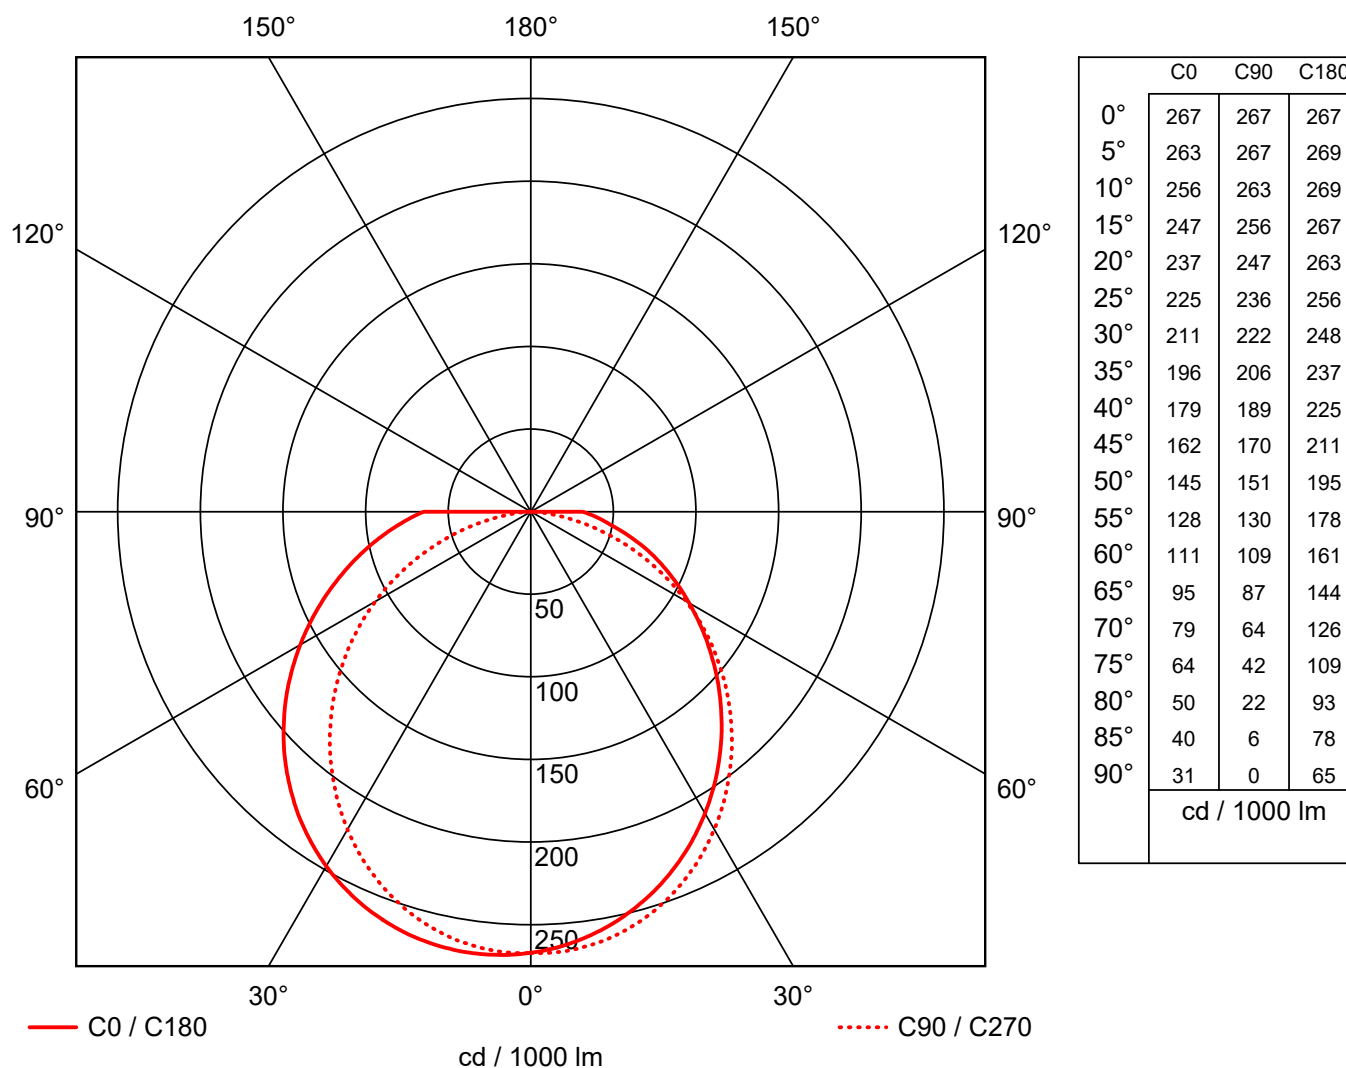

Manufacturer : ANSELL Lighting
Order number : AOXLED2X4
Luminaire name : Oxford LED Surface Linear
Equipment : 1 x LG 5630 38.2 W / 5290 lm
Dimensions : L 1190 mm x W 165 mm x H 70 mm
File name : AOXLED2X4.Idt

Efficiency factor : 80.3%
Luminaire efficacy : 111.2 lm/W (A40)
Light distribution : sym. to C0-C180
Beam Angle : 107.8° C90-C270
52.9° C0
67.5° C180