

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Oxford LED Surface Linear (AOXLED2X5)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AOXLED2X5 Oxford LED Surface Linear


Luminaire data

Luminaire efficiency : 80.2%
Luminaire efficacy : 109.19 lm/W
Classification : A40 ↓99.9% ↑0.1%
CIE Flux Codes : 44 75 92 100 80
UGR 4H 8H : 25.9 / 22.6
Power : 60 W
Luminous flux : 6551.5 lm

Equipped with

Quantity : 1
Designation : 4000K
Colour :
Luminous flux : 8169 lm

Dimensions : 165 mm x 1470 mm x 50 mm

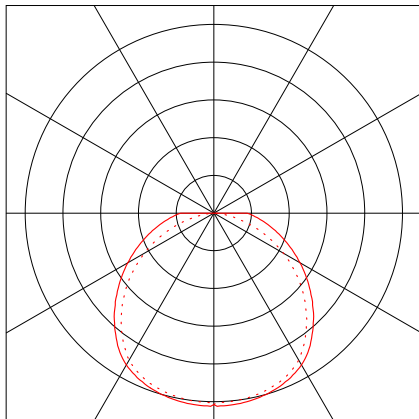


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Oxford LED Surface Linear (AOXLED2X5)

1.1.2 LDC

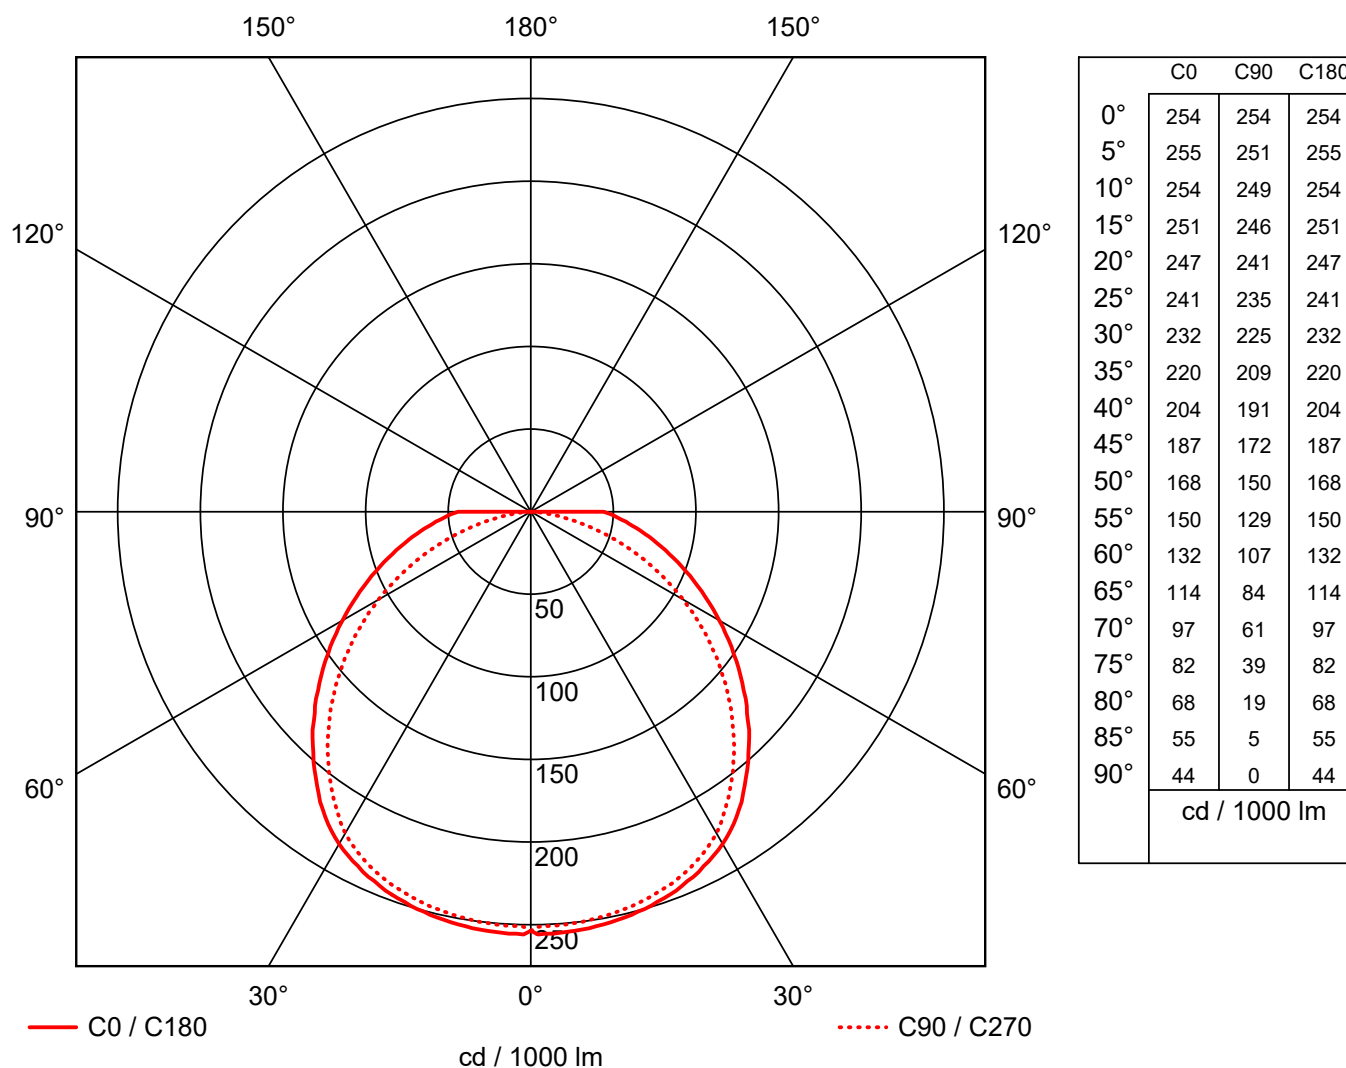

Manufacturer : ANSELL Lighting
Order number : AOXLED2X5
Luminaire name : Oxford LED Surface Linear
Equipment : 1 x 4000K 60 W / 8169 lm
Dimensions : L 165 mm x W 1470 mm x H 50 mm
File name : rlx_20170830121700.ldt

Efficiency factor : 80.2%
Luminaire efficacy : 109.19 lm/W (A40)
Light distribution
Beam Angle : 61.0° C0
55.2° C90
61.0° C180
55.2° C270