

Dimensions **opposite**
 Technical information p. 7-8


Breaking capacity:
 10000 - IEC 61009-1 for single pole
 • AC type : detect AC component faults

| Pack | Cat. Nos. | Single pole - 230 V~ - C curve | Nominal rating In (A) | Number of modules |
|------|-----------|--------------------------------|-----------------------|-------------------|
| | | Blue neutral leads | | |
| | | AC Type 30 mA | | |
| | | C curve | | |
| 1 | 4189 80 | | 6 | 1 |
| 1 | 4189 81 | | 10 | 1 |
| 1 | 4189 82 | | 16 | 1 |
| 1 | 4189 83 | | 20 | 1 |
| 1 | 4189 84 | | 25 | 1 |
| 1 | 4189 85 | | 32 | 1 |
| 1 | 4189 86 | | 40 | 1 |
| 1 | 4189 87 | | 45 | 1 |

| | | Auxiliaries for RCBOs | |
|---|---------|---|-------------------|
| | | Clip on the left hand side of the RCBO (maximum 3) Allow insertion of the supply busbar at the top Auxiliaries common to DX ³ MCBs, RCDs and RCBOs | |
| | | Signalling auxiliaries | Number of modules |
| 1 | 4062 58 | Auxiliary changeover switch, 6 A - 250 V~ Indicates the position of the contacts | 0.5 |
| 1 | 4062 60 | Fault signalling changeover switch, 6 A - 250 V~ Indicates tripping of the RCBO at a fault | 0.5 |
| 1 | 4062 62 | Auxiliary changeover switch, 6 A - 250 V which can be modified to a fault signalling switch | 0.5 |
| 1 | 4062 66 | Auxiliary changeover switch, 6 A - 250 V + fault signalling switch, can be modified to 2 auxiliary changeover switches | 1 |

| | | Accessories | |
|----|---------|---|--|
| | | Padlocking | |
| 2 | 4063 03 | Support for one Ø5 mm padlock for DX ³ MCBs and RCDs or isolating switches | |
| 3 | 4063 13 | Ø5 mm shackle type padlock | |
| | | Spacing element | |
| 10 | 4063 07 | For heat reduction – 0.5 module | |

Dimensions

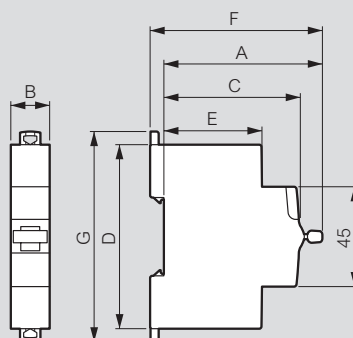

| Description | Dimension (mm) | | | | | | | | | | |
|---|----------------|------------|------|------|------|-------|-----|-----|----|-------|-------|
| | A | B | | | | C | D | E | F | G | |
| | 1P | 1P+N | 2P | 3P | 4P | | | | | | |
| DX ³ MCBs up to 63 A | 71.7 | 17.7 | 35.4 | 35.4 | 53.1 | 70.8 | 61 | 83 | 44 | 77.8 | 94.8 |
| DX ³ MCBs from 80 A to 125 A | 73.1 | 26.7 | – | 53.4 | 80.1 | 106.8 | 61 | 100 | 47 | 79 | 104.3 |
| DX ³ RCDs | 71.7 | – | – | 35.6 | – | 71.2 | 61 | 83 | 44 | 77.8 | 94.8 |
| DX ³ RCBOs 1P (up to 45 A) | 68 | 17.7 | – | – | – | 60 | 115 | 48 | 74 | 126.8 | |
| DX ³ RCBOs 1P+N (up to 40 A) & 4P (up to 32 A) | 71.7 | – | 35.6 | – | – | 71.2 | 61 | 83 | 44 | 77.8 | 94.8 |
| DX ³ RCBOs 2P & 4P (40 A to 63 A) | 72 | – | – | 71.2 | – | 124.6 | 61 | 96 | 44 | 78.2 | 107.8 |
| DX ³ auxiliaries | 71.5 | 8.8 / 17.7 | | | | | 61 | 83 | 44 | 77.7 | 84.5 |