

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Top Line 6 LED Batten (ATLLED2X6)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ATLLED2X6 **Top Line 6 LED Batten**

Luminaire data


Absolute Photometry

Luminaire efficacy : 108.47 lm/W
Classification : B31 ↓88.1% ↑11.9%
CIE Flux Codes : 38 66 87 88 100
UGR 4H 8H : 23.9 / 32.5
Power : 83 W
Luminous flux : 9003 lm

Equipped with

Quantity : 1
Designation : 4000K
Colour :

Dimensions : 1635 mm x 30 mm x 30 mm

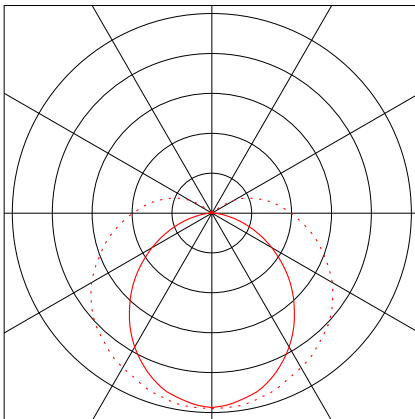


Object :
 Installation :
 Project number :
 Date :



1.1 ANSELL Lighting, Top Line 6 LED Batten (ATLLED2X6)

1.1.2 LDC

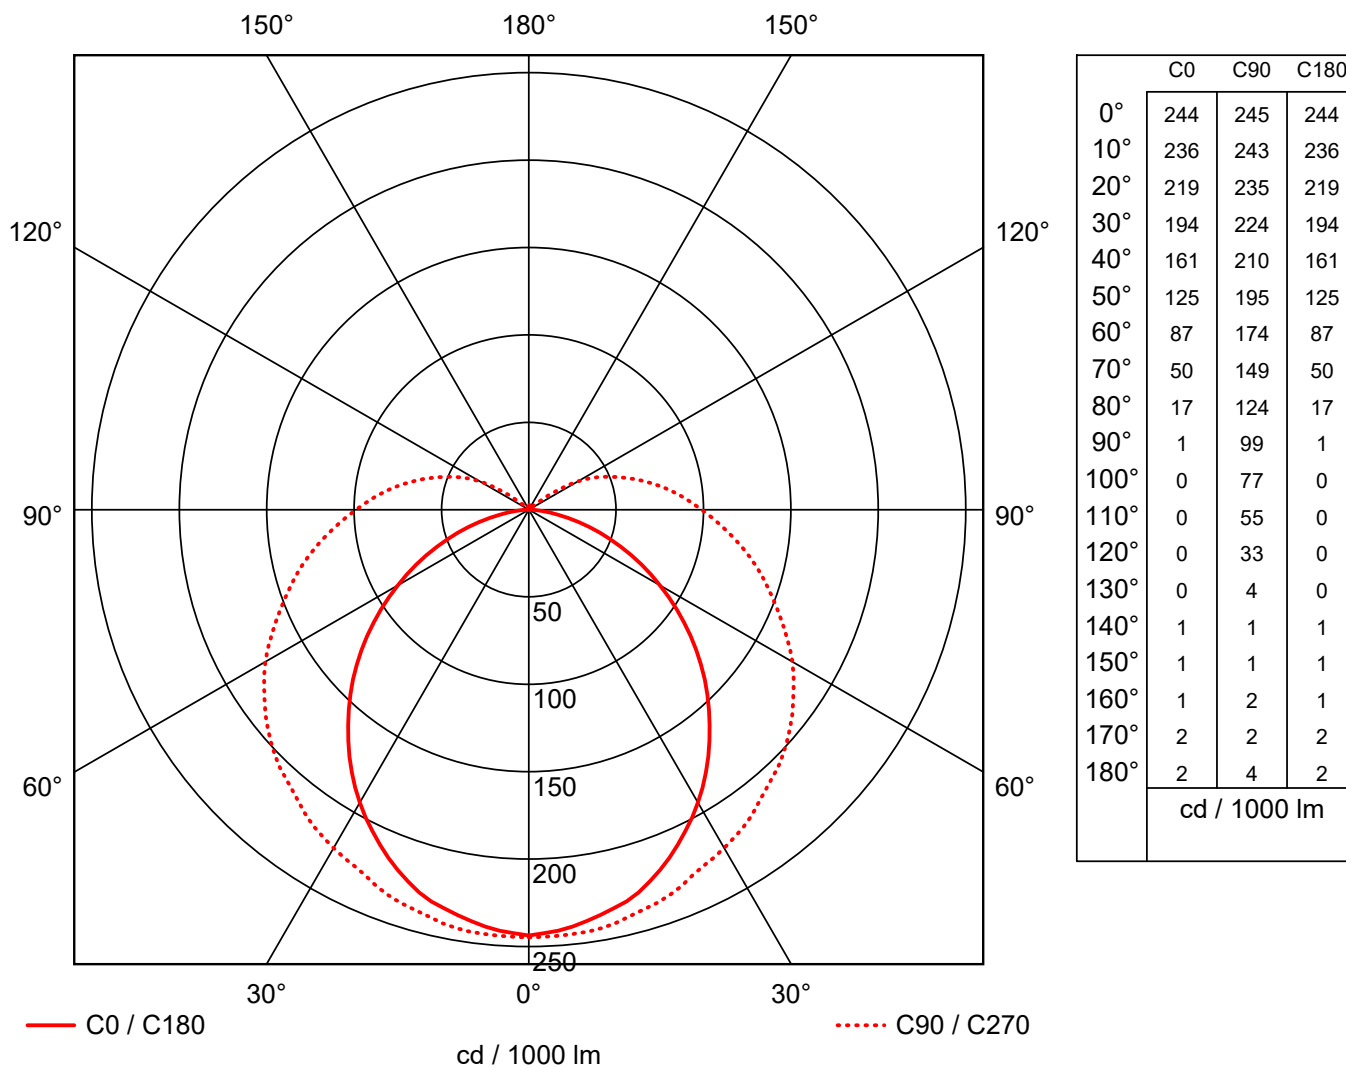

Manufacturer : ANSELL Lighting
 Order number : ATLLED2X6
 Luminaire name : Top Line 6 LED Batten
 Equipment : 1 x 4000K 83 W / 9003 lm
 Dimensions : L 1635 mm x W 30 mm x H 30 mm
 File name : rlx_20171221095055.ldt

Luminaire efficacy : 108.47 lm/W (B31)
 Light distribution : sym. to C0-C180 / C90-C270
 Beam Angle : 100.9° C0-C180
 160.4° C90-C270