

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Topline 6 LED Batten (ATLLED6)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ATLLED6 Topline 6 LED Batten

Luminaire data


Absolute Photometry

Luminaire efficacy : 106.63 lm/W
Classification : B31 ↓88.0% ↑12.0%
CIE Flux Codes : 38 66 87 88 100
UGR 4H 8H : 21.4 / 30.0
Power : 41 W
Luminous flux : 4372 lm

Equipped with

Quantity : 1
Designation : 4000K
Colour :

Dimensions : 1635 mm x 30 mm x 30 mm

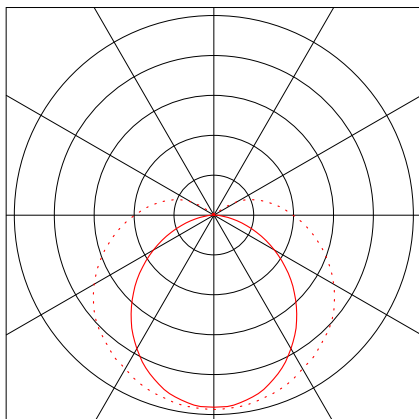


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Topline 6 LED Batten (ATLLED6)

1.1.2 LDC

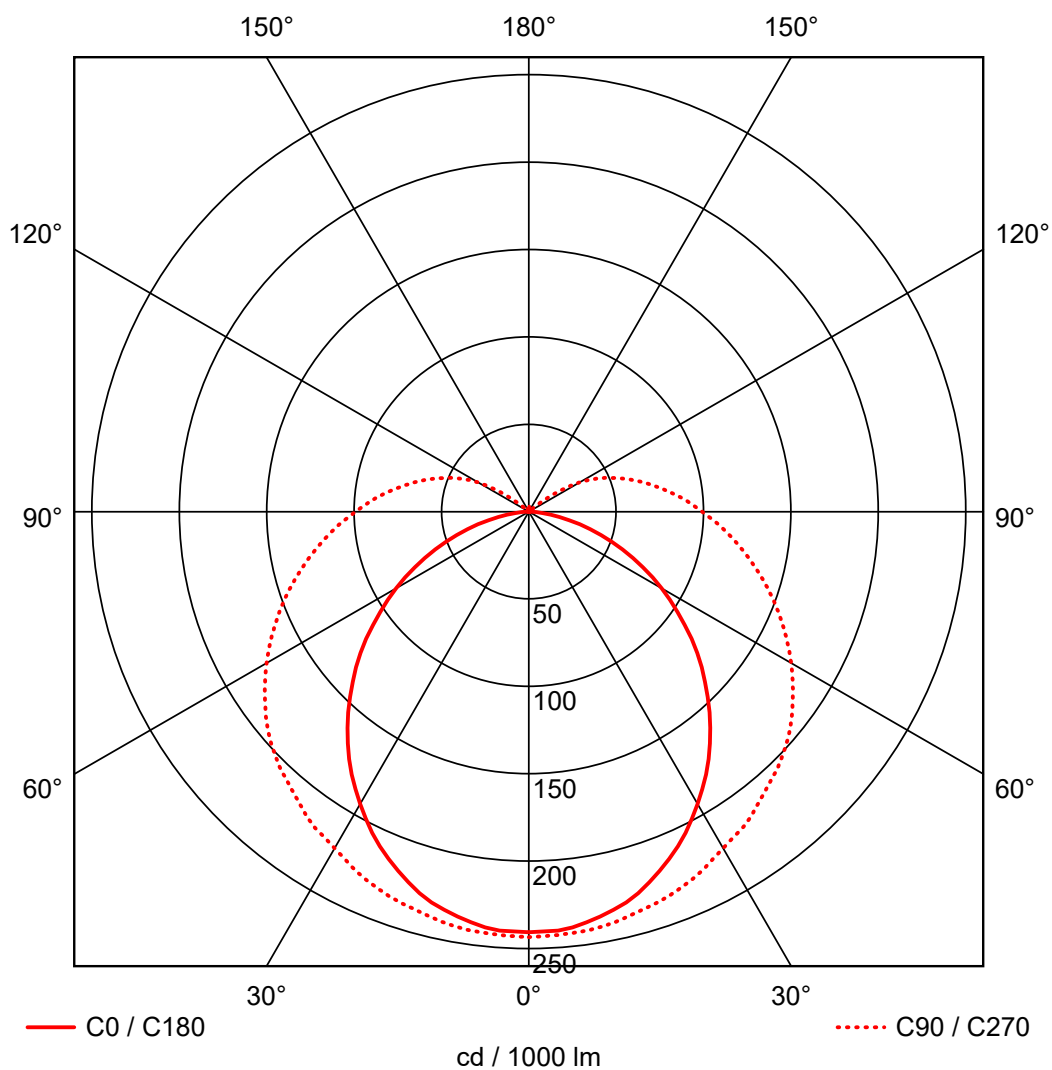

	C0	C90	C180
0°	241	243	241
10°	235	241	235
20°	219	234	219
30°	193	222	193
40°	162	210	162
50°	126	195	126
60°	88	173	88
70°	51	149	51
80°	18	124	18
90°	1	99	1
100°	0	77	0
110°	0	56	0
120°	0	34	0
130°	0	4	0
140°	1	1	1
150°	1	1	1
160°	1	2	1
170°	2	2	2
180°	2	3	2
cd / 1000 lm			

Manufacturer : ANSELL Lighting
Order number : ATLLED6
Luminaire name : Topline 6 LED Batten
Equipment : 1 x 4000K 41 W / 4372 lm
Dimensions : L 1635 mm x W 30 mm x H 30 mm
File name : rlx_20171221095053.ldt

Luminaire efficacy : 106.63 lm/W (B31)
Light distribution : sym. to C0-C180 / C90-C270
Beam Angle : 101.6° C0-C180
160.9° C90-C270