

Object :  
Installation :  
Project number :  
Date :



## 1 Luminaire data

### 1.1 Ansell Lightng, Tornado IP65 LED Non- Corrosive (ATORLED5)

#### 1.1.1 Data sheet

Manufacturer: Ansell Lightng

**ATORLED5**      **Tornado IP65 LED Non- Corrosive**


#### Luminaire data

Luminaire efficiency : 84.1%  
Luminaire efficacy : 115.37 lm/W  
Classification : A31 ↓93.2% ↑6.8%  
CIE Flux Codes : 43 72 91 93 84  
UGR 4H 8H : 21.0 / 20.2  
Power : 28 W  
Luminous flux : 3230.3 lm

#### Equipped with

Quantity : 1  
Designation : LED  
Colour :  
Luminous flux : 3841 lm

Dimensions : 1570 mm x 80 mm x 80 mm

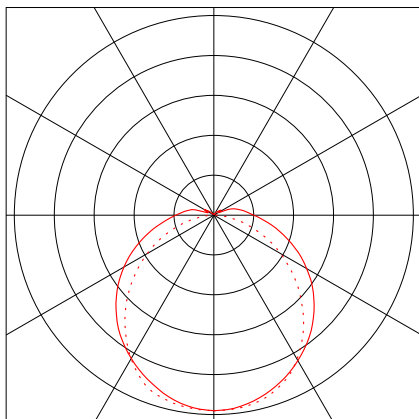


Object :  
 Installation :  
 Project number :  
 Date :



# 1.1 Ansell Lightng, Tornado IP65 LED Non- Corrosive (ATORLED5)

## 1.1.2 LDC

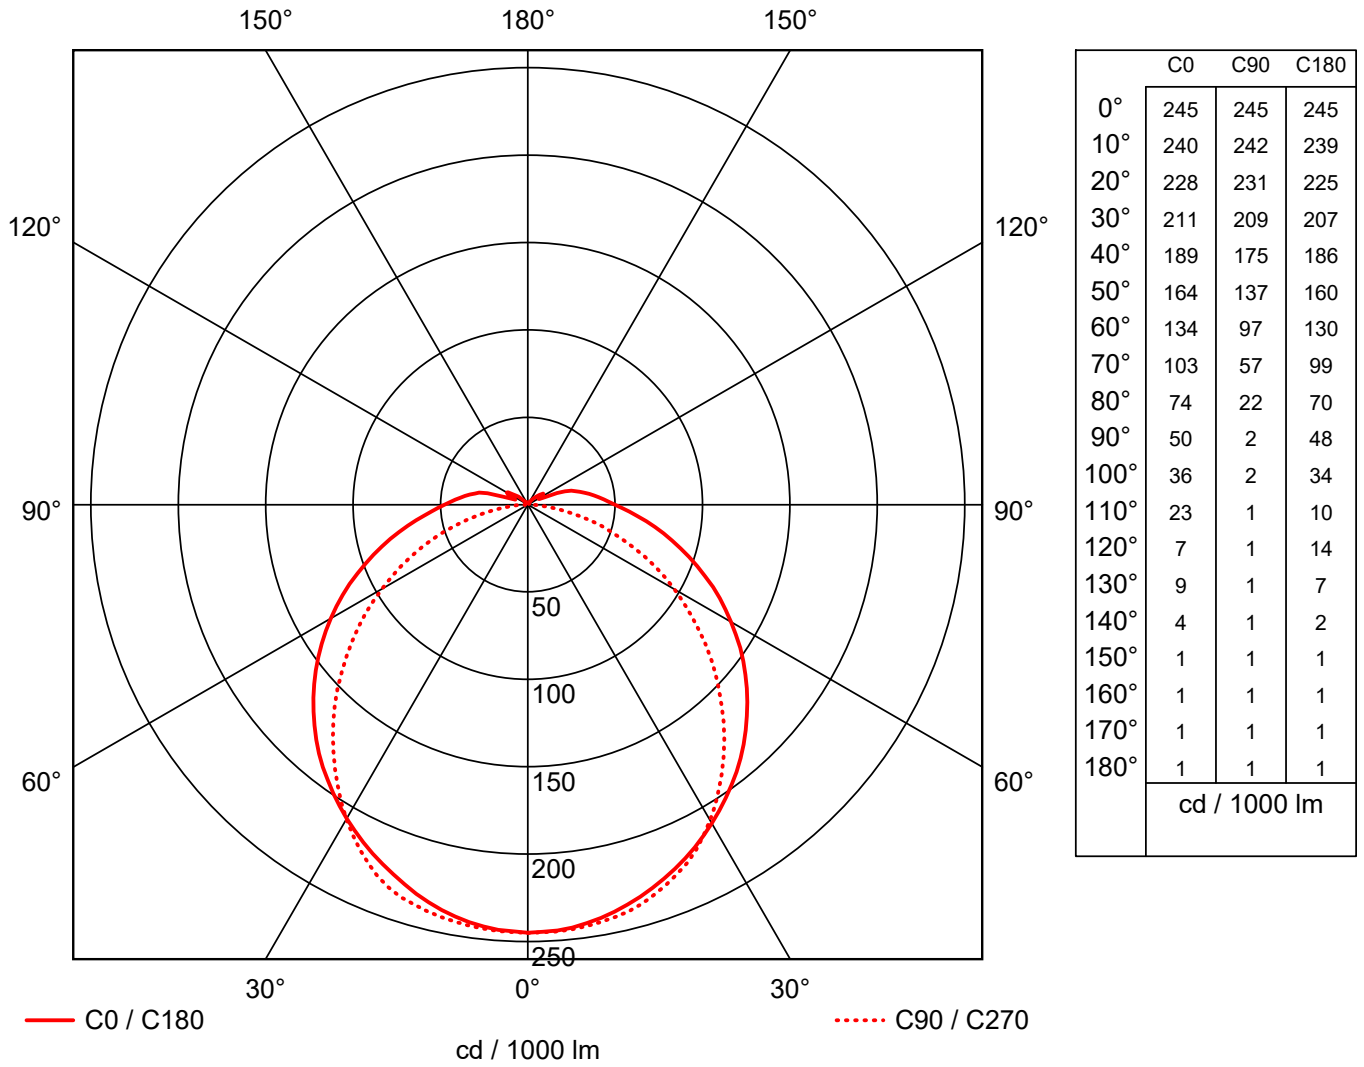

Manufacturer : Ansell Lightng  
 Order number : ATORLED5  
 Luminaire name : Tornado IP65 LED Non- Corrosive  
 Equipment : 1 x LED 28 W / 3841 lm  
 Dimensions : L 1570 mm x W 80 mm x H 80 mm  
 File name : rlx\_20170830123934.ldt

Efficiency factor : 84.1%  
 Luminaire efficacy : 115.37 lm/W (A31)  
 Light distribution  
 Beam Angle : 63.6° C0  
 53.3° C90  
 62.2° C180  
 53.2° C270