

Object :  
Installation :  
Project number :  
Date :



# 1 Luminaire data

## 1.1 ANSELL Lightign, Unity S and R Retractable LED... (AULED1/SMP)

### 1.1.1 Data sheet

Manufacturer: ANSELL Lightign

#### AULED1/SMP Unity S and R Retractable LED Downlight


##### Luminaire data

Luminaire efficiency : 66.5%  
Luminaire efficacy : 49.08 lm/W  
Classification : A70 ↓99.2% ↑0.8%  
CIE Flux Codes : 92 100 100 99 67  
UGR 4H 8H : 16.6 / 17.6  
Power : 15 W  
Luminous flux : 736.2 lm

##### Equipped with

Quantity : 1  
Designation : LED 4000K  
Colour :  
Luminous flux : 1107 lm

Dimensions : 48 mm x 48 mm x 58 mm

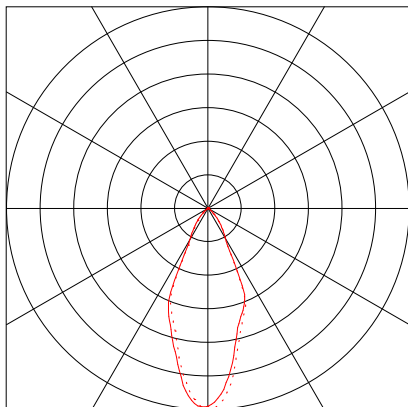


Object :  
 Installation :  
 Project number :  
 Date :



**1.1 ANSELL Lightign, Unity S and R Retractable LED... (AULED1/SMP)**

**1.1.2 LDC**

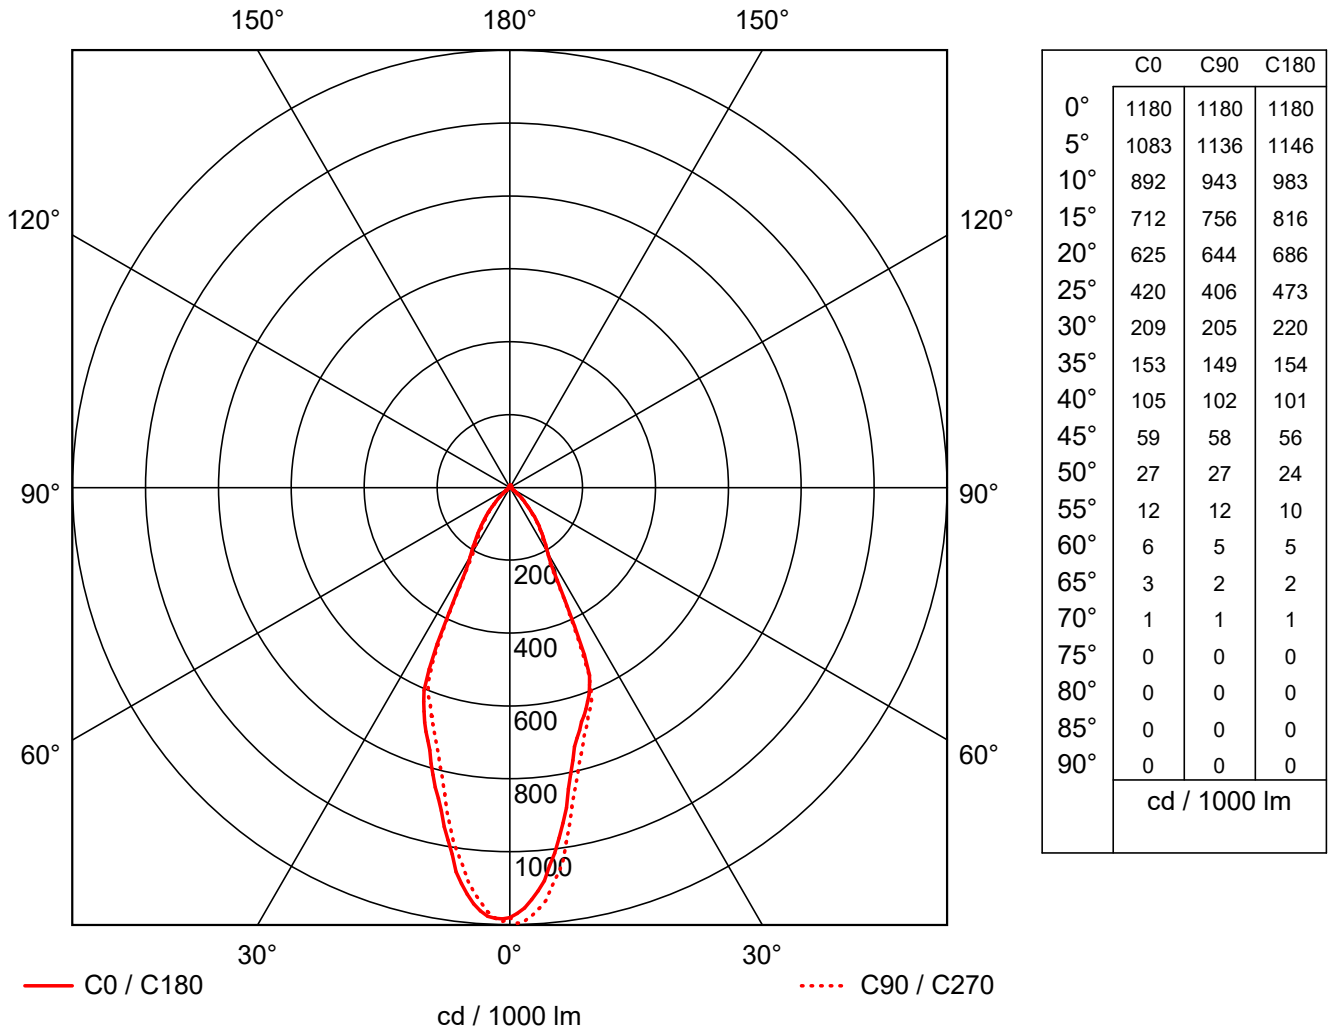

Manufacturer : ANSELL Lightign  
 Order number : AULED1/SMP  
 Luminaire name : Unity S and R Retractable LED Downlight  
 Equipment : 1 x LED 4000K 15 W / 1107 lm  
 Dimensions : L 48 mm x W 48 mm x H 58 mm  
 File name : rlx\_20170830203851.ldt

Efficiency factor : 66.5%  
 Luminaire efficacy : 49.08 lm/W (A70)  
 Light distribution  
 Beam Angle : 21.4° C0  
 21.9° C90  
 23.1° C180  
 22.1° C270