

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 Ansell, DISPLAY - Unity S and R Retra... (AULED2/RMP)

1.1.1 Data sheet

Manufacturer: Ansell

AULED2/RMP DISPLAY - Unity S and R Retractable LED Downlight


Luminaire data

Luminaire efficiency : 66.5%
Luminaire efficacy : 49.08 lm/W
Classification : A70 ↓99.2% ↑0.8%
CIE Flux Codes : 92 100 100 99 67
UGR 4H 8H : 13.7 / 13.4
Power : 15 W
Luminous flux : 736.2 lm

Equipped with

Quantity : 1
Designation : 1107 lm, 15 W
Colour :
Luminous flux : 1107 lm

Dimensions : 150 mm x 70 mm x 1 mm

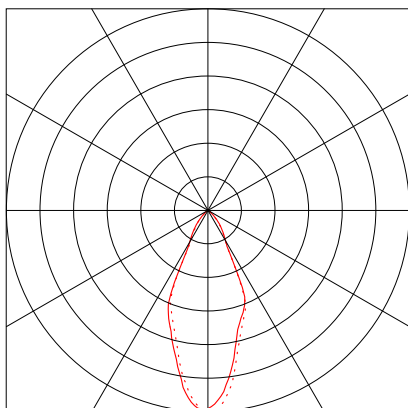


Object :
 Installation :
 Project number :
 Date :



1.1 Ansell, DISPLAY - Unity S and R Retra... (AULED2/RMP)

1.1.2 LDC

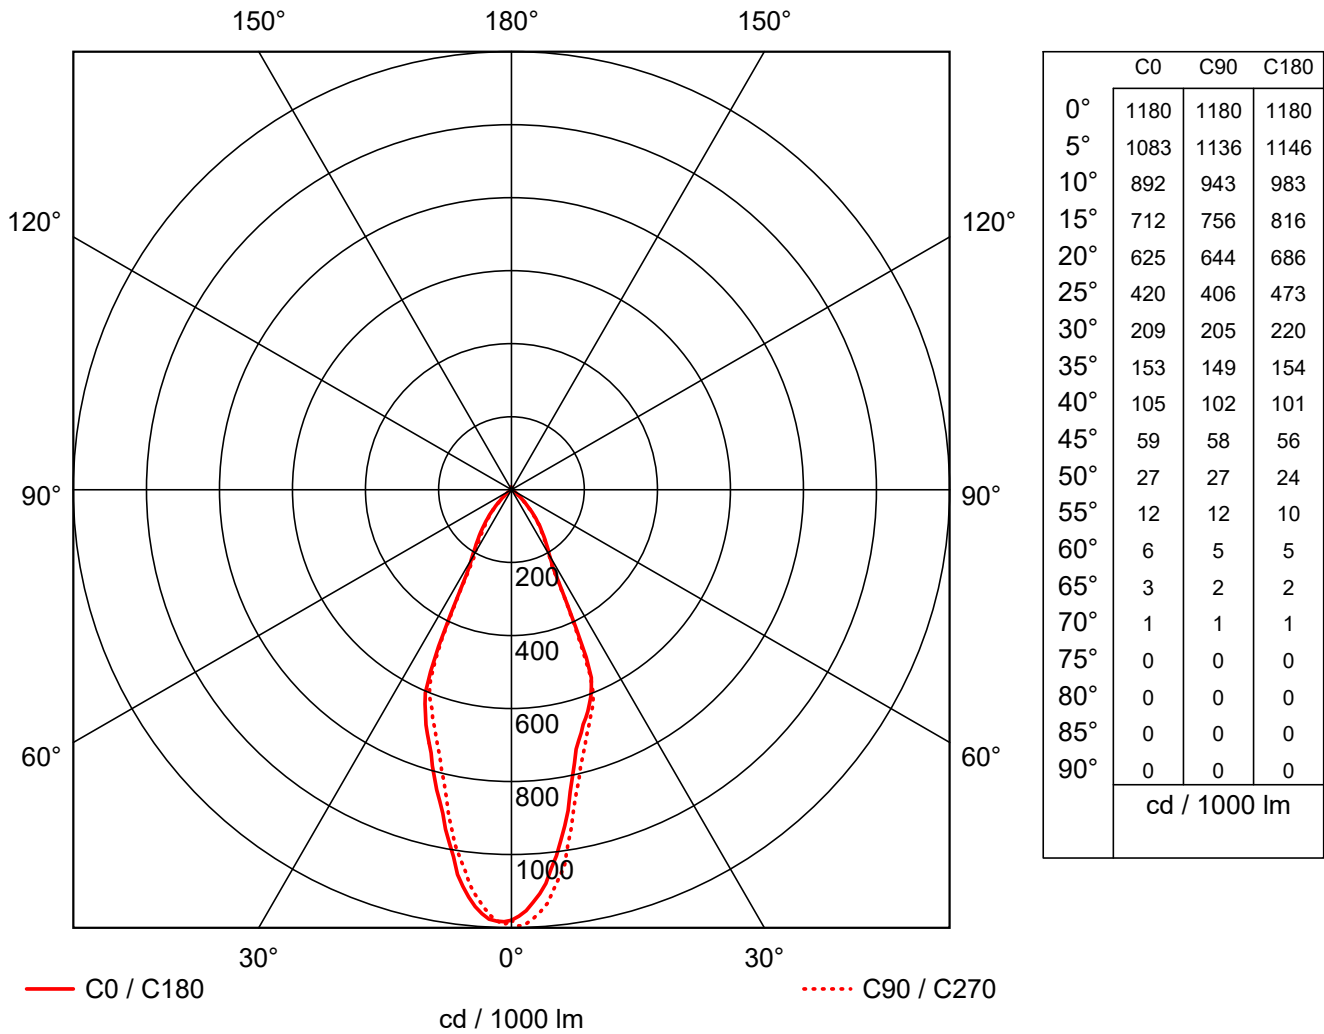

Manufacturer	: Ansell	Efficiency factor	: 66.5%
Order number	: AULED2/RMP	Luminaire efficacy	: 49.08 lm/W (A70)
Luminaire name	: DISPLAY - Unity S and R Retractable LED Downlight	Light distribution	
Equipment	: 1 x 1107 lm, 15 W 15 W / 1107 lm	Beam Angle	: 21.4° C0 21.9° C90
Dimensions	: L 150 mm x W 70 mm x H 1 mm		23.1° C180
File name	: rlx_20180910101338.ltd		22.1° C270