

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Unity Rectangular LED Wallwash (AULEDRECWW)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AULEDRECWW Unity Rectangular LED Wallwash


Luminaire data

Luminaire efficiency : 100.1%
Luminaire efficacy : 85.14 lm/W
Classification : A50 ↓100.0% ↑0.0%
CIE Flux Codes : 57 92 100 100 100
UGR 4H 8H : 21.8 / 27.0
Power : 36 W
Luminous flux : 3065.1 lm

Equipped with

Quantity : 1
Designation : LED
Colour :
Luminous flux : 3062 lm


Dimensions : 235 mm x 145 mm x 5 mm

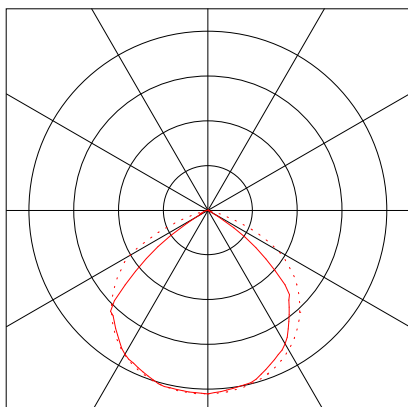



1.1 ANSELL Lighting, Unity Rectangular LED Wallwash (AULEDRECWW)

1.1.2 LDC

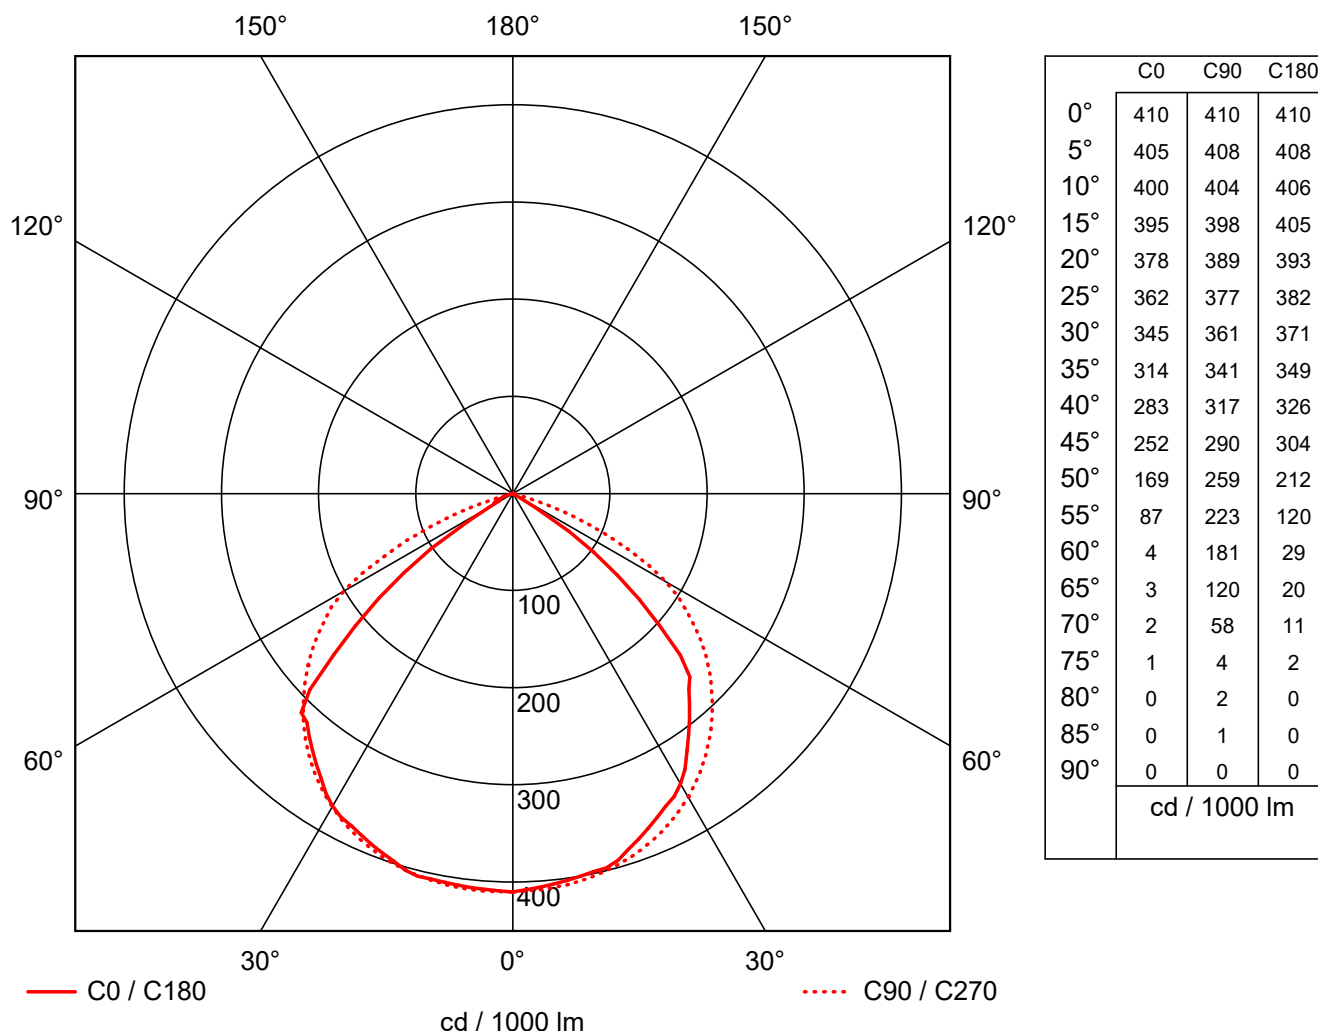

Manufacturer : ANSELL Lighting
Order number : AULEDRECWW
Luminaire name : Unity Rectangular LED Wallwash
Equipment : 1 x LED 36 W / 3062 lm
Dimensions : L 235 mm x W 145 mm x H 5 mm
File name : rlx_20170830212347.ltd

Efficiency factor : 100.1%
Luminaire efficacy : 85.14 lm/W (A50)
Light distribution
Beam Angle : 47.8° C0
57.1° C90
50.4° C180
59.5° C270