

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 ANSELL Lighting, Uno LED (AUNLED)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AUNLED Uno LED


Luminaire data

Luminaire efficiency : 100%
Luminaire efficacy : 36.82 lm/W
Classification : A31 ↓93.4% ↑6.6%
CIE Flux Codes : 41 69 88 93 100
UGR 4H 8H : 19.5 / 12.2
Power : 12 W
Luminous flux : 441.8 lm

Dimensions : Ø270 mm x 120 mm

Equipped with


Quantity : 1
Designation : 12W OSRAM
Preva-23
Colour : 0
Luminous flux : 441.8 lm
Colour reproduction : 0

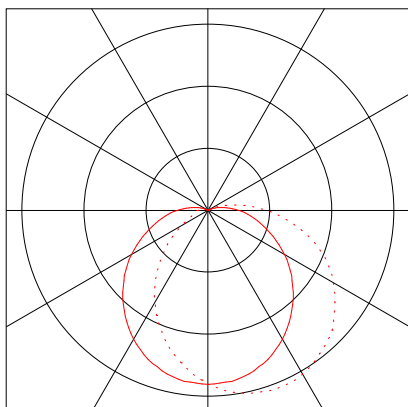

Object :
 Installation :
 Project number :
 Date :

1.1 ANSELL Lighting, Uno LED (AUNLED)

1.1.2 LDC

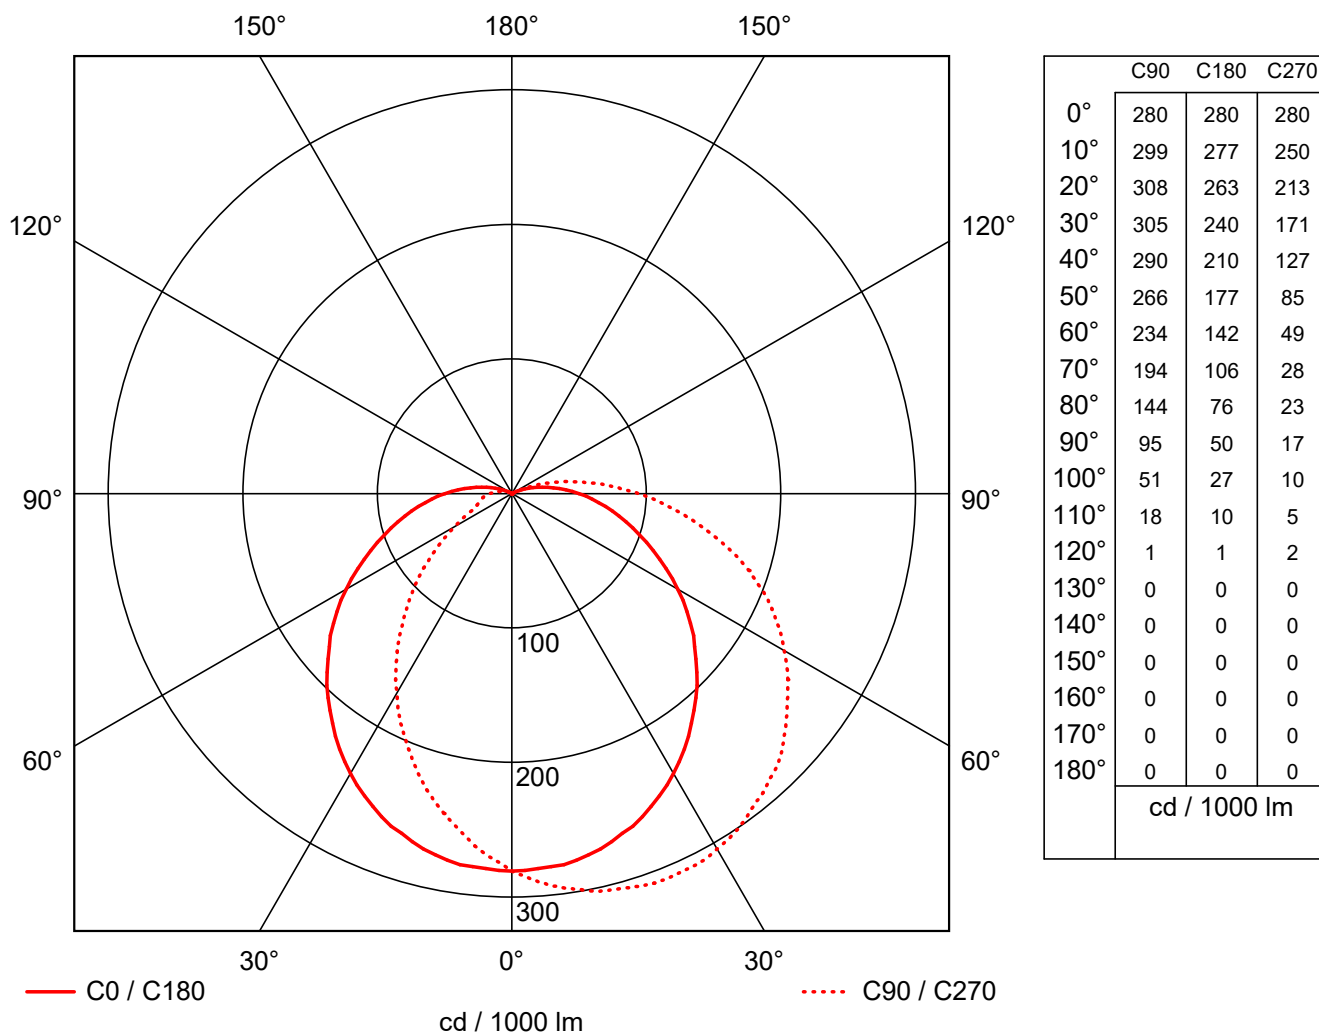

Manufacturer : ANSELL Lighting
 Order number : AUNLED
 Luminaire name : Uno LED
 Equipment : 1 x 12W OSRAM Preva-23 12 W / 44
 Dimensions : D 270 mm x H 120 mm
 File name : AUNLED.LDT

Efficiency factor : 100%
 Luminaire efficacy : 36.82 lm/W (A31)
 Light distribution : sym. to C90-C270
 Beam Angle : 113.7° C0-C180
 78.0° C90
 34.0° C270