



Arteor™ 10 AX switches with indicator


Cat. No(s).: 572 006/036/037/450/506/536/537
573 016/017/018/062/116/117/118/162



572 006/506



572 036/536











573 062/162

1. USE

General lighting control mechanisms with signalling elements (indicator light or label holder, color).

2. RANGE


	Designation	Finishes.			Number of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium	Red				
	Two-way switch with indicator (square)	572 006	572 506	-	1	with screws	24.4	10 AX - 250 VAC
	Two-way switch with indicator (square)	572 036	572 536	-	2	with screws	32.1	10 AX - 250 VAC
	Two-way switch with indicator and label holder (square)	572 037	572 537	-	2	with screws	31.5	10 AX - 250 VAC
	Two-way switch with red rocker (square)	-	-	572 450	1	with screws	21	10 AX - 250 VAC
	Two-way switch with indicator (round left)	573 016	573 116	-	1	with screws	24	10 AX - 250 VAC
	Two-way switch with indicator (round middle)	573 017	573 117	-	1	with screws	23.6	10 AX - 250 VAC
	Two-way switch with indicator (round right)	573 018	573 118	-	1	with screws	24	10 AX - 250 VAC
	Two-way switch with indicator (round)	573 062	573 162	-	2	with screws	31.5	10 AX - 250 VAC

Arteor™ 10 AX switches with indicator


Cat. No(s).: 572 006/036/037/450/506/536/537
573 016/017/018/062/116/117/118/162

3. PREPARATION

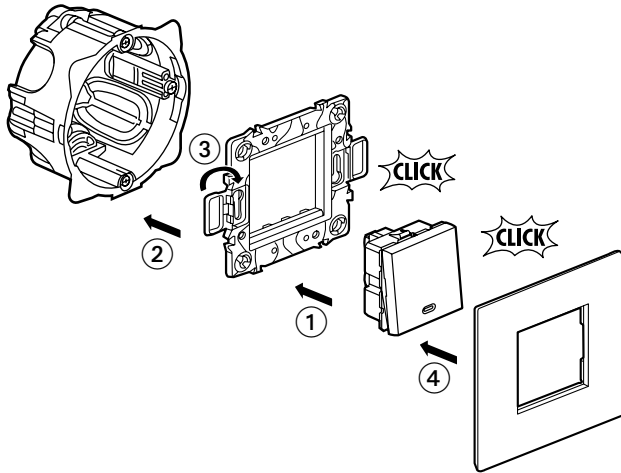The mechanisms can be flush-mounted or surface-mounted.




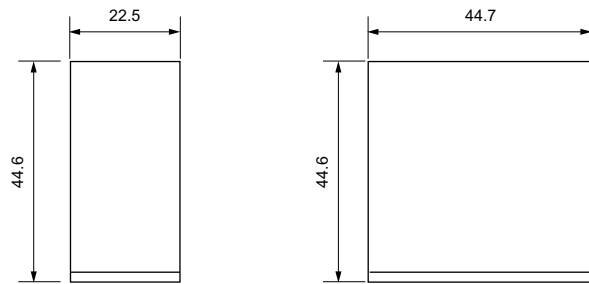4. OVERALL DIMENSIONS



572 006/450/506
573 016/017/018/116/117/118

572 036/037/536/537
573 062/162



5. CONNECTION

Terminal: with screws
Capacity: 2 x 2.5 mm² or 1 x 4 mm²
Stripping: 10 mm
Screwdriver: 4 mm flat-blade up to 5.5 mm

6. OPERATION

Switch mechanism with locator and/or label holder.

7. TECHNICAL CHARACTERISTICS

7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies/liquids: IP 40 (mounted)
IP 20 (alone)

7.2 Material characteristics

Rocker: Polycarbonate
Base: Polycarbonate
Basket: Polypropylene

7.3 Electrical characteristics

Voltage: 250 VAC
Current: 10 AX
Consumption of the indicator light: 0.95 mA
Self-extinguishing: 650°C / 30 s

7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.
Resistance to the following cleaning agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

9. CONFORMITY AND APPROVALS

Approvals in process:

	IECEE	SABS	PAI	PSB	SONCAP	KEN
572 006 / 572 506	x	x	x		x	x
572 036 / 572 536	x	x		x		
572 037 / 572 537	x	x	x			
572 450	x		x	x		
573 016 / 573 116	x	x	x		x	x
573 017 / 573 117	x	x	x		x	x
573 018 / 573 118	x	x	x		x	x
573 062 / 573 162	x	x		x		