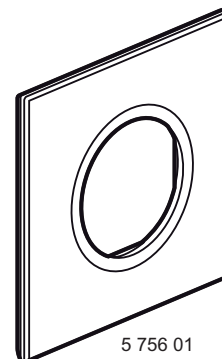
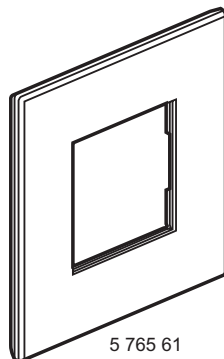
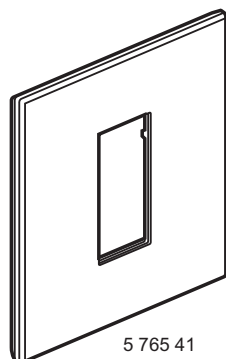


Arteor™
Pearl alu plates
for franco-belgian and german standard








**Cat. No(s): 5 750 21/31/41/51/61 - 5 755 11/21 - 5 756 01
5 765 41/61**



1. USE

Plates for covering mechanisms.




2. RANGE

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	1 module plate square	5 765 41	1	with clips	23.6
	2 modules plate square	5 765 61	2	with clips	22
	2 modules plate round	5 756 01	2	with clips	27.9
	2 x 2 modules plate square	5 750 21	4	with clips	33.5
	2 x 2 modules plate round	5 755 11	4	with clips	36.8
	4 modules plate square	5 750 31	4	with clips	33.7
	3 x 2 modules plate square	5 750 51	3 x 2	with clips	50

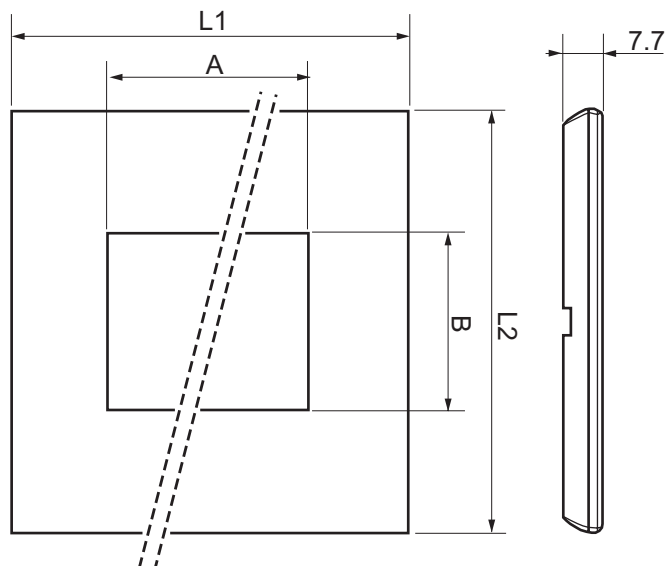
Arteor™
Pearl alu plates
for franco-belgian and german standard

Cat. No(s).: 5 750 21/31/41/51/61 - 5 755 11/21 - 5 756 01
 5 765 41/61

2. RANGE (continued)

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	3 x 2 modules plate round	5 755 21	3 x 2	with clips	90
	6 modules plate square	5 750 41	6	with clips	50.3
	2 x 6 modules plate square horizontal mounting	5 750 61	2 x 6	with clips	96

3. OVERALL DIMENSIONS



Cat. No.	L1	L2	A	B
5 750 21	157	92	2 x 45.4	2 x 45.4
5 750 31			90.6	45.4
5 750 41	135.8			
5 750 51	237.5	178	3 x 45.4	3 x 45.4
5 750 61			2 x 135.8	2 x 45.4
5 755 11	157	92	2 x Ø 45.4	
5 755 21	237.5		3 x Ø 45.4	
5 756 01	92		Ø 45.4	
5 765 41		45.4	22.5	45.4
5 765 61			45.4	

4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver. No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box. Protection film must be removed only once site work is fully completed.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 04

5.2 Material characteristics

Front plate: polycarbonate
 Under plate: polycarbonate

5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
 Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactily sine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Arteor plates must not be painted.