



Synergy™ Socket outlets 13 A - Authentic

Cat. No(s): 8 330 65/75 - 8 332 65/75 - 8 334 65/75



8 33x 65

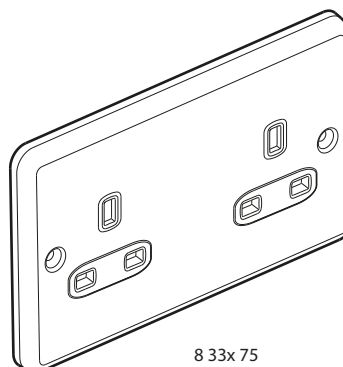

8 33x 75

1. USE

British standard socket outlets, complete delivered, with compact mechanisms for maximum wiring space and slim front plates.
 For flush-mounting, back box to be min. 35 mm deep.
 Fixing with screws.

2. RANGE


One-gang socket outlet with safety shutters

8 330 65	● Brushed stainless steel
8 332 65	● Polished stainless steel
8 334 65	● Glossy gold

Two-gang socket outlet with safety shutters

8 330 75	● Brushed stainless steel
8 332 75	● Polished stainless steel
8 334 75	● Glossy gold

3. OVERALL DIMENSIONS (mm)

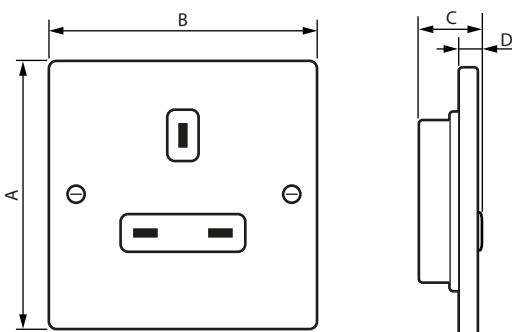

Cat. Nos	A	B	C	D
8 33x 65	86	86	26	7
8 33x 75	86	146	26	7

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 3 x 2.5 mm² - 2 x 4 mm² - 2 x 6 mm²
 Stripping length: 12 mm
 Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 01
 Penetration by solid bodies/liquids: IP 20

■ 5.2 Material characteristics

Rocker and plate:
 - BSS: austenitic Brushed Stainless Steel - non magnetic - grade 304 L
 - PSS: Polished Stainless Steel + rust resistance
 - GG: Stainless Steel + rust resistance
 Mechanism housing: PC
 Halogen free
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 13 A
 Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.