



Synergy™
Front plates for Arteor mechanisms
Metalclad


Cat. No(s): 7 338 91/92/93/94



7 338 91

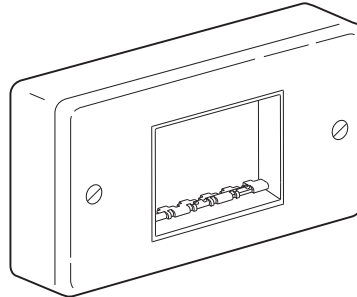

7 338 93

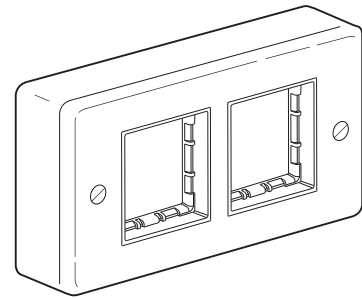

7 338 94


1. USE

Front plates for Arteor mechanisms.
 Supplied with back box, for surface-mounting.
 Fixing with screws.

2. RANGE

1-gang for 1 Arteor module	7 338 91
1-gang for 2 Arteor modules	7 338 92
2-gang for 3 Arteor modules	7 338 93
2-gang for 4 Arteor modules	7 338 94

3. OVERALL DIMENSIONS (mm)

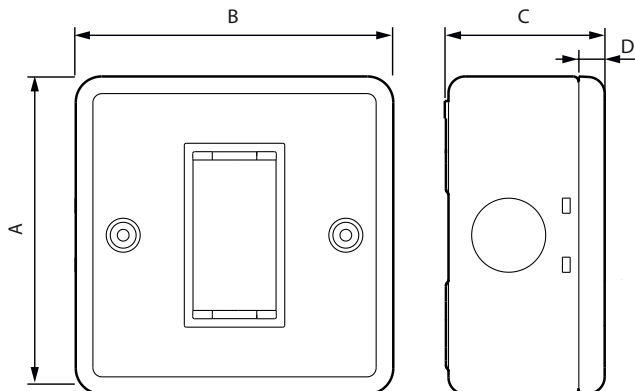

Cat. Nos	A	B	C	D
7 338 91/92	86	86	43	7
7 338 93/94	86	146	43	7

4. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 08
 Assembled with Arteor mechanisms, penetration by solid bodies/
 liquids: IP 20

■ **5.2 Material characteristics**

Front plate and surface mounting back box: Grey epoxy coated steel
 Support frame : PC - Color: White

Halogen free

UV resistant

Self-extinguishing: 850° C / 30 s

■ **5.4 Climatic characteristics**

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

5. CLEANING

Clean the surface with a cloth or soapy water.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special
 maintenance products.

6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.