


Characteristics


Voltage			Audible signal
230 V 50 - 60 Hz	2 x 2.5 mm ²	- 5° C + 40° C	230 V / 33 mA 72 dB

Description

Call indicator

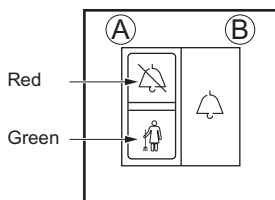


Call control

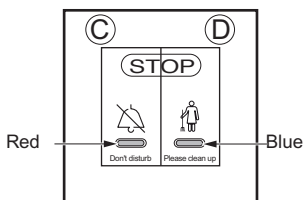


Option




Buzzer



Wiring

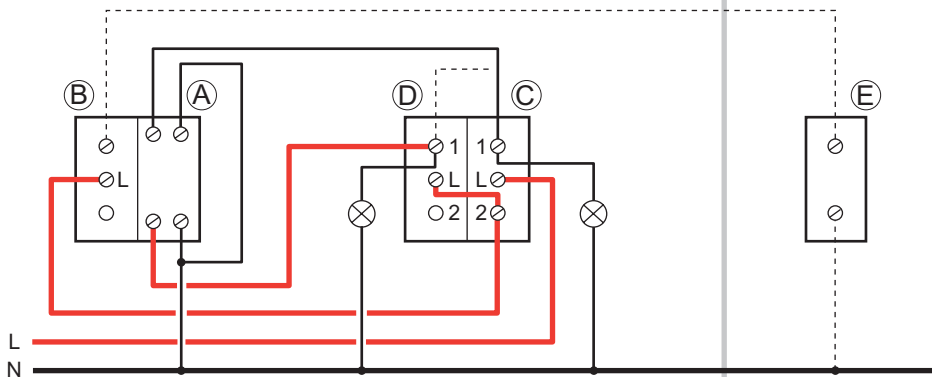



Assembly

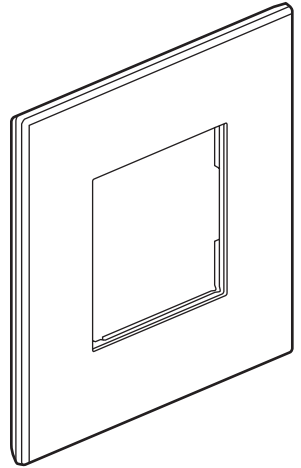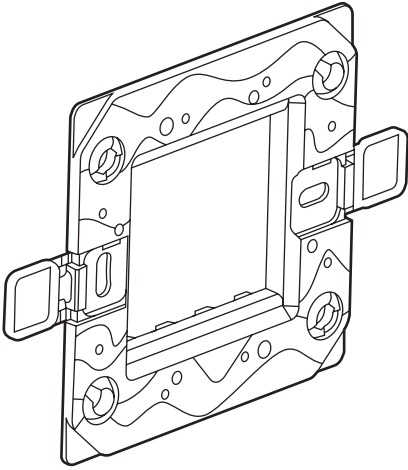


Operation

1- Instruction : «Do not disturb»




Bedroom

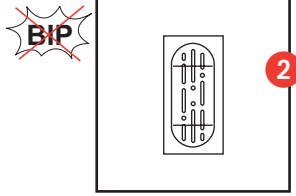



Corridor



2- Instruction : «Please clean up»





3- No call



Note

If both buttons are pressed simultaneously, priority is given to the «don't disturb» call

Bedroom



Corridor

