

Lighting Control Catalogue

LON based Lighting Control System

Issue: February 2010



Make the most of your energy

Schneider
Electric

More than just Lighting Control

Lighting Control Solutions, delivered as part of an integrated building management system from Schneider Electric, are a key tool in controlling energy use inside your buildings.

A lighting control system allows for flexibility in the utilisation of internal space. Regular and rapid changes in the use of buildings, and increasing expectations regarding comfort and performance, mean that lighting installations must be able to evolve to meet the requirements of an expanding business, or be easily adapted to suit new tenants.

Lighting Solutions from Schneider Electric and its partners meet the needs of building users and owners by:

reducing installation and operating costs

providing greater flexibility in the use of building space

helping building owners meet legal and building performance regulations.


Global Leader in Building IT

As a global specialist in energy management with operations in more than 100 countries, Schneider Electric offers integrated solutions across multiple market segments, including leadership positions in energy and infrastructure, industrial processes, building automation, and data centres/networks, as well as a broad presence in residential applications. Focused on making energy safe, reliable, and efficient, the company's 114,000 employees achieved sales of more than 18.3 billion euros in 2008, through an active commitment to help individuals and organisations "Make the most of their energy™".

www.schneider-electric.com/buildings

Table of Contents

More than just Lighting Control	2	DALI power Supply REG-N 140	26
www.schneider-electric.com/buildings	2	DALI Multi-Sensors	27
Lighting Control Solutions	5	DALI Multi-Sensor LA-11	27
Automating energy efficiency	6	Occupancy/Motion Detectors	27
Design Programme	8	LON ARTEC Motion Detector	27
Room Control Unit	9	LON System-M Motion Detector	27
LON I/O Modules	10	LON System-M Motion Detector 2.2m	28
DALI Controller	12	Multi-Sensor LA-21	28
DALI Gateway	13	Multi-Sensor ILA-22	28
Multisensors	14	Surface Mounting Box for Multi-Sensor LA-21/ILA-22	29
Temperature Control	15	IR Remote Control	29
Lighting Control Products	16	Temperature Controllers	29
System Components	16	LON ARTEC Temperature Controller RTR-51	29
Power Supply LPS 133	16	LON System-M Temperature Controller RTR-51	29
LON Power Supply LPS-W	16	Dimmer Output	30
Power Supply ABL8MEM24012	16	I/O Module DR-N DIM 500-UNI	30
Bus Coupling Unit UP	16	I/O Module DR-N 3DIM 1-10V	30
Panels	17	I/O Module DR-M DIM 400-RC	31
LON ARTEC Push button 1-gang	17	I/O Module DR-M DIM 500-RL	31
LON ARTEC Push button 2-gang	17	Digital Inputs	31
LON ARTEC Push button 4-gang	17	I/O Module DR-M 4DI	31
LON ARTEC Room Control Unit RCU-61	18	LON I/O Module REG-M 4DI AC/DC	32
LON ARTEC Room Control Unit RCU-101	18	LON I/O Module REG-M 8DI AC/DC	32
Frame ARTEC 1-gang	18	LON I/O Module REG-M 8DI DC-P	32
Frame ARTEC for RCU-101	19	LON I/O Module REG-M 8DI 230V	32
LON System-M Push button 1-gang	19	Combined In-/Outputs	33
LON System-M Push button 2-gang	19	LON I/O Module REG-N 8DI 8DO AC	33
LON System-M Push button 4-gang	19	LON I/O Module REG-S 4W 4DI 24V	33
LON System-M Push button MF 4-gang	20	LON I/O Module UP 6DI 2DO	33
LON System-M Push button MF-IR 4-gang	20	Physical Sensors	34
LON System-M Room Control Unit RCU-61	20	LON Multi-Sensor LT-23 AP	34
LON System-M Room Control Unit RCU-101	21	LON Indoor Temperature Sensor AP RTS-10	34
Frame M-PLAN 1-gang	21	LON Valve Actuator SA-22	34
Frame M-PLAN for RCU-101	21	LON Sensor Unit SE-843	34
Frame M-PLAN Glass 1-gang	21	Outdoor Temperature Sensor MWG-AT	35
Digital output	22	Brightness Sensor MWG-H	35
I/O Module DR-N 8S 10A	22	Rainfall Gauge MWG-N	35
LON I/O Module DR-M 8S 10A	22	Wind Sensor MWG-W	35
LON I/O Module DR-M 8S 16A	23	Power Supply AP 1024 AC	36
LON I/O Module DR-M 12S 16A	23		
Sunblind	24		
I/O MODULE DR-N MSCU4-AC	24		
LON I/O Module REG-S MSE4 8DI 24V	24		
LON I/O Module REG-S MSE2 4DI 24V	24		
LON I/O Module REG-M MSE4	24		
DALI Controller	25		
LON DALI-Controller REG-S 4DIM	25		
DALI-Controller DR-S 8DIM	25		
LON DALI-Controller REG-S 16DIM	26		
LON DALI Gateway REG 4x16 DIM	26		

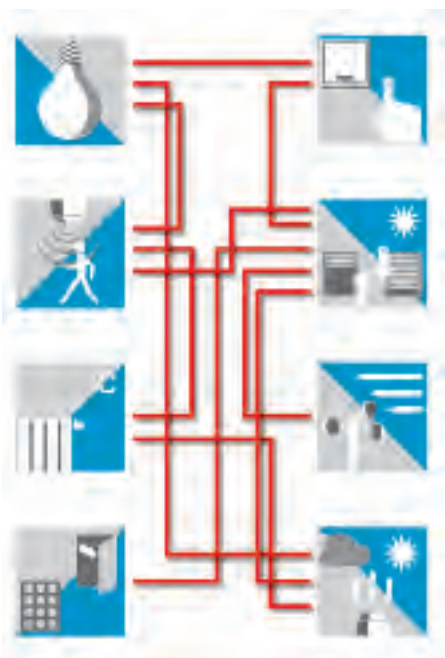

Buildings evolve and are transformed over decades. They need flexible systems that are designed to adapt to changing technologies and user demands. That is why the choice of a communications bus system such as LON is of such long-term importance.

LON-based building management systems provide tremendous advantages to everyone involved:

Architects:

- The technical demands on building systems can be satisfied in a simpler, more flexible and cost-effective way.
- Control and display devices with bus capability combine all the functions of the different installation systems and at the same time provide a visually appealing design.

Builders and Operators:

- A cost-effective installation
- A high degree of flexibility, and financial savings, when the installation needs to be retrofitted or modified
- Reduction of operating costs by intelligent facility management
- "Transparency" of buildings by centralised annunciation, control and monitoring
- Standardised and easily comprehensible operation of the facilities
- Reduction of maintenance and service costs

Planners and Installers:

- Prevention of installation and planning mistakes thanks to an easy and comprehensible installation procedure
- Lower installation costs, in comparison to isolated solutions
- Facilitates compliance with regulations by reducing the risk of fire
- Reduced production costs due to the multiple use of sensors and the elimination of expensive gateway solutions for data exchange between individual systems
- Reduced training costs

Lighting Control Solutions

APPLICATIONS

The use of an intelligent building system is particularly recommended for buildings which require an optimised installation in terms of maximum flexibility and comfort, combined with minimum additional cabling, e. g.

in banks and building societies, office and administration buildings, hospitals, hotels, department stores, industrial warehouses, schools etc.

Light and sunblind control is an important part of the system as it represents a major part of the potential energy savings.

LIGHT CONTROL

Lighting units may be controlled both centrally and locally. The light can be dimmed or switched at predetermined times. In addition, it can be made dependent on indoor or outdoor brightness levels and whether the building – or a given area of the building – is currently occupied or not, so that the presence or absence of building users so that energy and operating costs are reduced.

Scene control provides the opportunity to store brightness levels, and of retrieving the settings via push buttons or an IR remote control as often as required, making it possible to operate any lighting scene within seconds.

SUNBLIND CONTROL

Sunblinds can similarly be controlled both centrally and locally. Wind, rainfall and temperature sensors detect the weather conditions, and drive the outdoor venetian blinds automatically into a safe position if required. Via scene control, the sunblinds can adopt a preset position with one key press. The automatic panel adjustment function calculates the current sun position depending on date, time and location of the building, and adjusts the panels in such a way that optimum transparency and antiglare protection are provided at any time. In addition, sunblind control can be combined with HVAC control. According to the incident solar radiation and the particular room temperature, the blinds are lowered to avoid overheating.



Automating energy efficiency



There are different possibilities to equip buildings so that they can be run in an energy-saving manner. Building automation, and especially room automation, offers high energy saving potential.

FUNCTIONS FOR SAVING LIGHTING ENERGY

The functions for saving lighting energy avoid unnecessary use of artificial lighting and thus save electricity. They are based mainly on the room conditions "level of light in room" and "presence".

CONSTANT LIGHT CONTROL

Multi-function sensors determine the brightness of the room and whether it is occupied. They transmit their data to dimmer actuators. If the room is not being used, the lighting stays off. If the room is being used, the dimmer actuators adjust the lighting to a precisely defined level of brightness. The energy savings are especially high if the room is well supplied with daylight, or if its use requires a high level of lighting. The savings potential is between 35 and 50 percent.

BRIGHTNESS-DEPENDENT LIGHTING CONTROL

This function basically corresponds to constant light control. Since switchable light actuators are used instead of dimmer actuators, the lighting level cannot be exactly set to the minimum level. For that reason, the energy savings potential is about 10 percent less than for constant light control, and is no higher than 45 percent.

PRESENCE-DEPENDENT LIGHTING CONTROL

This function is used to save lighting energy in areas with insufficient daylight. The saving effect is achieved having the lighting controlled by presence/ movement detectors, which only turn on the lighting when the room is occupied. The saving potential depends, therefore, primarily on the level of use.

SUNBLIND CONTROLLED BY THE POSITION OF THE SUN (SUN AUTOMATIC SYSTEM)

Controlling the sunblind according to the position of the sun (also known as the sun automatic system) ensures that the sunblind automatically moves to a defined shield position when strong solar radiation is present. As soon as the intensity of the sunshine lessens, it is moved back. The savings are attributable particularly to the fact that automatic control is more effective than manual control. This reduces the need for artificial light. The savings potential is between 5 and 8 percent.

SLAT TRACKING

The "slat tracking" function ensures that the sunblind slats automatically adjust to the position of the sun. In this way, the diffuse daylight that shines through the blinds can be used. At the same time, the proportion of artificial light can be reduced, the "slat tracking" function makes lighting energy savings of 10 to 13 percent possible.

INTERACTION BETWEEN SLAT TRACKING AND CONSTANT LIGHT CONTROL

An integrated system permits functions such as slat tracking and constant light control to be used together and in coordination. This combination is especially advisable in rooms with a good supply of daylight. The savings here can be up to 30 percent.

INTEGRATED ROOM AUTOMATION SYSTEM

A precondition for the optimal effectiveness of all functions is an integrated room automation system, in which the different systems such as heating, cooling or glare shield work in unison. In an integrated room automation system, the sensors provide the information for all the systems, while actuators and the lighting, heating, and cooling systems, provide simultaneous support.

PLANNING AND CONFIGURATION OF AN ENERGY SAVING ROOM AUTOMATION SYSTEM

The planning and configuration of an energy saving room automation system is simplified by the fact that the room automation system functions conform to the Lonmark profiles used around the world. With this system, room automation functions can be described clearly and comprehensively.


Once the desired room automation functions have been selected, the savings potential of the particular room automation solution can be determined, and the chosen solution can be configured with devices.



Functions for saving lighting energy

Room Automation Functions	Savings	Positive factors
Constant light control (presence-dependent, dimmed)	35 - 50%	- good daylight supply - high lighting levels (>300lux) - particularly efficient with slat control
Presence and brightness-dependent lighting control (switched)	25 - 45%	- good daylight supply - high lighting levels
Automatic sun protection system	5 - 8%	- good daylight supply
Slat adjustment	10 - 13%	- good daylight supply - particularly efficient with constant light control
Automatic lighting or staircase lighting	No information	- low presence levels (e.g. corridors)

Design Programme

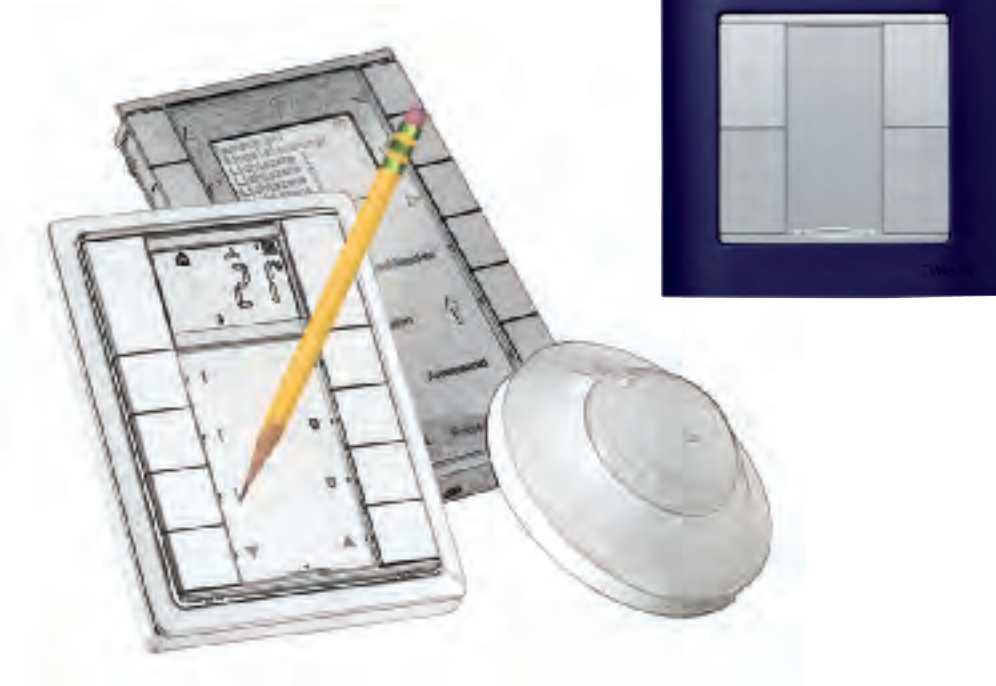

Open building control systems provide synergy effects between the individual systems. The functions of various individual installation systems are combined in one device. Previous light switches, thermostats and sunblind controls of different sizes, designs and colours are replaced by a single control and display device, by means of which all the room functions mentioned can be controlled.

LON-interfaced Control Panels combine the performance capability of LON a timeless, unobtrusive design. Clearly arranged keys, lettering areas and displays, allow the user to control the lighting, venetian blinds, heating, ventilation and other devices in the room effortlessly.

We offer a range of aesthetically appealing products including System-M.

System-M comprises ten modules – from a 1-gang push button to occupancy detector. Each is available in five colours. These modules can be combined with 27 different frames.

The ARTEC Program is timeless in design, with a clean, flush-fitting profile. It satisfies the demands of modern architecture, and is suitable for many different locations. Its premium stainless steel design provides the ideal surface for subtle but highly visible lettering.

Room Control Unit

Room Control Units RCU-61 and RCU-101 are a combination of a temperature controller and a multi-function push button with display. The RCU-61 includes six, and the RCU-101 ten, large push buttons; either can be adapted to different individual functions.

Two push buttons each are reserved for temperature control.

The Room Control Units can control any operating resource installed in a room, either individually or in scenes, by a single device:

- Lighting and sunblinds
- Heating, air conditioning and ventilation

In addition, Room Control Unit RCU-101 can be activated by a remote control device which is available separately

All design modules consist of application modules, frame and LON BUS Coupling Unit. (the "LON-BCU®").

The LON-BCU is available individually for the use of EIB-application modules in LON networks such as

- Push Buttons
- Temperature Controllers
- Motion detectors

from the product ranges of manufacturers such as Berker, Feller, Gira, Jung, Merten and Siemens.

Besides a broad variety of application modules, our third generation of LON Bus Coupling Units features low power consumption. It utilises link power technology, taking the power needed to operate from the LON network. No additional power supply is required.

As with the standard modules, configuration is made with an LNS plug-in. All applications comply with the relevant LonMark standards.



LON I/O Modules



Lighting Control Solutions cover a wide range of functions, including

- Digital Inputs for 24 V and 230 V input voltage, and for floating contacts
- Analog inputs and outputs
- Switching actuators with 24 V semiconductor outputs
- Switching actuators with relay outputs
- Phase controlled dimmers 1-10 V control devices for dimmable electronic ballasts
- LON DALI-Controllers for control of electronic DALI components

Most of the devices are suitable for DIN rail mounting. These devices are sub-classified into the three product lines M, N and S.

Cables can be attached to the inputs and outputs of most devices in the M, N, and S product range by use of pluggable screw-type terminals. They can be quickly and easily replaced when the need arises.

This provides protection against polarity reversal – should the device be replaced – and against accidental contact at any time.

Clamp-type terminals allow up to four bus cables to be connected to the device, so that the line is not interrupted if a device is disconnected from the network.

Power lines and bus cables may be installed without spacing. Single insulated wires or power lines and bus cables either have to be installed with a spacing of 4 mm or they need an appropriate insulation (DIN VDE 01 10-1). A protective cap is included with the REG-M and REG-N modules, by means of which a clear separation of power line and bus cable is guaranteed.

The “DR-N” product line is the latest generation of I/O modules with the following features:

- Bus connection via 2-pin bus terminal with protective cap
- Pluggable screw-type terminals for inputs and outputs
- Status LED for every input and output
- Manual operation
- Free-Topology-Transceiver (FTT)
- DC 18...30 V supply voltage
- Configurable reaction of the outputs to power-down and power-up/reset

The “DR-M” product line consists of about 20 I/O modules with the following distinctive features:

- Bus connection via 2-pin bus terminal with protective cap
- Pluggable screw-type terminals for inputs and outputs
- Link Power Transceiver (LPT)



Due to Link-Power-technology, both data and the supply voltage for the control electronics can be transmitted via the LON network. Particularly, if the I/O modules are applied peripherally the complexity of cabling is minimised. LPT devices can be operated in combination with FTT devices in one subnet, but then they require an extra LON Power Supply


The "DR-S" product line includes, in addition to the DALI Controllers, four I/O modules with the following characteristics:

- Four resp. eight outputs and the same number of inputs for consumer loads and drives
- Status LED for every input and output
- Manual operation
- Pluggable screw-type terminals
- Free Topology Transceiver (FTT)
- 230 V supply voltage
- Configurable reaction of the outputs to power-down and power-up/reset

Conventional push buttons are normally connected to the digital inputs to operate the consumer loads at the outputs. Apart from that, the digital inputs can be used for floating contacts, e.g. of motion detectors, photo-electric lighting controllers, or thermostats, independently of the outputs. The contact current is approx. 10 mA. The contact voltage of about 24 V is generated by the device itself, so that no external power supply unit is required. Every input status, as well as the output states, is indicated by a status LED. Every output can be operated manually, using the push buttons on top of the casing.

All cables can be connected to the device using pluggable screw-type terminals. The REG-S modules are some of the few LON actuators that provide the opportunity to configure the outputs' reaction to power-down as well as to power-up/reset.

DALI Controller

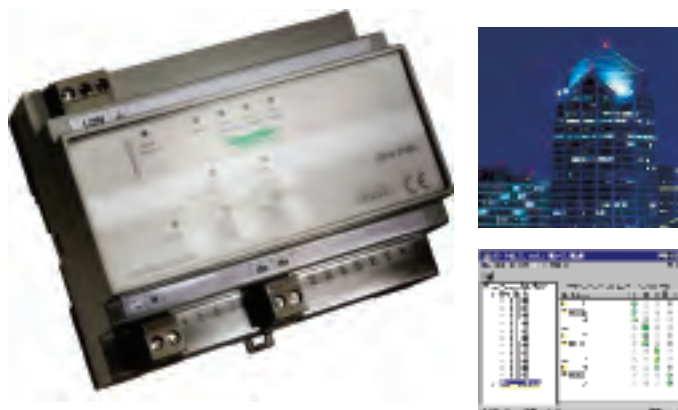

In many fields of application, dimmable lighting systems are becoming more and more important. The previous gap in communication existing between the LON network and the lamps is closed by DALI. This Digital Addressable Lighting Interface is a standardised interface for electronic ballasts developed by the leading European manufacturers.

By means of ballast addresses, the lamps of up to 64 DALI ballasts can be switched and dimmed individually via a common data line – without the usual brightness gradient due to the resistance of the control line.

The DALI ballasts can be divided into up to 16 groups. Every ballast provides 16 scene memory units for light levels so particular atmospheres can be recalled directly.


LON DALI Controllers DR-S 4DIM, 8DIM and 16DIM allow independent control of four, eight or 16 lighting groups respectively, according to the LonMark profiles. In addition, they provide the scene control of the DALI devices. Different characteristic curves of dimmable electronic ballasts from various manufacturers are conformed to automatically.

The LON DALI Controllers are DALI system devices. They control all DALI ballasts and connected DALI multisensors, and provide an interface between LON and the DALI bus. By use of the familiar LNS plug-in, the controllers can be configured and the DALI devices can be integrated completely in the LON bus system. Neither special accessory devices, nor software, are required.

The electronic DALI ballasts communicate bi-directionally, i.e. they can propagate their current state to other DALI devices. In combination with the appropriate equipment, lamps can announce failures to the LON DALI Controller. The latter transmits the message via the LON network to a building management centre or via a LON TCP/IP gateway to any other place in the world.

Up to 256 devices, divided into 64 DALI groups, can be connected to the LON DALI Gateway REG 4x16 DIM with four DALI control lines.

DALI Gateway

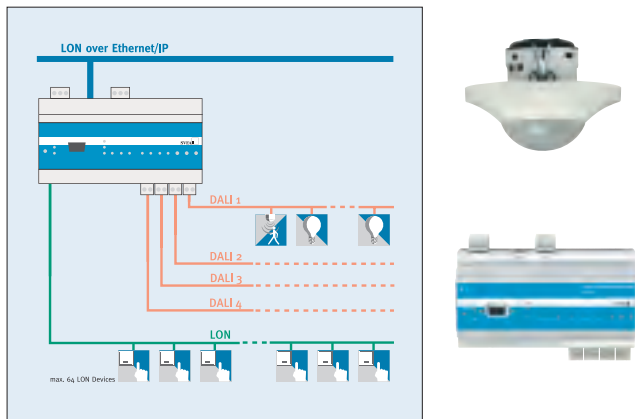

In addition to the DALI connections, the gateway also has a LON Twisted-Pair interface with Free Topology Transceiver, as well as an Ethernet interface.

The TP/FT interface is intended for connection of up to 64 LON control units via an Ethernet interface. The LON DALI Gateway usually communicates with a superior light management or building automation system by means of LON over IP, via an Ethernet interface. Other DALI Gateways are also being addressed in this way.

By means of the integrated Ethernet interface, a hierarchically very even but powerful interface, network structure emerges without IP-gateways.

Normally initiation is also carried out via an Ethernet interface. The setting of all internal parameters and configurations can be carried out by an LNS-independent configuration tool.

For constant light control and scene control, all relevant LonMark objects, such as "Lamp Actuator", "Constant Light Controller", "Occupancy Controller" and "Scene Controller" are available freely configurable, in virtually unlimited quantities. The common restrictions with LON devices, for example the limitation of 15 address table entries, no longer exist. The LON DALI Gateway can also be connected to the DALI LA-11 Multisensor.

The DALI Multisensor is a combination occupancy and light sensor.

For the first time, a cost-effective solution for creating an intelligent lighting control, as well as its integration into building automation, is offered by LON DALI Controllers, respectively by a LON DALI Gateway, in combination with the DALI Multisensor.

Multisensors



A demand-responsive single room control helps to save up to 70 percent of energy on lighting, heating and ventilation. To enable this, it is necessary, among other things to detect brightness and presence in the room.

Based on passive infrared technology, the LA-21 and ILA-22 LON multi-sensors are designed for presence-dependent lighting control.

Installed at a height of 2.5 m, these multi-sensors detect movement in a circular range of 14 m


The integrated light sensor is designed for daylight-dependent lighting control. Combined with the constant light controller objects of the dimmers, the 1-10 V control outputs or the DALI controllers, a cost-effective solution can be achieved.

The ILA-22 multi-sensor possesses an additional IR receiver. Combined with the remote control, it is possible to control scenes and sunblinds in addition to dimming and switching the lighting.

The multi-sensors feature a LON inter-face with a link-power transceiver, and can therefore be connected directly to a LON network. A further auxiliary supply is not required.

The multi-sensors are particularly suitable for installation in single and open-plan offices, foyers, stairways, class-, conference- and meeting rooms.

Temperature Control

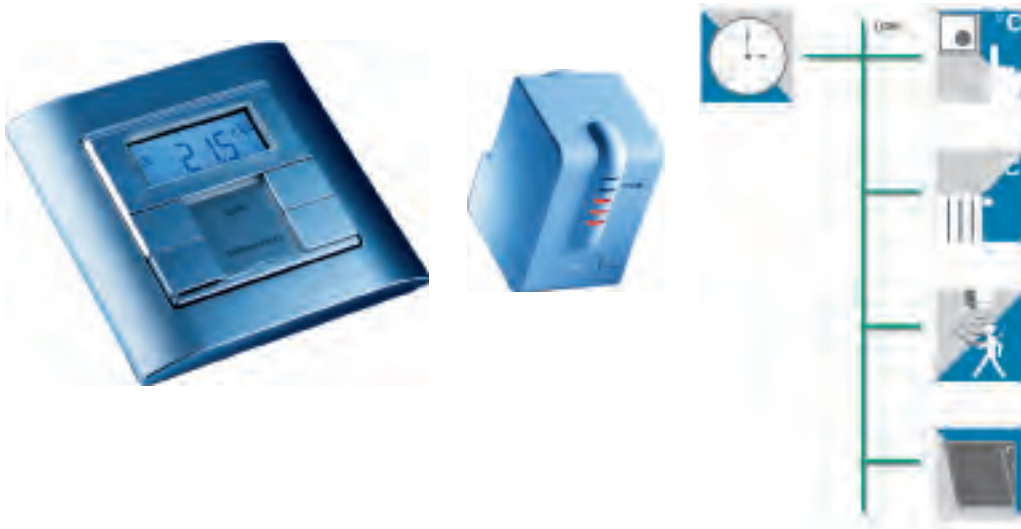

For single room temperature control, all sensors, actuators and the operating unit are combined with a central control unit in a star topography. This approach has many disadvantages:

- Extensive cabling between the devices
- Inflexibility due to fixed wiring
- Additional space is required for the control unit and cables
- The design of the control unit does not match the other switches and sockets.

Alternatively, the following approach can be adopted: the temperature sensor and the operating and control unit are integrated in one bus device ("Temperature Controller"). The controller transmits the manipulated variable via the LON network to an actuator (e. g. art. no. 62301-233) mounted on a cooling or heating battery in the ceiling void, which converts the command into a corresponding valve movement. Floating contacts, e. g. of architrave-type switches at the windows, or dew point sensors can be connected directly to the digital inputs of the valve actuator.

The following advantages result from decentralised room control:


- Simple and cost-effective cabling
- High flexibility in case of alterations or extensions
- The controller is available in all versions and designs.

Besides the LON network, only a temperature controller incl. LON Bus Coupling Unit, and at least one LON valve actuator (or other actuator) is required. This combination can be retrofitted by an occupancy sensor or a system clock. Via the LON network, the decentral single room control can be linked to other installation systems, such as lighting, sunblind or access control.

Lighting Control Products

System Components

Power Supply LPS 133


Image	Part Number	Additional Information
 <p>To be launched Q2 2010</p>	MTN884019	<ul style="list-style-type: none"> Power supply for devices with Link Power Transceivers Rated output current: <ul style="list-style-type: none"> 1 A (short-circuit- and overload-proof) if supply voltage 85 V .. 195 V 1.3 A (short-circuit- and overload-proof) if supply voltage > 195 V Max. continuous output current: 1.3 A if supply voltage > 195 V Bus power monitoring via relay output Adjustable bus terminator for free or line topology or without termination Supply voltage: AC 120/230 V (AC 85 .. 264 V) DIN rail mounting according to EN 50 022 Width of device: approx. 144 mm (8 pitch)

NEW

230V

LPT

LON Power Supply LPS-W


Image	Part Number	Additional Information
	11031-004	<ul style="list-style-type: none"> Power supply for devices with Link Power Transceivers Output current: max. 1.5 A (short-circuit- and overload-proof) Adjustable bus terminator for free or line topology Supply voltage: AC 230 V +/- 10 % DIN rail mounting according to EN 50 022 Width of device: approx. 215 mm (12 pitch)

OLD


230V

LPT

Power Supply ABL8MEM24012

Image	Part Number	Additional Information
	00785901551508	<ul style="list-style-type: none"> Power supply 24Vdc Nominal output current: . 1.2 A) Supply voltage: 100Vac to 240Vac DIN rail mounting / panel Width of device: approx. 72 mm (4 pitch)

Bus Coupling Unit UP

Image	Part Number	Additional Information
	MTN880451	<ul style="list-style-type: none"> LPT UPI Base module for flush-mounted LON devices and interface between EIB compatible application modules and LON network Screw fixing in flush-mounted boxes Software applications according to LonMark profile <p>"Switch (3200)" and "Scene Panel (3250)" to translate the signals of the connected application modules (push buttons, motion detectors, temperature controllers, etc.) into messages for light, sunblind, occupancy and single room temperature control A list of the supported application modules can be found on ExchangeOnline/Product zone/Field device Europe/Lighting Control.</p>


LPT

UPI

[Lighting Control Catalogue]


Panels

LON ARTEC Push button 1-gang

Image	Part Number	Appearance	Features
	MTN880701	polar white glossy	<ul style="list-style-type: none"> • Application module in Merten ARTEC design • Two push buttons for individually assigned functions • One status LED • Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light, sunblind or scene and occupancy control To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.
	MTN880711	stainless steel	


UPI

LON ARTEC Push button 2-gang

Image	Part Number	Appearance	Features
	MTN880721	polar white glossy	<ul style="list-style-type: none"> • Application module in Merten ARTEC design • Four push buttons for individually assigned functions • Two status LEDs • Other features as per LON ARTEC Push button 1-gang (art. no. MTN880701) • To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.
	MTN880731	stainless steel	

UPI


LON ARTEC Push button 4-gang

Image	Part Number	Appearance	Features
	MTN880741	polar white glossy	<ul style="list-style-type: none"> • Application module in Merten ARTEC design • Eight push buttons for individually assigned functions • Four status LEDs • Other features as per LON ARTEC Push button 1-gang (art. no. MTN880701) <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.</p>
	MTN880751	stainless steel	

UPI


[Lighting Control Catalogue]

LON ARTEC Room Control Unit RCU-61

Image	Part Number	Appearance	Features
	MTN880901	polar white glossy	<ul style="list-style-type: none"> Application module with display in Merten ARTEC design Backlit LC display Four push buttons for individually assigned functions with a status LED for each push button Two push buttons for setpoint adjustment and configuration of the display functions Continuous action controller for heating and cooling incl. integrated temperature sensor Calculates manipulated variables from setpoint and actual temperature values according to the particular operation mode
	MTN880911	stainless steel	<ul style="list-style-type: none"> Can control valves or switching actuators in combination with an electro-thermal control valve Two different setpoints for heating and cooling Display to indicate room temperature and operation modes as per comfort, standby, night Degree of protection: IP 20 Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Thermostat (8060)" for light, sunblind or scene and room temperature control <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.</p>


UPI

LON ARTEC Room Control Unit RCU-101

Image	Part Number	Appearance	Features
	MTN880921	polar white glossy	<ul style="list-style-type: none"> Application module in Merten ARTEC design Eight push buttons for individually assigned functions with a status LED for each push button IR receiver for control of the button functions via IR Remote Control (art. no. 42083-107)
	MTN880931	stainless steel	<ul style="list-style-type: none"> Piezo buzzer to indicate warnings or alarms other features as per LON ARTEC Room Control Unit RCU-61 (art. no. MTN880901) <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.</p>

UPI


Frame ARTEC 1-gang

Image	Part Number	Appearance	Features
	MTN481119	polar white glossy	<ul style="list-style-type: none"> Frame 1-gang in Merten ARTEC design Frames for multiple push button modules are available on request.
	MTN481146	stainless steel	


UPI

[Lighting Control Catalogue]

Frame ARTEC for RCU-101


Image	Part Number	Appearance	Features
	MTN481919	polar white glossy	<ul style="list-style-type: none"> Frame for RCU-101 in Merten ARTEC design
	MTN481946	stainless steel	

LON System-M Push button 1-gang

Image	Part Number	Appearance	Features
	MTN881401	polar white matt	<ul style="list-style-type: none"> Application module in Merten System-M design Two push buttons for individually assigned functions Two status LEDs Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light, sunblind or scene and occupancy control <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>


UPI

LON System-M Push button 2-gang

Image	Part Number	Appearance	Features
	MTN881451	polar white matt	<ul style="list-style-type: none"> Application module in Merten System-M design Four push buttons for individually assigned functions Two status LEDs Other features as per LON System-M Push button 1-gang (art. no. 46015-474) <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


LON System-M Push button 4-gang

Image	Part Number	Appearance	Features
	MTN881501	polar white matt	<ul style="list-style-type: none"> Application module in Merten System-M design Eight push buttons for individually assigned functions Four status LEDs Other features as per LON System-M Push button 1-gang (art. no. MTN881401) <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


[Lighting Control Catalogue]

LON System-M Push button MF 4-gang

Image	Part Number	Appearance	Features
	MTN881601	polar white matt	<ul style="list-style-type: none"> • Application module in Merten System-M design • Eight push buttons for individually assigned functions • Eight status LEDs • Other features as per LON System-M Push button 1-gang (art. no. MTN881401) To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.


UPI

LON System-M Push button MF-IR 4-gang

Image	Part Number	Appearance	Features
	MTN881651	polar white matt	<ul style="list-style-type: none"> • Application module in Merten System-M design • Eight push buttons for individually assigned functions • IR receiver for control of the button functions via IR Remote Control (art. no. MTN880991) • Eight status LEDs • Other features as per LON System-M Push button 1-gang (art. no. MTN881401) <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


LON System-M Room Control Unit RCU-61

Image	Part Number	Appearance	Features
	MTN880601	polar white matt	<ul style="list-style-type: none"> • Application module with display in Merten System-M design • Backlit LC display • Four push buttons for individually assigned functions with a status LED for each push button • Two push buttons for setpoint adjustment and configuration of the display functions • Continuous-action controller for heating and cooling incl. integrated temperature sensor • Calculates manipulated variables from setpoint and actual temperature values according to the particular operation mode • Can control valves or switching actuators in combination with an electro-thermal control valve • Two different setpoints for heating and cooling • Display to indicate room temperature and operation modes as per comfort, standby, night • Degree of protection: IP 20 • Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Thermostat (8060)" for light, sunblind or scene and room temperature control <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


[Lighting Control Catalogue]

LON System-M Room Control Unit RCU-101


Image	Part Number	Appearance	Features
	MTN880621	polar white matt	<ul style="list-style-type: none"> • Application module with display in Merten System-M design • Eight push buttons for individually assigned functions with a status LED for each push button • IR receiver for control of the button functions via IR Remote Control (art. no. MTN880991) • Piezo buzzer to indicate warnings or alarms • Other features as per LON System-M Room Control Unit RCU-61 (art. MTN880601) To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.

UPI


Frame M-PLAN 1-gang

Image	Part Number	Appearance	Features
	MTN486119	polar white matt	<p>Frame 1-gang in Merten M-PLAN design</p> <p>Frames for multiple push button modules are available on request.</p>

Frame M-PLAN for RCU-101

Image	Part Number	Appearance	Features
	MTN587319	polar white matt	<p>Frame for RCU-101 in Merten M-PLAN design</p>


Frame M-PLAN Glass 1-gang

Image	Part Number	Appearance	Features
	MTN489178	glass sapphire	<p>Frame 1-gang in Merten M-PLAN Glass design</p> <p>Frames for multiple push button modules are available on request.</p>

[Lighting Control Catalogue]

Digital output

I/O Module DR-N 4S-16A


Image	Part Number	Features
	MTN881831	<ul style="list-style-type: none"> • Independent switching of four load groups • Four relay outputs (N.O. contacts, 16 A) • Manual operation per output • Status signaling via manual switch • Power-down detection • Supply voltage: DC 24 V • Screw-type terminals • Width of device: approx. 72 mm (4 pitch) • Software application for control of four independent consumer loads according to LonMark profile "Lamp Actuator (3040)" including timers, logic operation, prioritised control and configurable reaction of the outputs to power-up/bus reset. <p>In addition, four "Scene Controllers (3251)" are available</p>

FTT

24V

UPI

I/O Module DR-N 8S 10A


Image	Part Number	Features
	MTN881801	<ul style="list-style-type: none"> • Independent switching of eight load groups • Eight relay outputs (N.O. contacts, 10 A) • Manual operation and status indication per output • Power-down detection • Supply voltage: DC 24 V • Pluggable screw-type terminals • Width of device: approx. 72 mm (4 pitch) • Software application for control of eight independent consumer loads according to LonMark profile "Lamp Actuator (3040)" including timers, logic operation, prioritised control and configurable reaction of the outputs to power-up/bus reset. • Two "Scene Controllers (3251)" are available.

FTT

24VDC

UPI

LON I/O Module DR-M 8S 10A


Image	Part Number	Features
	MTN880581	<ul style="list-style-type: none"> • Independent switching of eight load groups • Eight relay outputs (N.O. contacts, 10 A) • Manual operation and status LED per output • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 72 mm (4 pitch) • Software application for control of eight independent consumer loads according to LonMark profile "Lamp Actuator (3040)" without timers, logic operation or other controllers

LPT

UPI

[Lighting Control Catalogue]


LON I/O Module DR-M 8S 16A

Image	Part Number	Features
	MTN880651	<ul style="list-style-type: none"> Independent switching of eight load groups Eight relay outputs (N.O. contacts, 16 A) Manual operation per output Status signaling via manual switch Width of device: approx. 144 mm (8 pitch) Other features as per LON I/O Module DR-N 4S (art. no. MTN881831), but with eight "Lamp Actuator (3040)", two "Scene Controller (3251)" and one "Global Control" object

LPT

UPI

LON I/O Module DR-M 12S 16A

Image	Part Number	Features
	MTN880661	<p>Independent switching of twelve load groups</p> <ul style="list-style-type: none"> Twelve relay outputs (N.O. contacts, 16 A) <p>Manual operation per output</p> <p>Status signaling via manual switch</p> <p>Width of device: approx. 216 mm (12 pitch)</p> <ul style="list-style-type: none"> Other features as per LON I/O DR-N 4S (art. no. MTN881831), but with twelve "Lamp Actuator (3040)" and one "Global Control" object


LPT

UPI

[Lighting Control Catalogue]

Sunblind

I/O MODULE DR-N MSCU4-AC


Image	Part Number	Features
	MTN881811	<ul style="list-style-type: none"> Control of four customary sunblinds by use of interference-suppressed standard motors Eight relay outputs (N.O. contacts, 10 A) Manual operation and status indication per output Power down detection Supply voltage: DC 24 V Pluggable screw-type terminals Width of device: approx. 72 mm (4 pitch) Software application for control of four independent sunblind drives. Opportunity of prioritised control, analysis of meteorological data for sunblind protection, scene and group control

FTT

24VDC

UPI

LON I/O Module REG-S MSE4 8DI 24V


Image	Part Number	Features
	35236-199	<ul style="list-style-type: none"> Eight inputs (AC 24 V) and eight relay outputs (N.O. contacts, 10 A) Control of four customary sunblinds by use of interference-suppressed standard motors (AC 230 V) Software application for control of four independent sunblind drives including prioritised control, analysis of meteorological data for sunblind protection, scene and group control and according to LonMark profile "Switch (3200)", "Scene Panel (3250)" or "Occupancy Sensor (1060)" for translation of the slopes at the digital inputs into messages for light or sunblind control including configurable pulse-edge evaluation Other features as per LON I/O Module REG-S 4W4S 8DI 24V (art. no. 35236-151)

FTT

230V

UPI

LON I/O Module REG-S MSE2 4DI 24V


Image	Part Number	Features
	35236-174	<ul style="list-style-type: none"> Four inputs (AC 24 V) and four relay outputs (N.O. contacts, 10 A) Control of two customary sunblinds by use of interference-suppressed standard motors (AC 230 V) Software application for control of two independent sunblind drives including prioritised control, analysis of meteorological data for sunblind protection, scene and group control and according to LonMark profile "Switch (3200)", "Scene Panel (3250)" or "Occupancy Sensor (1060)" translation of the slopes at the digital inputs into messages for light or sunblind control including configurable pulse-edge evaluation Other features as per LON I/O Module REG-S 4W 4DI 24V (art. no. 35236-150)

FTT

230V

UPI

LON I/O Module REG-M MSE4

Image	Part Number	Features
	32333-203	<ul style="list-style-type: none"> Control of four customary sunblinds by use of interference-suppressed standard motors (AC 230 V) Eight relay outputs (N.O. contacts, 6 A) Manual operation and status LED per output Pluggable screw-type terminals DIN rail mounting according to EN 50 022 Width of device: approx. 72 mm (4 pitch) Software application for control of four independent sunblind drives. Opportunity for prioritised control, analysis of meteorological data for sunblind protection, scene and group control and configurable reaction of the outputs to power-up and bus reset.


230V

UPI


[Lighting Control Catalogue]

DALI Controller

LON DALI-Controller REG-S 4DIM


Image	Part Number	Features
	<p>36236-128</p>	<ul style="list-style-type: none"> • Control and supply of up to 64 DALI devices, divided into four groups • Addressing of the DALI devices with LNS plug-in • Provides DALI supply voltage, 16 V • Status monitoring of all connected DALI devices • Monitoring of all lamps (if DALI compatible) • Status LEDs for diagnostics and status indication • Manual operation for direct control of DALI devices • DALI device replacement with manual operation • Pluggable screw-type terminals • Supply voltage: AC 230 V • DIN rail mounting according to EN 50 022 • Width of device: approx. 105 mm (6 pitch) • Software application for control of up to 64 DALI devices, divided into four groups including timers, prioritised control and configurable reaction to power-down/power-up/bus reset. In addition, the application provides constant light and scene control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)" and scene control in the DALI devices <div style="float: right; margin-top: 10px;"> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; margin-bottom: 5px; display: inline-block;">DALI</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; margin-bottom: 5px; display: inline-block;">FTT</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; margin-bottom: 5px; display: inline-block;">230V</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block;">SPI</div> </div>

DALI-Controller DR-S 8DIM

Image	Part Number	Features
	<p>MTN887251</p>	<ul style="list-style-type: none"> • Control and supply of up to 64 DALI devices, divided into up to eight groups • Addressing of the DALI devices with LNS plug-in • Provides DALI supply voltage, 16 V • Status monitoring of all connected DALI devices • Monitoring of all lamps (if DALI compatible) • Status LEDs for diagnostics and status indication • Manual operation for direct control of DALI devices • DALI device replacement with manual operation • Pluggable screw-type terminals • Supply voltage: AC 230 V • DIN rail mounting according to EN 50 022 • Width of device: approx. 105 mm (6 pitch) • Software application for control of up to 64 DALI devices, divided into four groups including timers, prioritised control and configurable reaction to power-down/power-up/bus reset. Furthermore, the application provides constant light and scene control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)" and scene control in the DALI devices <div style="float: right; margin-top: 10px;"> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; margin-bottom: 5px; display: inline-block;">FTT</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; margin-bottom: 5px; display: inline-block;">230V</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block;">SPI</div> </div>

[Lighting Control Catalogue]

LON DALI-Controller REG-S 16DIM

Image	Part Number	Features
	36236-236	<ul style="list-style-type: none"> • Features as per LON DALI-Controller REG-S 4DIM (art. no. 36236-128), but this controller can control up to 16 DALI groups


DALI

FTT

230V

SPI

LON DALI Gateway REG 4x16 DIM

Image	Part Number	Features
	36236-332	<ul style="list-style-type: none"> • Four DALI outputs to control up to 64 DALI devices for each output, divided into sixteen groups • EIA-232 interface for device configuration • TP/FT-10 transceiver and Ethernet socket • Addressing of the DALI devices with LNS plug-in • Status monitoring of all connected DALI devices • Monitoring of all lamps (if DALI compatible) • Status LEDs for diagnostics and status indication • Manual operation for direct control of DALI devices • Pluggable screw-type terminals • Supply voltage: DC 24 V • DIN rail mounting according to EN 50 022 • Width of device: approx. 157 mm (7 pitch) • Software application for control of the DALI devices, including timers, prioritised control and configurable reaction to power-down/power-up/bus reset. In addition, the application provides constant light and scene control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)" and scene control in the DALI devices • A power supply for the DALI gateway and the DALI devices (art. no. 11837-467) has to be ordered separately if required.

DALI


IRC

IP

FTT

230V

DALI power Supply REG-N 140


Image	Part Number	Features
	11837-467	<ul style="list-style-type: none"> • Power supply for the LON DALI-Gateway REG 4x16 DIM • One output DC 24 V (max. 7 W) • Outputs for the supply of four DALI lines (DC 16 V, 116 mA per output) • LED per output for status and failure indication • Supply voltage: AC 230 V • Temperature range: 5°C .. 40°C • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 72 mm (4 pitch)

230V

[Lighting Control Catalogue]

DALI Multi-Sensors


DALI Multi-Sensor LA-11

Image	Part Number	Features
	MTN880641	<ul style="list-style-type: none"> • Combination of occupancy sensor and brightness sensor with DALI interface • Suitable for LON DALI Controller DR-S 8DIM and DALI Gateway REG 4x16 DIM (art. no. 36236-332) • Flush-mounting (surface-mounting in combination with Surface Mounting Box, art. no.MTN550619) • Circular sensor range with a diameter of approx. 14 m at 2.5 m mounting height • Detection range: 360 degrees • Five detection levels with 284 control segments in 71 zones • Brightness sensor for daylight-dependent light control, sensor range: 10 .. 1,000 Lux • Dimensions of surface-mounted sensor: 105 x 42.6 mm (D x H) • Potential free contact (delayed detection)

DALI


Occupancy/Motion Detectors

LON ARTEC Motion Detector

Image	Part Number	Appearance	Features
	MTN880971	polar white matt	<ul style="list-style-type: none"> • Indoor motion detector in Merten ARTEC design • Detection of movements within a horizontal angle of 180 degrees • Motion-dependent control of room functions • Integrated and individually adjustable threshold value switch for brightness-dependent light control • Software applications to translate the detected movements according to LonMark profile "Occupancy sensor (1060)" into LON messages for occupancy-dependent light control and "Occupancy controller(3071)" <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.</p>
	MTN880981	stainless steel	

UPI


LON System-M Motion Detector

Image	Part Number	Appearance	Features
	MTN881201	polar white matt	<ul style="list-style-type: none"> • Indoor motion detector in Merten System-M design • Detection of movements within a horizontal angle of 180 degrees • Motion-dependent control of room functions • Integrated and individually adjustable threshold value switch for brightness-dependent light control • Software application to translate the detected movements according to LonMark profile "Occupancy Sensor (1060)" and "Occupancy Controller (3071)" into LON messages for occupancy-dependent light control <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


[Lighting Control Catalogue]

LON System-M Motion Detector 2.2m

Image	Part Number	Appearance	Features
	MTN881251	polar white matt	<ul style="list-style-type: none"> Indoor motion detector in Merten System-M design Detection of movements for motion-dependent control of room functions Integrated and individually adjustable threshold value switch for brightness-dependent light control Area of detection: 180° Range: 8 m left/right, 12 m at the front Mounting height: 2.2 m or 1.1 m with half the range Software application to translate the detected movements according to LonMark profile "Occupancy Sensor (1060)" and "Occupancy Controller (3071)" into LON messages for occupancy-dependent light control <p>To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured design.</p>

UPI


Multi-Sensor LA-21

Image	Part Number	Features
	MTN880541	<ul style="list-style-type: none"> Combination of occupancy sensor and brightness sensor Flush-mounting (surface-mounting in combination with Surface Mounting Box, art. no. 42020-106) Circular sensor range with a diameter of approx. 14 m at 2.5 m mounting height Detection range: 360 degrees Several detection levels with over all 544 control segments in 136 zones Brightness sensor for daylight-dependent light control, sensor range: 10 .. 1,000 Lux Dimensions of surface-mounted sensor: 105 x 42.6 mm (D x H) Software application to translate the detected movements (according to LonMark profile "Occupancy Sensor (1060)" and "Occupancy Controller (3071)", resp. the detected brightness (LonMark profile "Light Sensor (1010)") into LON messages for occupancy-dependent light or sunblind control The Surface Mounting Box (art no. MTN550619) has to be ordered separately if required.

LPT

UPI

Multi-Sensor ILA-22


Image	Part Number	Features
	MTN880551	<ul style="list-style-type: none"> Combination of occupancy sensor, brightness sensor and IR receiver IR receiver for control of various room functions (in combination with IR Remote Control, art. no. MTN880991) Software application to translate the detected movements (according to LonMark profile "Occupancy Sensor (1060)" and "Occupancy Controller (3071)", resp. the detected brightness (LonMark profile "Light Sensor (1010)") into LON messages for occupancy-dependent light or sunblind control as well as for control of room functions (LonMark profile "Switch (3200)" and "Scene Panel (3250)") by use of the received IR signals Other features as per LON Multi-Sensor LA-21 (art. no. MTN880541) The IR Remote Control (art. no. MTN880991) and the Surface Mounting Box (art no. MTN550619) have to be ordered separately if required.

LPT


UPI

[Lighting Control Catalogue]

Surface Mounting Box for Multi-Sensor LA-21/ILA-22


Image	Part Number	Features
	MTN550619	<ul style="list-style-type: none"> For surface-mounting of the LON Multi-Sensor LA-21 (art. no. MTN880541) and ILA-22 (art. no. MTN880551) Colour: polar white (similar to RAL 9010)

IR Remote Control

Image	Part Number	Features
	MTN880991	<ul style="list-style-type: none"> For recalling up to ten different room functions for lighting, sunblinds, etc. Suitable for the articles LON Room Control Unit RCU-101 (System-M und ARTEC), LON Push button MF-IR, RCP-80, RCP-81 and LON Multi-Sensor ILA-22 The required batteries, 2 pieces AAA (micro), are not included.

Temperature Controllers


LON ARTEC Temperature Controller RTR-51

Image	Part Number	Appearance	Features
	MTN880951	polar white glossy	<ul style="list-style-type: none"> Continuous-action controller for heating and cooling incl. integrated temperature sensor in Merten ARTEC design Calculates manipulated variables from setpoint and actual temperature values according to the particular operation mode
	MTN880961	stainless steel	<ul style="list-style-type: none"> Can control a valve or switching actuator in combination with an electro-thermal control valve Two different setpoints for heating and cooling Status LEDs to indicate operation modes like comfort, standby, night, frost/heat protection and controller inhibit Presence button, to change over from standby to comfort mode Rotary switch for setpoint adjustment Degree of protection: IP 20 Software application according to LonMark profile "Thermostat (8060)" and "Space Comfort Control Command Module (8090)" To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.

LPT

UPI

LON System-M Temperature Controller RTR-51


Image	Part Number	Appearance	Features
	MTN881301	polar white matt	<ul style="list-style-type: none"> Continuous-action controller for heating and cooling incl. integrated temperature sensor in Merten System-M design other features like LON Artec temperature controller RTR-51
			<ul style="list-style-type: none"> To be completed with a LON Bus Coupling Unit UP (MTN880451) and a frame in the favoured colour.

LPT


UPI

Dimmer Output

I/O Module DR-N DIM 500-UNI


Image	Part Number	Features
	MTN881011	<ul style="list-style-type: none"> • Universal dimmer for switching and dimming of incandescent, • HV-halogen and LV halogen • lamps with dimmable wound or electronic transformers • Connected load: max. 500 VA • Automatic load detection • Combinations of ohmic and inductive or ohmic and capacitive loads are possible, • combinations of inductive and capacitive loads are not allowed • Electronic short-circuit and overload proof • Power down detection • Status LED and manual switch for ON/OFF • Supply voltage: DC 24 V • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 72 mm (4 pitch) • Software application for dimming the light including timers, prioritised control and • configurable reaction to power-up/bus reset. Furthermore, the application provides constant light, scene and occupancy control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)", "Scene Controller (3251)" and "Occupancy Controller (3071)" <div style="text-align: right; margin-top: 10px;"> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block; margin-bottom: 5px;">FTT</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block; margin-bottom: 5px;">24VDC</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block;">UPI</div> </div>

I/O Module DR-N 3DIM 1-10V

Image	Part Number	Features
	MTN881001	<ul style="list-style-type: none"> • Control of devices with 1-10 V interface (controllable electronic ballasts, electronic transformers etc.) • Three analog outputs (1-10 V) for dimming and three relay outputs (N.O. contact, 16 A) for switching • Current load (analog output): max. 100 mA • Power down detection • Pluggable screw-type terminals • Supply voltage: DC 24 Vs • Switch for manual control of the relay contact • Screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 75 mm (4 pitch) • Software application for dimming the light including timers, prioritised control and configurable reaction to power-up/bus reset. In addition, the application provides constant light and scene control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)", "Scene Controller (3251)" <div style="text-align: right; margin-top: 10px;"> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block; margin-bottom: 5px;">FTT</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block; margin-bottom: 5px;">24VDC</div> <div style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block;">UPI</div> </div>

[Lighting Control Catalogue]

I/O Module DR-M DIM 400-RC


Image	Part Number	Features
 <p>To be phased out Q1 2010 replaced by MTN881011</p>	MTN880111	<ul style="list-style-type: none"> Phase control dimming (leading edge) of incandescent lamps, HV halogen lamps and electronic transformers Connected load: max. 400 VA Electronic short-circuit and overload protection Status LED and switch for manual change between ON, OFF and bus mode Pluggable screw-type terminals DIN rail mounting according to EN 50 022 Width of device: approx. 72 mm (4 pitch) Software application for dimming the light including timers, prioritised control and configurable reaction to power-up/bus reset. In addition, the application provides constant light and scene control according to LonMark profile "Lamp Actuator (3040)", "Constant Light Controller (3050)", "Scene Controller (3251)" and "Occupancy Controller (3071)"

OLD

LPT

UPI

I/O Module DR-M DIM 500-RL

Image	Part Number	Features
 <p>To be phased out Q1 2010 replaced by MTN881011</p>	MTN880101	<ul style="list-style-type: none"> Phase control dimming (trailing edge) of incandescent lamps, HV halogen lamps and dimmable, wound transformers Connected load: 25 .. 500 VA Short-circuit and overload protection Status LED, overload indicator and switch for manual change between ON, OFF and bus mode Pluggable screw-type terminals DIN rail mounting according to EN 50 022 Width of device: approx. 72 mm (4 pitch) Software application as per LON I/O Module DR-M DIM 400-RC (art. no. MTN880111)


OLD

LPT

UPI

Digital Inputs

I/O Module DR-M 4DI


Image	Part Number	Features
	MTN880501	<ul style="list-style-type: none"> Connection of devices with floating contacts Four inputs Status LED per input Pluggable screw-type terminals DIN rail mounting according to EN 50 022 Width of device: approx. 45 mm (2.5 pitch) Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light or sunblind control including configurable pulse-edge evaluation; additionally an application with "Partition Wall Controller" is available

LPT

UPI

[Lighting Control Catalogue]


LON I/O Module REG-M 4DI AC/DC

Image	Part Number	Features
	31333-251	<ul style="list-style-type: none"> • Connection of conventional devices with 24 V output • Four inputs (AC/DC 12 .. 30 V) • Status LED per input • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 45 mm (2.5 pitch) • Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light or sunblind control including configurable pulse-edge evaluation

LPT

UPI


LON I/O Module REG-M 8DI AC/DC

Image	Part Number	Features
	31333-252	<p>Connection of conventional devices with 24 V output Eight inputs (AC/DC 12 .. 30 V) Width of device: approx. 72 mm (4 pitch)</p> <ul style="list-style-type: none"> • Other features as per LON I/O Module REG-M 4DI AC/DC (art. no. 31333-251)

LPT

UPI


LON I/O Module REG-M 8DI DC-P

Image	Part Number	Features
	31333-254	<ul style="list-style-type: none"> • Connection of devices with floating contacts • Eight inputs • Status LED per input • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 72 mm (4 pitch) • Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light or sunblind control including configurable pulse-edge evaluation

LPT

UPI

LON I/O Module REG-M 8DI 230V

Image	Part Number	Features
	31333-256	<ul style="list-style-type: none"> • Connection of conventional devices with 230 V output • Eight inputs (AC 230 V) • Status LED per input • Pluggable screw-type terminals • DIN rail mounting according to EN 50 022 • Width of device: approx. 72 mm (4 pitch) • Software application according to LonMark profile "Switch (3200)", "Scene Panel (3250)" and "Occupancy Sensor (1060)" for light or sunblind control including configurable pulse-edge evaluation


LPT

UPI

[Lighting Control Catalogue]

Combined In-/Outputs

LON I/O Module REG-N 8DI 8DO AC


Image	Part Number	Features
	35237-348	<ul style="list-style-type: none"> • Independent switching of eight load groups • For control of electro-thermal control valves • Eight inputs for connection of devices with floating contacts • Eight outputs: semiconductors AC 24 V (external supply required) • Manual operation and status indication per output and input • Supply voltage: DC 24 V • Pluggable screw-type terminals • Width of device: approx. 72 mm (4 pitch) • Software application for control of eight independent consumer loads according to LonMark profile "Valve Positioner (8131)" or "Lamp Actuator (3040)" (two different applications). The slopes at the digital inputs are translated according to LonMark profile "Switch (3200)"

FTT

24VDC

UPI

LON I/O Module REG-S 4W 4DI 24V


Image	Part Number	Features
	35236-150	<ul style="list-style-type: none"> • Four inputs (AC 24 V) and four relay outputs (changeover contacts, 10 A) • Independent switching of four load groups • Connection of four push buttons or other floating contacts • Contact voltage per input: approx. AC 24 V • Contact current per input: approx. 10 mA • Manual operation and status LED for every input and output • Power-down detection • Pluggable screw-type terminals • Supply voltage: AC 230 V • DIN rail mounting according to EN 50 022 • Width of device: approx. 105 mm (6 pitch) • Software application for control of four independent consumer loads according to LonMark profile "Lamp Actuator (3040)" including timers, logic operation, prioritised control and configurable reaction of the outputs to power-down/power-up/bus reset. In addition, two "Scene Controllers (3251)" are available and a definable group of outputs can be switched on and off simultaneously. The slopes at the digital inputs are translated according to LonMark profile "Switch (3200)", "Scene Panel (3250)" or "Occupancy Sensor (1060)" for light or sunblind control including configurable pulse-edge evaluation.

FTT

24VDC

UPI

LON I/O Module UP 6DI 2DO

Image	Part Number	Features
	35212-362	<ul style="list-style-type: none"> • Connection of conventional push buttons or other floating contacts • Six inputs and two outputs • Mounting in installation socket of 63 mm depth • Clamp-type terminals • Supply voltage: DC 24 V • Contact voltage: approx. DC 24 V • Dimensions: 57 x 57 x 21 mm (H x W x D) • Software application according to LonMark profile "Switch (3200)" for light or sunblind control

FTT


24VDC

UPI

[Lighting Control Catalogue]

Physical Sensors


LON Multi-Sensor LT-23 AP

Image	Part Number	Features
	43334-114	<ul style="list-style-type: none"> • For daylight- and outdoor temperature-dependent controls • Integrated light and temperature sensor • Range of the light sensor: 1 .. 65,000 Lux • Range of the temperature sensor: -20 .. +50 °C • Pole- or wall-mounting • Degree of protection: IP 54 • Dimensions: 93 x 72 x 57 mm (H x W x D) • Application for transmission of the measured values to the LON network (LonMark profile "Light Sensor (1010)" and "Temperature Sensor (1040)") and with threshold value switches for analysis of the detected values

LPT

UPI


LON Indoor Temperature Sensor AP RTS-10

Image	Part Number	Features
	63325-246	<ul style="list-style-type: none"> • For indoor temperature-dependent controls • Integrated temperature sensor • Measuring range of temperature sensor: -5 .. +50 °C • Wall-mounting • Degree of protection: IP 20 • Dimensions: 73 x 73 x 24 mm (H x W x D) • Application for transmission of the measured values to the LON network according to LonMark profile "Temperature Sensor (1040)" and with threshold value switch for analysis of the detected values

LPT

UPI


LON Valve Actuator SA-22

Image	Part Number	Features
	62301-233	<ul style="list-style-type: none"> • Heating and cooling applications • Two inputs for floating contacts (e. g. for window control, occupancy sensors or dew point detectors etc.) • Regular automatic valve adjustment and valve lift detection • Service pin and service LED • Status LEDs to indicate the valve lift • Connection via pre-assembled, fixed cable (approx. 1 m) • Very low-noise operation • Mounting on thermostatic valve connection thread M30x1.5 • Dimensions: 82 x 50 x 65 mm (H x W x D) • Software application for drive control and analysis of the digital input values according to the applicable LonMark profiles

LPT

UPI

LON Sensor Unit SE-843

Image	Part Number	Features
	43230-036	<ul style="list-style-type: none"> • FTT 230V SPI • For sunblind control • Connection of eight light sensors, three wind sensors, one rainfall gauge and one sensor each for temperature, relative humidity and wind direction • Propagates the measured values via the LON network to the connected devices • Supply voltage: AC 230 V • DIN rail mounting according to EN 50 022 • Dimensions: 110 x 190 x 58 mm (H x W x D) (approx. 11 pitch)


FTT

230V


SPI

[Lighting Control Catalogue]


Outdoor Temperature Sensor MWG-AT

Image	Part Number	Features
	43021-040	<ul style="list-style-type: none"> • For connection to the LON Sensor Unit SE-843 (art. no. 43230-036) • Precise outdoor temperature detection • Special protection against heating due to incident solar radiation • Measuring range: -25 .. +70 °C • A mounting pole and further accessories are available on request.


Brightness Sensor MWG-H

Image	Part Number	Features
	43021-038	<ul style="list-style-type: none"> • Connection to the LON Sensor Unit SE-843 (art. no. 43230-036) • Detection of the ambient brightness level • Incl. adjusting unit • Measuring range: 0.2 .. 100 kLux • A mounting pole and further accessories are available on request.


Rainfall Gauge MWG-N

Image	Part Number	Features
	43020-098	<ul style="list-style-type: none"> • For connection to the LON Sensor Unit SE-843 (art. no. 43230-036) • Rainfall detection via photoelectric IR light barrier system • Adjustable sensitivity • For supply of the electronics and heating the casing top a Power Supply AP 1024 AC is required • The Power Supply AP 1024 AC (art. no. 49023-041) needed for operation has to be ordered separately. • A mounting pole and further accessories are available on request.

Wind Sensor MWG-W

Image	Part Number	Features
	43020-037	<ul style="list-style-type: none"> • For connection to the LON Sensor Unit SE-843 (art. no. 43230-036) • Precise aluminium detecting element for vectorial wind speed measuring • Measuring range: 0.3 .. 40 m/s • Heatable by use of the Power Supply AP 1024 AC • The Power Supply AP 1024 AC (art. no. 49023-041) has to be ordered separately if required. • A mounting pole and further accessories are available on request.

Power Supply AP 1024 AC

Image	Part Number	Features
	49023-041	<ul style="list-style-type: none">• For supply of the Rainfall Gauge (art. no. 43020-098) or the Wind Sensor (art. no. 43020-037)• Output voltage: AC 22 .. 27 V• Output current: 1 A• Supply voltage: AC 230 V• Degree of protection: IP 30• Dimensions: 189 x 79 x 52 mm (H x W x D) <div data-bbox="1246 280 1469 347" style="border: 1px solid green; border-radius: 15px; padding: 5px; display: inline-block;">230V</div>

FTT LPT	Type of transceiver used
230V	Supply voltage 230V
24V	Supply voltage 24V
NEW	New article
OLD	Discontinued line
UPI	Universal plug-in available
SPI	Device specific plug-in available
IP	Ethernet/LON over IP
IRC	Configuration tool for DALI gateway
DALI	Digital Adressable Lighting Interface

Office locations for UK

Ashby-de-la-Zouch Head Office

Smisby Road,
Ashby-de-la-Zouch
Leicestershire
LE65 2UG

Tel: +44 (0)1530 417733
Fax: +44 (0)1530 415436

Maidenhead

Braywick House East
Windsor Road
Maidenhead
SL6 1DN

Tel: +44 (0)844 994 0317
Fax: +44 (0)1628 741101

London

3rd Floor
120 New Cavendish Street
London
W1W 6XX

Tel: +44 (0)844 994 0317
Fax: +44 (0)203 107 1611

Warrington

Europa House
Gemini Business Park
310 Europa Boulevard
Warrington
WA5 7XR

Tel: +44 (0)1925 401000
Fax: +44 (0)1925 401166

Scotland

Units 1-6
Technology Building
James Watt Avenue
Scottish Enterprise Technology Park
East Kilbride
G75 0QD

Tel: +44 (0)1355 233732
Fax: +44 (0)1355 23940

.....

Office locations for Ireland

Belfast

Units 1 & 2
40 Montgomery Road
Belfast
BT6 9HL

Tel: +44 (0) 2890 705545
Fax: +44 (0) 2890 702215

Cork

Unit 38,
Eastgate Drive
Little Island
Cork

Tel: + 353 (0) 21 435 4388
Fax: + 353 (0) 21 435 4398

Dublin

Block A, Maynooth Business Campus
Maynooth,
County Kildare
Ireland

Tel: +353 (0)1 651 0640
Fax: + 353 (0)1 651 0641



As standards, specifications and designs change from time to time,
please ask for confirmation of the information given in this publication
SE7071 © Schneider Electric, August 2010

