



Emergency Lighting Product Catalogue



Legend

Product icons

Lamp type







Duration (self-contained)





Ingress rating

































nsulation class



Insulation class II. Earthing this luminaire is not required

Luminaire mounting











Battery type









enefits











Can be dimmed with use of additional potentiometer



Can be used in



Portable, for use

Product approvals



This product has ENEC approval.



This product has BSI Kitemark approval.



All products in this catalogue are CE marked and carry the $\overline{\mathbb{Y}}$ mark.

Testing solutions



This product is also available with Naveo addressable testing and remote management facility.



This product is also available with IR2 infra-red



This product is also available with Self-Test testing facility.



EMERGI-LITE

The Emergi-Lite brand from Thomas & Betts delivers highly versatile emergency lighting solutions to a wide range of industries, with the protection and safety of human life paramount.

At Thomas & Betts, our focus is on improving your business performance by providing practical, reliable electrical products and services that connect and protect for life and solve everyday problems in the areas of Wire & Cable Management, Cable Protection, Power Connection & Control and Safety Technology.

Our extensive engineering, supply chain management and technical sales support teams are committed to understanding everything that impacts your ability to accomplish your business objectives by reducing your total cost of ownership.

Whether you are designing, installing, operating, maintaining or owning an office building, offshore platform, hospital, high speed train, power generating plant, machine equipment or a manufacturing facility, Thomas & Betts engineered products fit and function in your application while providing superior performance, sustainability and value throughout the project life cycle.

All our brands are built upon four product and service solution platforms.

Platforms that address you or your customers' critical electrical needs covering the protection of data, energy, processes, assets and personal safety.

Beyond high-performance application characteristics, Thomas & Betts products, information and services facilitate and speed up your time critical assembly, installation and maintenance processes.

With a dedicated team, we can support you with a full set of services and flagship product brands including:





















Introduction	2 - 7
Serenga LED	8 - 23
Horizon	24 - 30
Aqualux	31 - 38
Previx NEW	39 - 43
Escape Line	44 - 65
Industrial	66 - 71
Testing solutions	72 - 78
Reference & design	79 - 95
Supplementary solutions & literature	96 - 98
Index	99 - 100











HQ ASSESSED TO BS EN ISO9001: 2000 FOR THE MANAGEMENT OF EMERGENCY LIGHTING AND FIRE DETECTION EQUIPMENT AND THE MODIFICATION OF MAINS LUMINAIRES FOR EMERGENCY LIGHTING APPLICATIONS Cert no: FM09470

Products in this catalogue are manufactured in a Thomas & Betts facility in the EU. In some special product cases product hybrids may be sourced from our Thomas & Betts Canadian facility.

Waste Electrical and Electronic Equipment Regulations 2006 ("the WEEE Regulations")

The British Government has introduced the Waste Electrical and Electronic Equipment Regulation 2006 ("WEEE"), from 1st July 2007.



Producer Responsibility

Thomas & Betts Ltd (Emergi-Lite Safety Systems) meets its producer responsibility via membership of the Lumicom Producer Compliance Scheme (registration no. WEEE/DH0073UQ). Under this scheme, de-polluted luminaires (i.e. those with the lamps, batteries and liquid filled capacitors removed), which are being replaced by our fittings, will be recycled in an environmentally sound manner.

Producers (or their agents) are required to finance the environmentally sound disposal of non-household luminaires and the gas discharge lamps within them. Therefore there will be a recycling charge, which may vary from time to time.

Battery Directive

Battery Producer recycling registration number: BPRN00373.



Introduction



When choosing a partner for emergency lighting, you need a supplier capable of delivering a solution whenever the need arises, whether you're planning a new build project, overseeing an installation, or considering renewal of a long-standing system.

By choosing Emergi-Lite as your emergency lighting partner, you'll be placing your projects, your systems, and essentially your people, in safe hands.

Emergi-Lite is a leading life safety solutions provider, delivering state-of-the-art systems and products into the emergency lighting marketplace.

Emergi-Lite focuses on supporting our customers at all points of the emergency lighting life-cycle, whether planning, installing, managing or renewing:

Planning

From project consultations at customer premises, to drafting certified technical drawings, Emergi-Lite is ready to support all your emergency lighting needs.

Installing

The right products, delivered at the right time, to ensure your installations run smoothly - on time and on budget.

Managing

The clear and precise after-sales support you would expect from a leading emergency lighting supplier, including servicing, maintenance and readily-available replacement parts.

Renewing

Keeping you up-to-date with the latest standards, industry developments and new product innovations, making renewing your emergency lighting a simple, straightforward process.

Emergi-Lite: with you every step of the emergency lighting process







Introduction plan



With every emergency lighting project, there is a clear and important need for effective planning and preparation.

Products need to be assessed, customer requirements defined, building regulations respected and design drawings prepared.

With project time-lines tight and budgets constrained, choosing the right partner for emergency lighting system design is imperative. By choosing Emergi-Lite, you'll be making the right start.

Emergi-Lite works at the heart of this complex process, assisting designers, specifiers, and final customers with all manner of emergency lighting need.

PLAN
Consult
Besign
Centify

From project consultation, to certified technical drawings, Emergi-Lite is here to help.

Emergi-Lite delivers solutions that work across the spectrum of emergency lighting systems, and impact at all points of the emergency lighting life-cycle.

Our products and services are specifically designed to provide the most effective protection and safety, in line with customer needs, relevant standards and industry regulations.

These solutions start at the planning stage for emergency lighting systems, with advice on product selection and system requirements, through to delivery of certified technical drawings.

Project consultation

When designing emergency lighting systems, it is important to have the most complete and accurate information available, and the best possible advice on regulations, standards and safety requirements.

This catalogue makes for a great starting point when considering emergency lighting, but is only a small part of our service.

That's why you should call us, and count on us to help with your emergency lighting planning.

We offer expert assistance in emergency lighting scheme design, and clear, concise advice on product selection.

Our sales managers are able to assist you at your premises, and arrange for emergency lighting schemes to be prepared at our design office in Leeds.

Certified technical design

Central to emergency lighting is the technical design drawing. It defines luminaire positioning and spacing, drives the installation effort and provides the key control for commissioning and approval.

Our technical design team is on hand to prepare drawings for all types of emergency lighting system, to the latest relevant standards.

Not only can drawings be prepared, but we also offer certification of all emergency lighting systems installed to our drawings, for added confidence and peace of mind.

Introduction

During building construction or refurbishment, the focus for emergency lighting shifts from planning and design, to delivery and installation.

At this point, project support and product availability become crucial.

Here, choosing an emergency lighting partner with the capability to deliver becomes a critical factor.

Emergi-Lite has many years' experience of supporting emergency lighting projects, backed by friendly service, technical expertise and our continual drive towards new product innovation.

Our solutions are designed and engineered for optimum performance, with our customer service and technical teams ready to assist.

Construction engineers and installers are assured that orders can be easily placed, deliveries arrive promptly, and that any issues are resolved quickly to a satisfactory outcome.

Project support

Our project engineers and internal sales support teams are available to provide guidance on products and project updates/delivery schedules etc.

Call our sales helpline for advice and assistance.

Customer sales/technical advice line:

Tel: +44 (0) 113 281 0610 / 0600 Fax: +44 (0) 113 281 0611

Calls may be monitored to assist with sales training and our customer care programme.

Simple, timely product delivery

With emergency lighting being our core product we maintain healthy stock levels at our facility in Leeds, ready for delivery.

Emergi-Lite products are also available through our wholesale partners nationwide. We will be pleased to provide details of your local stockist.

Where products need to be exported, we can provide advice and support on your specific requirements.



Easy-to-install product range

Many of our products are engineered to a modular design format, which promotes straightforward, cost-effective installation and maintenance.

Modular design enables first-fix installation of the key wiring components with later connection of geartrays, diffusers and legends etc, for easy management and replacement of parts.

Emergency lighting commissioning

Emergency lighting systems must be commissioned following installation, prior to use.

Emergi-Lite can provide advice and assistance for commissioning self-contained emergency lighting systems.

Furthermore, Emergi-Lite's service team provides a commissioning service for our central addressable testing and central power supply systems, to ensure the installation meets with the necessary approvals.

Contact Emergi-Lite for more details.



Introduction manage

The purpose of an emergency lighting system is to protect and safeguard life.

Once commissioned and in operation, the emergency lighting system must function correctly throughout its lifetime and therefore requires ongoing management, maintenance and testing.

This need for testing and servicing is enforced by legislation, with both The Regulatory Reform (Fire Safety) Order 2005/Fire (Scotland) Act 2005 and The Work Place Directive 89/654 making reference to proper maintenance of emergency lighting systems.

Any faults found need to be rectified as quickly as possible.

Investment in emergency lighting is an investment for the long term. For many building owners/occupiers, who have legal responsibility for these systems, maintenance, testing and access to replacement parts are of paramount importance.

With this in mind, it's clear to see that maintaining the partnership with your emergency lighting supplier, even after commissioning, is highly important.

At Emergi-Lite, we continue to support our customers after installation, with our complete and comprehensive after-sales service.

Maintenance and servicing

Our team of qualified and experienced service engineers is available to service emergency lighting systems, to ensure full working order in line with appropriate British Standards. Recommended spares only are used.

Term maintenance contracts are available. Contact our service team today to discuss your maintenance needs.



System testing & upgrades

Owner/occupiers are legally obliged to test and maintain emergency lighting to BS 5266-1 and -8 (Simplified Testing Regime EN 50172).

Emergi-Lite manufactures a range of testing solutions for self-contained emergency lighting - Self-Test, IR2 and Naveo addressable testing - to accommodate all levels of testing requirement.

These testing solutions provide the essential tool to assist owner/occupiers with ongoing monthly and yearly testing of emergency lighting systems.

See pages 72 - 78 for more details of our current testing solutions, or contact Emergi-Lite direct.

Emergi-Lite testing solutions



Each luminaire includes an in-built test facility with internal timer for programmed testing.



Luminaire tests are initiated via remote control, eliminating the need for costly wiring installation.



Each luminaire is coded with an electronic address and tests can be implemented over the internet. Records are held digitally in a secure remote server, with cloudbased access for PC's, laptops, and mobile devices.





Renewal and refurbishment completes the emergency lighting life-cycle.

Inevitably, all emergency lighting systems require renewal, as new products develop, standards change, and the ongoing cost of maintaining the current system becomes excessive.

At this point our products and services continue to play a major part.

In addition to keeping you up-to-date with new industry developments, our sales and technical teams are happy to review existing plans and specifications to advise on new and better product options.

Our customer services teams are on hand for ordering new luminaires and replacement parts.

Emergency lighting seminars

CPD-Accredited Training Course – Emergency lighting, testing and monitoring

Our CPD-accredited training course is designed to ensure you're always kept up-to-date with the latest emergency lighting requirements, regulations and standards.

This fully interactive training course is available to consultants, specifiers, installers, facilities managers and other parties who are looking to gain an in-depth understanding of emergency lighting legislative and testing requirements.

The course details the correct procedures for testing and monitoring all emergency lighting, in accordance with British Standards, Codes of Practice and current Working Directives, along with the methodologies best used to maximise effectiveness and efficiency of your installations.

Contact Emergi-Lite for further details.

Product development & recycling

Emergi-Lite products are designed with the future in mind.

Our focus on new product development ensures we're always in a strong position to deliver new innovations into the emergency lighting marketplace.

Our products are manufactured using sustainable, environmentally friendly materials and many now benefit from modular construction and LED technology, promoting longer lifetimes and lower recycling demand.

In addition, since we're a member of Lumicom, recycling of our luminaires is a quick and easy process (see www.lumicom.com).

Emergi-Lite also has battery recycling registration to meet the requirements of the Battery Directive (Battery Producer registration number BPRN00373).















































Serenga: altogether a better approach to emergency lighting

Serenga is a modular LED based emergency lighting system, combining a versatile range of exit signs with high specification downlighters to provide a complete solution across the design scheme.

The Serenga system has been designed to deliver the optimum solution for emergency lighting, at all stages of the construction cycle - from initial project planning, through to installation, maintenance and testing.

Why choose Serenga?

Serenga is the smart choice for emergency lighting. It delivers more than any other comparable emergency lighting solution:

LED technology for long-life performance

LEDs are highly energy efficient with low ongoing maintenance. Serenga delivers significant energy savings compared to 8 Watt fluorescents, with an expected lamp life of over 5 years.

Modular design for flexibility

Serenga modular design principles permit a high level of flexibility during planning and installation, with easy assembly and disassembly of parts.

A variety of exit sign combinations is available through selection of four simple components, supported by a range of modular, first-fix downlighters for emergency illumination.

Optimised light distribution

Serenga products are specifically designed to deliver optimised light distribution across escape routes and open areas. Even Serenga Escape 4 LED exit signs further increase on the already exceptional spacing provided by the LED downlighters.









Enhanced functionality for added value

Serenga units can provide night lighting to cut energy costs and for security, e.g. to deter theft at schools, shops and businesses etc. Low level night lighting assists security patrols, or night workers in hospitals, care homes etc to carry out their duties.

Dimming controls can be linked to standard Serenga units to permit LEDs to dim in normal operation, ideal for theatres, cinemas, restaurants etc.

Lower overall cost of ownership

Emergency lighting systems operate for many years, but require regular testing and maintenance. Every system has an ongoing cost, with buyers aware that total cost of ownership is a major consideration.

With low energy, low maintenance LED technology, Serenga easily surpasses traditional 8 Watt fluorescents in creating savings over the lifetime of the system.









Serenga: the complete emergency lighting solution

Serenga offers the complete, modern and innovative solution to the needs of emergency lighting specifiers and users.

All key requirements have been considered. Open area, escape route and exit sign luminaires are readily available, all providing superb soft illumination via high brightness LEDs.

Consultants, architects, specifiers, installers and building managers are therefore assured that Serenga is the right choice for reliable, cost effective emergency lighting.

The reference chart below establishes clearly how choosing Serenga benefits all parties involved in the emergency lighting life-cycle.

Serenga Escape exit signs

Serenga Sun-Lite

Planning

- Enhanced modular design
- Project-wide application
- Comprehensive product range
- Multiple mounting options
- Exit legend kit included
- Optimised light distribution
- Exit signs with 4 LEDs can be used in spacing calculations
- Enhanced functionality night/security lighting
- Dimmable lighting option

















Installation

- Rapid installation via first-fix modular bases
- Solutions for solid and suspended ceilings
- Multiple mounting options for LED exit signs with no separate bracket required
- Design flexibility through easy replacement of legend kits
- Clear installation instructions















Management

- In-built intelligent Self-Test assists maintenance
- Central testing variants available
- LED promotes low energy/maintenance costs
- Long-life LED (over 5 years)
- Easy modular replacement of parts
- Low overall cost of ownership with significant savings compared to 8 Watt T5 FL
- 4 Year warranty
- As low energy night lighting Serenga promotes better energy conservation















Renewal

- Straightforward disassembly of parts
- Sustainable, environmentally friendly materials
- Disposal via Lumicom scheme















For Serenga Escape exit signs see pages 12 - 16.

For Serenga downlighters see pages 17 - 23.




Serenga delivers value in installation and over the long term

The illustrations below compare use of Serenga exit signs and downlighters versus use of mains converted downlighters and 8 Watt exit signs, along a corridor approximately 38 metres in length.

As can clearly be seen, Serenga achieves the lux requirement for escape routes using much fewer luminaires, leading to significant savings.



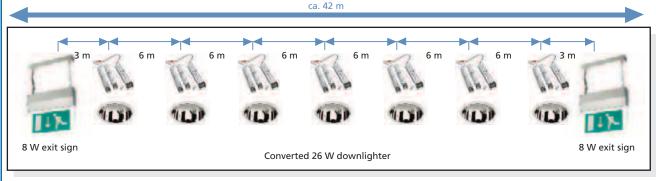





How much will you save?

The example shown outlines the estimated comparable cost saving between a Serenga LED and converted luminaire installation, over a 38 m escape route.

Calculation based on a 12 year installation.

Data based on nominal figures 2010.

Individual cost items may vary over time and the example is for guidance only.

For specific project cost comparisons please contact Emergi-Lite sales department.

Total savings over 60% for the lifetime of the system





Serenga Escape exit signs

Serenga Escape is a high specification, practical LED based emergency exit sign system.

Contemporary in design, Serenga Escape is ideal for modern commercial and public sector settings, such as offices, schools, shops and hotels.

Robust in construction, the system performs equally well in more demanding environments, including light industrial units and storage facilities.

Serenga Escape benefits from modular construction principles, promoting maximum flexibility at all points in the emergency lighting life-cycle, and offering tremendous scope to designers, installers and building users alike.

Flexible design

The high level of versatility in application makes Serenga Escape stand out from the crowd.

A number of design combinations are possible from four easy-to-assemble product components - the control assembly, smart-frame, legend panel and mounting accessory.

Simply put, designers and specifiers now have the opportunity to choose an exit sign to match all their interior design considerations.

In addition, two exit sign variants are available, a 2 LED exit sign, and an enhanced 4 LED exit sign with integral downlighters, enabling designers to include Serenga Escape luminaires in emergency lighting illuminance calculations.

Key benefits of Serenga Escape:

- Low cost, low energy LED based solution
- Four components, multiple combinations
- Modular design for maximum flexibility
- Interchangeable components readily assemble to first-fix principles
- 4 LED version provides additional emergency lighting
- Intelligent Self-Test included as standard
- Central addressable test versions available
- Dimmable versions available for standard exit signs (contact Emergi-Lite for details)



Flexible installation

All components are interchangeable and readily assemble to a first-fix principle.

The unique SmartLocker® feature of the electronic control module makes it possible to secure the control module and smart-frame to the first-fix plate with a simple 'locate, click and fit' action.

Legend panels clip-fit into place, so are easily replaceable without changing the entire unit.

Low cost, low maintenance

LED technology is renowned for being the energy saving, environmentally friendly alternative to traditional fluorescent emergency lighting.

Serenga Escape is no exception.

The LED light source and electronics have been specifically designed to promote a long lifespan with low energy consumption, ideal in these energy conscious times.

By choosing Serenga LED, customers benefit from significantly lower power consumption than traditional fluorescents, with a maintenance-free lamp, and battery life expectancy in excess of 4 years.

Integrated self-testing as standard

Manual testing of emergency lighting can be highly disruptive to everyday business - so why choose a system which requires it?


Serenga Escape makes emergency lighting testing easy.


Automatic Self-Test is included as standard, with the electronics, LEDs and battery operation (self-contained) continuously monitored.

Enhanced, addressable test versions are also available for larger installations, to better manage the ongoing testing requirement in these premises.




Order Code Description SER-M3-003 Self-contained SER-230-003 Slave 230 V SER-230LTC-003 Slave 230 V with integral LTC For testing and dimmable control assemblies, please contact Emergi-Lite.

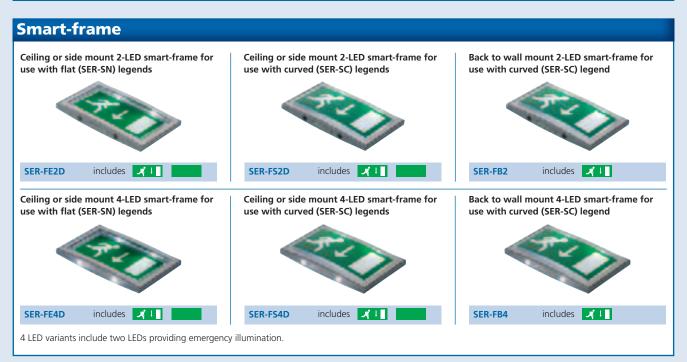

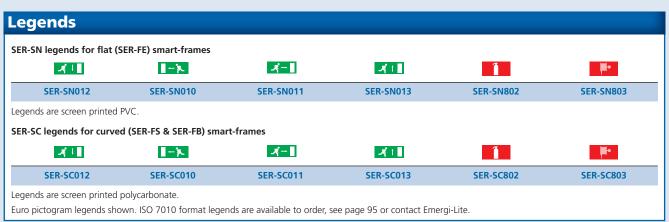

Accessories			
Order Code	Description		
SER-BZKIT	Recessing kit		
SER-RKIT150	Tube suspension kit (0.15 m)		
SER-RKIT300	Tube suspension kit (0.3 m)		
SER-RKIT500	Tube suspension kit (0.5 m)		
SER-RKIT1000	Tube suspension kit (1 m)		

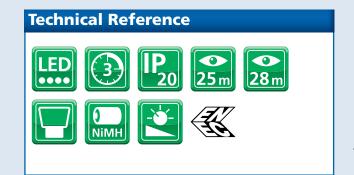





Exit sign with flat legend.

- 2 LED exit sign or 4 LED exit sign with downlighters
- Easy to fit modular assembly
- High impact polycarbonate body with aluminium trim
- Intelligent Self-Test included as standard
- Two surface mount orientations
- Designed and manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order control assembly, smart-frame, legend and mounting kit (if required) separately















Control assembly							
Order Code	Input Voltage	Operation / Duration (hrs)	Recharge Period	Environment	Weight		
SER-M3-003	220 - 240 Vac, 50 Hz	M3	24 hours	5 - 25 °C	0.8 kg		
SER-230-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		
SER-230LTC-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		


For testing and dimmable control assemblies, please contact Emergi-Lite.

Smart-frame								
Order Code	Lamp Type	Power Consumption Self-contained	Power Consumption Slave	Lamp Output*	Weight	Includes Legend		
SER-FE2D	2 x 1 W LED	60 mA	30 mA	-	0.9 kg	AT .		
SER-FE4D	4 x 1 W LED	70 mA	60 mA	27 lumens	0.9 kg	メリ		

Legends					
₹ ↓	 - *	<i>≯</i> -∎	₹ ↑		
SER-SN012	SER-SN010	SER-SN011	SER-SN013	SER-SN802	SER-SN803

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions



Accessories

Order Code	Description
SER-BZKIT	Recessing kit
SER-RKIT150	Tube suspension kit (0.15 m)
SER-RKIT300	Tube suspension kit (0.3 m)
SER-RKIT500	Tube suspension kit (0.5 m)
SER-RKIT1000	Tube suspension kit (1 m)

^{*} Total output from 2 lower LEDs through lenses.

For Serenga Escape 4 LED spacing data, see page 85.

For accessory drawings, see page 90.

For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.





Exit sign with curved legend.

- 2 LED exit sign or 4 LED exit sign with downlighters
- Easy to fit modular assembly
- High impact polycarbonate body with aluminium trim
- Intelligent Self-Test included as standard
- Two surface mount orientations
- Designed and manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order control assembly, smart-frame, legend and mounting kit (if required) separately

















Control assembly							
Order Code	Input Voltage	Operation / Duration (hrs)	Recharge Period	Environment	Weight		
SER-M3-003	220 - 240 Vac, 50 Hz	M3	24 hours	5 - 25 °C	0.8 kg		
SER-230-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		
SER-230LTC-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		

For testing and dimmable control assemblies, please contact Emergi-Lite.

Smart-frame							
Order Code	Lamp Type	Power Consumption Self-contained	Power Consumption Slave	Lamp Output*	Weight	Includes Legend	
SER-FS2D	2 x 1 W LED	60 mA	30 mA	-	0.9 kg	31	
SER-FS4D	4 x 1 W LED	70 mA	60 mA	27 lumens	0.9 kg	メ↓■	

Legends					
⊀ ↓■	■- *	⋠ −∎	⊀ +∎	1	ļml•
SER-SC012	SER-SC010	SER-SC011	SER-SC013	SER-SC802	SER-SC803

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories Order Code Description


Order Code	Description
SER-BZKIT	Recessing kit
SER-RKIT150	Tube suspension kit (0.15 m)
SER-RKIT300	Tube suspension kit (0.3 m)
SER-RKIT500	Tube suspension kit (0.5 m)
SER-RKIT1000	Tube suspension kit (1 m)

^{*} Total output from 2 lower LEDs through lenses.

For Serenga Escape 4 LED spacing data, see page 85. For accessory drawings, see page 90.

For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

Dimensions









Back-lit exit sign with curved legend.

- 2 LED exit sign or 4 LED exit sign with downlighters
- Easy to fit modular assembly
- High impact polycarbonate body with aluminium trim
- Intelligent Self-Test included as standard
- Designed and manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order control assembly, smart-frame, and legend separately















Control assembly							
Order Code	Input Voltage	Operation / Duration (hrs)	Recharge Period	Environment	Weight		
SER-M3-003	220 - 240 Vac, 50 Hz	M3	24 hours	5 - 25 °C	0.8 kg		
SER-230-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		
SER-230LTC-003	85 - 240 Vac, 50/60 Hz	230 V	-	5 - 40 °C	0.8 kg		


For testing and dimmable control assemblies, please contact Emergi-Lite.

Smart-frame							
Order Code	Lamp Type	Power Consumption Self-contained	Power Consumption Slave	Lamp Output*	Weight	Includes Legend	
SER-FB2	2 x 1 W LED	60 mA	30 mA	-	0.9 kg	₹ ↓	
SER-FB4	4 x 1 W LED	70 mA	60 mA	27 lumens	0.9 kg	₹ ↓■	

L	.egends					
	₹ ↓	 - X	⋠ −∎	ા 1 ■		
	SER-SC012	SER-SC010	SER-SC011	SER-SC013	SER-SC802	SER-SC803

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions



For Serenga Escape 4 LED spacing data, see page 85. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.



^{*} Total output from 2 lower LEDs through lenses



Serenga Sun-Lite LED: performance, power & precision

Serenga Sun-Lite offer a tremendous opportunity to everyone looking to add LED based emergency lighting to the design scheme.

LED light sources provide considerable value through minimal maintenance, long life and low operating cost, promoting significant cost and energy savings versus converted downlighters or 8 Watt fluorescents.

Complementing fully our Serenga Escape exit signs, Serenga Sun-Lite provide emergency lighting coverage across escape routes and open areas, as well as objectspecific spotlighting. Engineered with specific diffusers or reflector arrangements, optimum light dispersal is achieved for every application.

Both fully recessed and low-profile surface mounted units are available, making Serenga the comprehensive solution for delivering high output, low energy emergency lighting across the entire design scheme.

Advantages at every step:

- High power, high efficiency LED light sources
- LED long life expectancy over 5 years
- Optimised light distribution
- 5 Lux spotlight capability
- Minimal intrusion into building design
- Modular, first-fix installation
- Low energy night & security lighting
- Intelligent Self-Test functionality included
- Dimmable option available
- Excellent alternative to converted downlighters and 8 Watt fluorescents






Serenga Sun-Lite surface mounted **Escape route Open area Order Code** Description Colour **Order Code** Description Colour SER-SEM3-11 Self-contained, M3 SER-SAM3-11 Self-contained, M3 SER-SEM3-33 Self-contained, M3 SER-SAM3-33 Self-contained, M3 SER-SEM3-22 Self-contained, M3 SER-SAM3-22 Self-contained, M3 SER-SE230-11 Slave, 230 V SER-SA230-11 Slave, 230 V SER-SE230-33 Slave, 230 V SER-SA230-33 Slave, 230 V SER-SE230-22 Slave, 230 V SER-SA230-22 Slave, 230 V SER-SE230LTC-11 Slave, 230 V inc. LTC SER-SA230LTC-11 Slave, 230 V inc. LTC SER-SE230LTC-33 Slave, 230 V inc. LTC SER-SA230LTC-33 Slave, 230 V inc. LTC SER-SE230LTC-22 Slave, 230 V inc. LTC SER-SA230LTC-22 Slave, 230 V inc. LTC For testing and dimmable downlighter options, please contact Emergi-Lite.

Escape route			Open area			Spotlight			
Order Code	Description	Colour	Order Code	Description	Colour	Order Code	Description	Colour	
SER-DW-RM3	Self-contained, M3		SER-DA-RM3	Self-contained, M3		SER-DS-RM3	Self-contained, M3		
SER-DWS-RM3	Self-contained, M3		SER-DAS-RM3	Self-contained, M3		SER-DSS-RM3	Self-contained, M3		
SER-DWB-RM3	Self-contained, M3		SER-DAB-RM3	Self-contained, M3		SER-DSB-RM3	Self-contained, M3		
SER-DW-R230	Slave, 230 V		SER-DA-R230	Slave, 230 V		SER-DS-R230	Slave, 230 V		
SER-DWS-R230	Slave, 230 V		SER-DAS-R230	Slave, 230 V		SER-DSS-R230	Slave, 230 V		
SER-DWB-R230	Slave, 230 V		SER-DAB-R230	Slave, 230 V		SER-DSB-R230	Slave, 230 V		
SER-DW-R230LTC	Slave, 230 V, inc LTC		SER-DA-R230LTC	Slave, 230 V, inc LTC		SER-DS-R230LTC	Slave, 230 V, inc LTC		
SER-DWS-R230LTC	Slave, 230 V, inc LTC		SER-DAS-R230LTC	Slave, 230 V, inc LTC		SER-DSS-R230LTC	Slave, 230 V, inc LTC		
SER-DWB-R230LTC	Slave, 230 V, inc LTC		SER-DAB-R230LTC	Slave, 230 V, inc LTC		SER-DSB-R230LTC	Slave, 230 V, inc LTC		



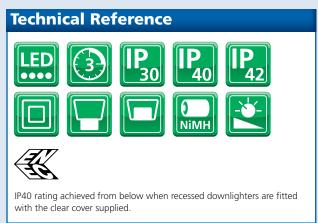





Serenga Sun-Lite surface mounted escape route.

- Ideal for high specification projects
- Excellent alternative to converted downlighters and 8 Watt fluorescent luminaires
- Light optimised reflector
- Ingress rated to IP42 when ceiling mounted
- Intelligent Self-Test as standard
- Polycarbonate, first-fix enclosure
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands






















Surface r	mounted unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Colour	Environment	Weight
SER-SEM3-11	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	64 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SEM3-33	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	64 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SEM3-22	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	64 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SE230-11	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SE230-33	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SE230-22	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SE230LTC-11	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.9 kg
SER-SE230LTC-33	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.9 kg
SER-SE230LTC-22	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	65 lumens	230 V	-		5 - 35 °C	1.9 kg

For testing and dimmable downlighter options, please contact Emergi-Lite.

Dimensions

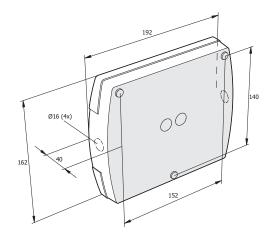

For Serenga Surface Mounted spacing data, see page 85. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.







Serenga Sun-Lite surface mounted open area.

- Ideal for high specification projects
- Excellent alternative to converted downlighters and 8 Watt fluorescent luminaires
- Light optimised octagonal reflector
- Ingress rated to IP42 when ceiling mounted
- Intelligent Self-Test as standard
- Polycarbonate, first-fix enclosure
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands









67 lumens

67 lumens



230 V

230 V







5 - 35 °C

5 - 35 °C

1.9 kg

1.9 kg



Surface r	nounted unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Colour	Environment	Weight
SER-SAM3-11	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	65 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SAM3-33	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	65 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SAM3-22	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	65 lumens	M3	24 hours		5 - 25 °C	2.0 kg
SER-SA230-11	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	67 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SA230-33	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	67 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SA230-22	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	50 mA	67 lumens	230 V	-		5 - 35 °C	1.8 kg
SER-SA230ITC-11	85 - 240 Vac 50/60 Hz	1 v 1 W/ LED	50 mA	67 lumans	23U \/			5 - 35 °C	1 Q ka

50 mA

50 mA

For testing and dimmable downlighter options, please contact Emergi-Lite.

1 x 1 W LED

1 x 1 W LED


85 - 240 Vac, 50/60 Hz

85 - 240 Vac, 50/60 Hz

Dimensions

SER-SA230LTC-33

SER-SA230LTC-22

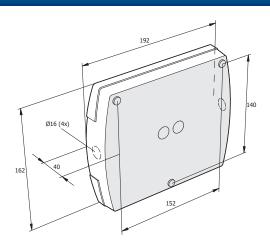

For Serenga Surface Mounted spacing data, see page 85. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.



Serenga Sun-Lite recessed escape route.

- Ideal for high specification projects
- Excellent alternative to converted downlighters and 8 Watt fluorescent luminaires
- Two angled LEDs in head unit with separate control module and battery
- Intelligent Self-Test as standard
- Polycarbonate downlighter and polyamide control module
- Optional clear clip-on IP40 cover included
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
















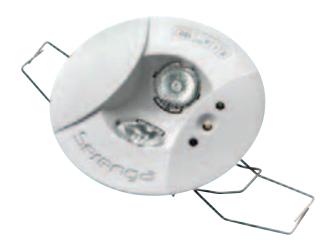





Recessed	unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output*	Operation / Duration (hrs)	Recharge Period	Colour	Environment	Weight
SER-DW-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	39 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DWS-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	39 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DWB-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	39 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DW-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DWS-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DWB-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DW-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DWS-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DWB-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	39 lumens	230 V	-		0 - 40 °C	1.1 kg

For testing and dimmable downlighter options, please contact Emergi-Lite.


Accessories

Order Code	Description
SER-DBZ5-AL	Trim bezel aluminium (pack of 5)
SER-DBZ5-BR	Trim bezel brass (pack of 5)
SER-DBZ5-SI	Trim bezel silver (pack of 5)
SER-DBZ5-WH	Trim bezel white (pack of 5)

^{*} Total output from 2 LEDs through lenses.

For Serenga Sun-Lite spacing data, see page 85. For slave control module drawing, see page 91. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.


Dimensions

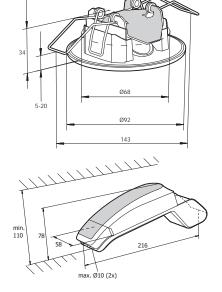









- Ideal for high specification projects
- Excellent alternative to converted downlighters and 8 Watt fluorescent luminaires
- Two LEDs in head unit with separate control module and battery
- Intelligent Self-Test as standard
- Polycarbonate downlighter and polyamide control module
- Optional clear clip-on IP40 cover included
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
















Recessed	unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Colour	Environment	Weight
SER-DA-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	56 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DAS-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	56 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DAB-RM3	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	56 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DA-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DAS-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DAB-R230	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DA-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DAS-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DAB-R230LTC	85 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	56 lumens	230 V	-		0 - 40 °C	1.1 kg

For testing and dimmable downlighter options, please contact Emergi-Lite.

Dimensions

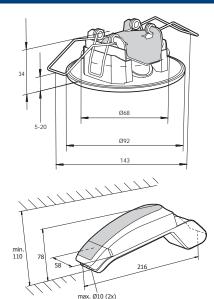

Accessories

Order Code	Description
SER-DBZ5-AL	Trim bezel aluminium (pack of 5)
SER-DBZ5-BR	Trim bezel brass (pack of 5)
SER-DBZ5-SI	Trim bezel silver (pack of 5)
SER-DBZ5-WH	Trim bezel white (pack of 5)

For Serenga Sun-Lite spacing data, see page 85.
For slave control module drawing, see page 91.
For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.



Serenga Sun-Lite recessed spotlight.

- Ideal for high specification projects
- Excellent alternative to converted downlighters and 8 Watt fluorescent luminaires
- Angled LED in head unit with separate control module and battery
- Intelligent Self-Test as standard
- Polycarbonate downlighter and polyamide control module
- Optional clear clip-on IP40 cover included
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands





















Ouder Code	Innut	Lower	Davier	Lown	Onematica /	Doobouwa	Colour	Environment	Malala
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output*	Operation / Duration (hrs)	Recharge Period	Colour	Environment	vveignt
SER-DS-RM3	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	20 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DSS-RM3	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	20 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DSB-RM3	220 - 240 Vac, 50 Hz	1 x 1 W LED	40 mA	20 lumens	M3	24 hours		0 - 25 °C	1.1 kg
SER-DS-R230	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DSS-R230	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DSB-R230	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.0 kg
SER-DS-R230LTC	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DSS-R230LTC	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.1 kg
SER-DSB-R230LTC	85 - 240 Vac, 50/60 Hz	1 x 1 W LED	20 mA	20 lumens	230 V	-		0 - 40 °C	1.1 kg

For testing and dimmable downlighter options, please contact Emergi-Lite.


Accessories

Order Code	Description
SER-DBZ5-AL	Trim bezel aluminium (pack of 5)
SER-DBZ5-BR	Trim bezel brass (pack of 5)
SER-DBZ5-SI	Trim bezel silver (pack of 5)
SER-DBZ5-WH	Trim bezel white (pack of 5)

^{*} Total output from LED through a lens.

For Serenga Sun-Lite spacing data, see page 85. For slave control module drawing, see page 91 For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

Dimensions

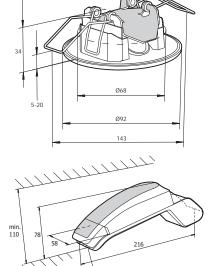

max. Ø10 (2x)









Modern in design, modular in construction

Horizon is a versatile, high performance emergency lighting solution designed to meet the demands of today's marketplace.

Horizon delivers tremendous advantages to all parties involved with emergency lighting, from initial project design through installation to ongoing ownership and maintenance.

Comprising directional signage and luminaires for open area and escape route lighting, Horizon offers a comprehensive, consistent solution for the entire emergency lighting scheme.

With Horizon, low energy LED based exit signs are matched with high output fluorescent luminaires to provide a cost efficient yet powerful emergency lighting system. This highly effective approach delivers optimal light distribution, so fewer luminaires are required, with low ongoing maintenance costs.

Both recessed and surface mounted units are available, for modern suspended ceilings and traditional solid walls, making the most of every location.

Straightforward, modular design ensures rapid installation, with the first-fix base fitted at an early construction phase, and the geartray, light diffuser or legend panel installed later as the building is finalised.

Modular design and construction offers specifiers and building owners opportunity to revise emergency escape route plans at later project stages, if required, as building use and occupants' needs become clearer.











Horizon - advantages at every step:

Whether you're designing, installing, maintaining or managing emergency lighting, Horizon has clear advantages over the competition, at every step in the process:

At planning:

- Modern styling & aesthetics make Horizon ideal for inclusion in high profile projects
- High versatility, with surface mounting, recessing or mounting via a range of accessories ensures Horizon comprehensively covers project needs
- Excellent light distribution and spacing promote a high level of efficiency when locating luminaires
- Designed to meet BS EN standards for excellent performance over time

During installation:

- Modular construction with separate replaceable geartray for simple, secure installation
- 3 Year product warranty for confidence and added peace of mind

In the managed phase:

- LED based ceiling & back mount exit signs for energy conservation in maintained operations
- Maintained LED based signs can be used as low cost security lighting

On renewal:

- Modular design for rapid replacement of parts
- Retrofit existing fluorescent Horizon exit signs with LED geartray for reduced energy demand and longer lamp-life





Horizon luminaires have been specifically engineered with enhanced light optics to deliver market-leading spacing compared to standard fluorescents of similar lamp size.


Through developing luminaires with increased spacing, Emergi-Lite is able to deliver key cost benefits for both installation and ongoing maintenance of emergency lighting, since fewer units are required in the system.

With emergency lighting a long term investment, it is clear that total cost of ownership, including installation, maintenance, battery replacement etc becomes a more important factor than the initial expense on luminaires.

Horizon's impressive spacing, and low maintenance LED exit signs, maximise the potential cost benefits to the user, thereby significantly reducing total cost of ownership.

The following chart highlights the savings achieved by specifying and installing Horizon versus a standard 8 Watt fluorescent luminaire solution.



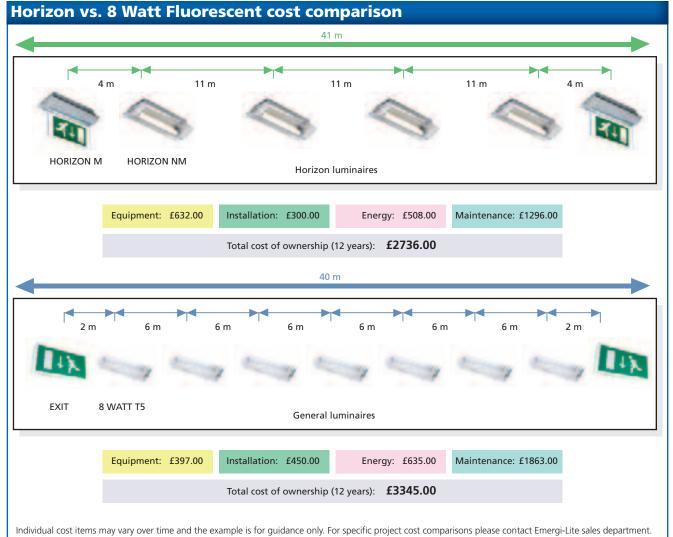



Order Code	Description
OH23161	Self-contained, NM3, surface mount
OH33161	Self-contained, M3, surface mount
OH13161HF	Slave, 230 V, surface mount
OH13161LTC	Slave, 230 V, inc. LTC, surface mount
OZ23161	Self-contained, NM3, recessed
OZ33161	Self-contained, M3, recessed
OZ13161HF	Slave 230 V, recessed
OZ13161LTC	Slave, 230 V, inc. LTC, recessed

Exit signs



Back-lit LED exit sign

Order Code	Description
OH3L261	Self-contained, M3, surface mount
OH1L261HF	Slave, 230 V, surface mount
OZ3L261	Self-contained, M3, recessed
OZ1L261HF	Slave 230 V, recessed

OZ1L261HF	Slave 230 V, recessed
Order Code	Description
XE02H	XII
XE03H	1-%
XE06H	X-1
XE05H	3 1
XLF802H	1
XLF803H	III•

Legends are screen printed with clip-fit aluminium frame.

Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.



Edge-lit LED exit sign

Order Code	Description
OHD3LS61	Self-contained, M3, surface mount
OHD1LS61HF	Slave, 230 V, surface mount
OZD3LS61	Self-contained, M3, recessed
OZD1LS61HF	Slave 230 V, recessed

Order Code Description

0.40. 0040	
XE20HS	X11
XE30HS	1-7-
XE60HS	≾- ■
XE50HS	X 11
XE36HD	-> x-
XLF802HS	1
XLF803HS	P

Legends are screen printed with slotted aluminium frame.

Order Code	Description			
OH/BCM	Ceiling bracket, vertical mount, for back-lit sign			
OH/BWM	Wall bracket for edge-lit sign/luminaire			
OH/WG	Protective wire guard			

Technical Reference						
LED TO BE TO THE PART OF THE P						
25 m NiCaD	IP20 = recessed IP40 = surface mount					





Back-lit LED exit sign.

- Sophisticated design, ideal for contemporary commercial projects
- Choice of IP40 surface mount (OH) or IP20 recessed (OZ) installation with LED lamp
- Shaped diffuser and contoured reflector
- First-fix aluminium base with white polycarbonate luminaire body
- Clip-on legend panel
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order luminaire and legend separately























LED base unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight	
OH3L261	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	1.7 kg	
OH1L261HF	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.5 kg	
OZ3L261	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	1.7 kg	
OZ1L261HF	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.5 kg	

Legends


* 1	1-1	⊀ -∎	⊀ ↑■	1	imi•
XE02H	XE03H	XE06H	XE05H	XLF802H	XLF803H


Legends are screen printed with clip-fit aluminium frame. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories

Order Code	Description
OH/BCM	Ceiling bracket, vertical mount, for back-lit sign
OH/WG	Protective wire guard

Dimensions





For accessory drawings, see pages 91 - 92. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.





Edge-lit LED exit sign.

- Sophisticated design, ideal for contemporary commercial projects
- Choice of IP40 surface mount (OHD) or IP20 recessed (OZD) installation with LED lamp
- Shaped diffuser and contoured reflector
- First-fix aluminium base with white polycarbonate luminaire body
- Legend panel with slotted aluminium frame
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order luminaire and legend separately























e.	L	E	D	ľ
Į	•		•	
















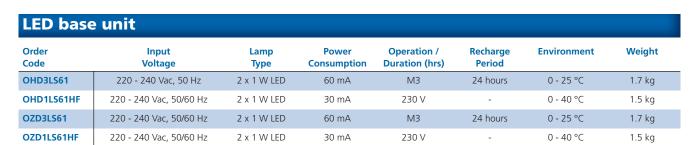


Lege	Legends							
Single sided	⋠ ↓▮	 - %	⋠ −∎	メ ↑▮		₩₩-	Double sided	 -
	XE20HS	XE30HS	XE60HS	XE50HS	XLF802HS	XLF803HS		XE36HD

Legends are screen printed with slotted aluminium frame. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.


Accessories

Order Code	Description
OH/BWM	Wall bracket for edge-lit sign/luminaire

Dimensions



For accessory drawings, see pages 91 - 92. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.









High power open area luminaire.

- Sophisticated design, ideal for contemporary commercial projects
- Choice of IP40 surface mount (OH) or IP20 recessed (OZ) installation with fluorescent lamp
- Shaped diffuser and contoured reflector for exceptional light distribution
- First-fix aluminium base with white polycarbonate luminaire body and clear diffuser
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK, and the Netherlands





















Luminai	re							
Order Code	Input Voltage	Lamp Type	Lamp Output	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight
OH23161	220 - 240 Vac, 50/60 Hz	8 W T5	156 lumens	20 mA	NM3	24 hours	0 - 25 °C	1.5 kg
OH33161	220 - 240 Vac, 50/60 Hz	8 W T5	156 lumens	70 mA	M3	24 hours	0 - 25 °C	1.7 kg
OH13161HF	220 - 240 Vac, 50/60 Hz	8 W T5	253 lumens	70 mA	230 V	-	0 - 40 °C	1.3 kg
OH13161LTC	220 - 240 Vac, 50/60 Hz	8 W T5	253 lumens	70 mA	230 V	-	0 - 40 °C	1.4 kg
OZ23161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	20 mA	NM3	24 hours	0 - 25 °C	1.5 kg
OZ33161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	70 mA	M3	24 hours	0 - 25 °C	1.7 kg
OZ13161HF	220 - 240 Vac, 50/60 Hz	8 W T5	253 lumens	70 mA	230 V	-	0 - 40 °C	1.3 kg
OZ13161LTC	220 - 240 Vac, 50/60 Hz	8 W T5	253 lumens	70 mA	230 V	-	0 - 40 °C	1.4 kg

Accessories

Order Code	Description
OH/BWM	Wall bracket for edge-lit sign/luminaire
OH/WG	Protective wire guard

Dimensions





For Horizon spacing data, see page 86. For accessory drawings, see pages 92. For further information on Naveo and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

other general projects requiring heavy duty

emergency lighting





High performance, high output emergency lighting, for heavy duty use

Durability and high performance mark the Aqualux range of exit signs and luminaires.

Rated to IK10, and certified to both IP65 and IP67, Aqualux is the ideal choice where heavy duty emergency lighting is required, and excels in high bay warehouses, storage facilities, car parks, sports halls and stadia etc.

Being both impact and weather resistant, Aqualux is also well suited to use in schools, hospitals, shopping malls and other commercial environments requiring a robust emergency lighting solution.

Aqualux offers a complete and comprehensive solution with low energy LED based exit signs complemented by high output luminaires.

Two luminaire lamp options, 8 W T5 or high power 11 W PL, are available for excellent spacings even at high ceiling heights, not only beating conventional fluorescents, but also outperforming twin spot tungsten halogen units.

All units combine with a range of mounting accessories, to ensure all location requirements are covered. IP65 rating ensures exterior emergency lighting can also be provided.


Additionally, specialist luminaire types are available, including a 'light sensor', and low temperature 'Freez-Lite' option. By using a light sensor, luminaires automatically illuminate at dusk, enabling Aqualux to operate as security lighting.

Aqualux 'Freez-Lite' operates down to minus 25°C, ideal for cold-stores, specialist winter sports venues and for general all-weather outdoor security lighting.











Aqualux - advantages at every step:

For designers, specifiers, installers and building owner/occupiers, Aqualux delivers more over the lifetime of the emergency lighting system:

At planning:

- High versatility, with range of mounting accessories for complete project coverage
- Specialist applications, such as security/night lighting and low temperature use make Aqualux viable for many diverse projects
- Excellent light distribution and spacing promote a high level of efficiency when locating luminaires
- Designed to meet BS EN standards and ENEC approved, for assured performance

During installation:

- Modular construction with separate replaceable geartray for straightforward, first-fix installation
- 3 Year product warranty for added peace of mind

In the managed phase:

- LED based exit signs for energy conservation in maintained operations
- Excellent luminaire spacing ensures fewer luminaires across the site, lowering maintenance and management costs
- Intelligent Self-Test included as standard

On renewal:

- Modular design for rapid replacement of parts
- Retrofit existing Aqualux fluorescent exit signs with LED geartray for reduced energy demand and longer lamp-life






Aqualux luminaires have been specifically designed to deliver exceptional light output and excellent spacings, even in areas with high ceilings, making Aqualux the sure choice for large scale open area emergency lighting projects.

Through developing luminaires with increased spacing, Emergi-Lite is able to deliver key cost benefits over the lifetime of the emergency lighting system.

Fewer luminaires reduces installation, ongoing maintenance and servicing costs, along with the eventual recycling requirement.


With emergency lighting a long term investment, this highly effective approach can have a significant positive impact on total cost of ownership of the system.

The following chart highlights the savings which can be achieved through specifying and installing Aqualux versus a twin spot tungsten halogen unit.

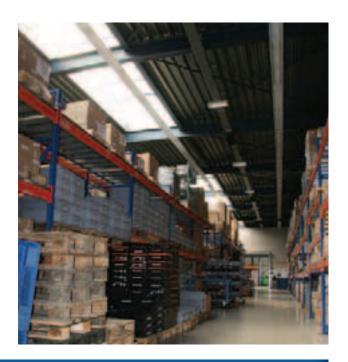

Aqualux vs. Twin Spot cost comparison

Comparison between Aqualux and Twin Spot unit, ceiling mounted at 6 m, to achieve open area requirement of 0.5 lux.

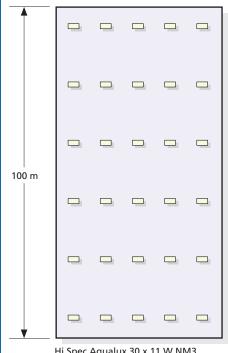

Hi Spec Aqualux 30 x 11 W NM3

50 m _

6 m



Twin spot 42 x (2 x 20 W NM3)





This shows a comparison between Aqualux high spec 11 W fluorescents and twin spot units arranged in a typical warehouse space. A complete open area scenario is used. For storage racks with aisles an alternative layout is needed.

Individual cost items may vary over time and the example is for quidance only. For specific project cost comparisons please contact Emergi-Lite sales department.





Luminaire





Standard Order Code	Freez-Lite Order Code	Description
OW23161	STF23161	Self-contained, NM3, 8 W T5
OW33161	STF33161	Self-contained, M3, 8 W T5
OW13161HF	STF13161HF	Slave, 230 V, 8 W T5
OW13161LTC	-	Slave, 230 V, inc. LTC, 8 W T5
OW26161	STF26161	Self-contained, NM3, 11 W PL
OW36161	STF36161	Self-contained, M3, 11 W PL
OW16161HF	STF16161HF	Slave, 230 V, 11 W PL
OW16161LTC	-	Slave, 230 V, in LTC, 11 W PL

LED based exit signs

Back-lit LED exit sign



Order Code	Description
OW3L261	Self-contained, M3
OW3L261LS	Self-contained, M3, inc light sensor
OW1L261HF	Slave, 230 V
OW1L261LTC	Slave, 230 V, inc LTC

Order Code	Description
XE02W	31
XE03W	■- ×
XE06W	≾ −■
XE05W	₹1
XLF802W	1
XLF803W	im-

Legends are screen printed and clip under diffuser.

Edge-lit LED exit sign



Order Code	Description
OW3L261	Self-contained, M3
OW3L261LS	Self-contained, M3, inc light sensor
OW1L261HF	Slave, 230 V
OW1L261LTC	Slave, 230 V, inc LTC
Accessory	
OW/DSC	Blank double sided diffuser

Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Order Code	Description
RSE2W	X11
RSE3W	-X
RSE6W	X-1
RSE5W	₹1
RSE2W/RSE2W	XII XII
RSE3W/RSE6W	- - - - - - - - - - - - - - - - - - -

Legends are self-adhesive, to attach to double sided diffuser.

Accessories				
Description				
Ceiling bracket, vertical mount				
Wall bracket, angled mount				
OW/BWM Wall mount end cantilever bracket				

Technical Reference				
[ED] = [P] [P] 65				
IK D 25 m NiCaD				



Back-lit LED exit sign.

- Robust contemporary design, ideal for offices, warehouses and storage facilities
- Attractive aluminium modular enclosure (certified to IP65 and IP67)
- Clear polycarbonate broad delivery diffuser
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Order luminaire and legend separately
- Manufactured in the Netherlands

























LED base unit									
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight		
OW3L261	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	2.2 kg		
OW3L261LS	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	2.3 kg		
OW1L261HF	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.8 kg		
OW1L261LTC	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.9 kg		


OW3L261LS includes light sensor.

Legends					_
⊀ ↓■	1-1	ズー	⊀ ↑■	1	
XE02W	XE03W	XE06W	XE05W	XLF802W	XLF803W


Legends are screen printed and clip under diffuser. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-

Accessories				
Order Code	Description			
OW/BCM	Ceiling bracket, vertical mount			
OW/BWA	Wall bracket, angled mount			

Dimensions



For accessory drawings, see page 92.







Edge-lit LED exit sign.

- Robust contemporary design, ideal for offices, warehouses and storage facilities
- Attractive aluminium modular enclosure (certified to IP65 and IP67)
- Clear polycarbonate broad delivery diffuser
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands
- Order luminaire, D-shaped diffuser and legend(s) separately
























LED base unit									
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight		
OW3L261	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	2.2 kg		
OW3L261LS	220 - 240 Vac, 50 Hz	2 x 1 W LED	60 mA	M3	24 hours	0 - 25 °C	2.3 kg		
OW1L261HF	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.8 kg		
OW1L261LTC	220 - 240 Vac, 50/60 Hz	2 x 1 W LED	30 mA	230 V	-	0 - 40 °C	1.9 kg		

OW3L261LS includes light sensor.

Leger	nds						
Single sided	X 1	 - %	⊀ -∎	⊰ † 1 ■	Double sided	 -	⊀ ↓ ■ ⊀ ↓ ■
	RSE2W	RSE3W	RSE6W	RSE5W		RSE3W/RSE6W	RSE2W/RSE2W

Legends are self-adhesive to be applied to double sided diffuser accessory (OW/DSC). Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions



Accessories	

Order Code	Description
OW/BWM	Wall mount end cantilever bracket
OW/DSC	Blank double sided diffuser

For accessory drawings, see page 92.



High power open area luminaire.

- Robust contemporary design, ideal for offices, warehouses and storage facilities
- Choice of 8 W or 11 W fluorescent lamps
- Attractive aluminium modular enclosure (certified to IP65 and IP67)
- Clear polycarbonate broad delivery diffuser
- Includes light sensor for overnight security lighting application
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands






















Luminaire								
Order Code	Input Voltage	Lamp Type	Lamp Output	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight
OW23161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	40 mA	NM3	24 hours	0 - 25 °C	2.0 kg
OW33161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	90 mA	M3	24 hours	0 - 25 °C	2.2 kg
OW13161HF	220 - 240 Vac, 50/60 Hz	8 W T5	303 lumens	70 mA	230 V	-	0 - 40 °C	1.8 kg
OW13161LTC	220 - 240 Vac, 50/60 Hz	8 W T5	303 lumens	70 mA	230 V	-	0 - 40 °C	1.9 kg
OW26161	220 - 240 Vac, 50 Hz	11 W PL	252 lumens	40 mA	NM3	24 hours	0 - 25 °C	2.0 kg
OW36161	220 - 240 Vac, 50 Hz	11 W PL	252 lumens	120 mA	M3	24 hours	0 - 25 °C	2.2 kg
OW16161HF	220 - 240 Vac, 50/60 Hz	11 W PL	675 lumens	100 mA	230 V	-	0 - 40 °C	1.8 kg
OW16161LTC	220 - 240 Vac, 50/60 Hz	11 W PL	675 lumens	120 mA	230 V	-	0 - 40 °C	1.9 kg

Accessories

Order Code	Description
OW/BCM	Ceiling bracket, vertical mount
OW/BWA	Wall bracket, angled mount
OW/BWM	Wall mount end cantilever bracket

For Aqualux spacing data, see page 86. For accessory drawings, see page 92.









High power open area luminaire.

- Robust contemporary design, ideal for cold-stores and freezer compartments
- Choice of 8 W or 11 W fluorescent lamps
- Attractive aluminium modular enclosure (certified to IP65 and IP67)
- Clear polycarbonate broad delivery diffuser
- Operates down to minus 25 °C
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the Netherlands






















Luminaire								
Order Code	Input Voltage	Lamp Type	Lamp Output	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight
STF23161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	230 mA	NM3	24 hours	-25 - +25 °C	2.0 kg
STF33161	220 - 240 Vac, 50 Hz	8 W T5	156 lumens	230 mA	M3	24 hours	-25 - +25 °C	2.2 kg
STF13161HF	220 - 240 Vac, 50/60 Hz	8 W T5	303 lumens	190 mA	230 V	-	-25 - +40 °C	1.8 kg
STF26161	220 - 240 Vac, 50 Hz	11 W PL	252 lumens	260 mA	NM3	24 hours	-25 - +25 °C	2.0 kg
STF36161	220 - 240 Vac, 50 Hz	11 W PL	252 lumens	260 mA	M3	24 hours	-25 - +25 °C	2.2 kg
STF16161HF	220 - 240 Vac, 50/60 Hz	11 W PL	675 lumens	220 mA	230 V	-	-25 - +40 °C	1.8 kg

Dimensions



Accessories

Order Code	Description
OW/BCM	Ceiling bracket, vertical mount
OW/BWA	Wall bracket, angled mount
OW/BWM	Wall mount end cantilever bracket

For Aqualux spacing data, see page 86. For accessory drawings, see page 92.











Practical emergency lighting begins with Previx

Previx offers a practical, combined emergency lighting and exit sign solution and is ideal for specification projects such as schools, offices, retail units, cafes, and small healthcare sites, e.g. GP's surgeries.

Previx has been designed specifically with practicality and simplicity in mind.

First of all Previx benefits from an easy-to-install firstfix base. By choosing Previx, contractors are assured of swift, ready installation with simple connection of the emergency lighting unit once the base is wired up.

Back-lit exit signage is achieved easily by clipping the legend directly on to the unit, whilst edge-lit signs are created using an accessory kit which includes all necessary components and simply clicks to fit into ceiling mounted luminaires.

All in all, in a few simple steps Previx is installed and ready for use.

For an end user, Previx offers an intelligent emergency lighting solution at a highly attractive price.

With its compact housing, minimal product height and option for recessing, Previx delivers discreet, professional emergency lighting whether installed above doorways or on to low ceilings. Self-Test is in-built as standard, ensuring periodic testing in line with BS 5266 with minimal disruption to daily activities. Simply check LED status indicators on the unit for effective lamp operation.

For even greater assurance, Previx is ENEC certified for product quality, and is supplied complete with a four year warranty on the emergency lighting unit, making it the perfect choice for long term safety.

In short, Previx delivers full emergency lighting integrity in a compact, manageable housing, ideal for day-to-day installations.



EMERGI-LITE



Back-lit LED exit sign.

- Ideal for use in commercial offices, hotels, public buildings, cafes and retail units etc
- Manufactured from high grade polycarbonate in white
- Straightforward installation, with first-fix base
- Suitable for surface mounting
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK





















LED base unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight	Includes Legend
PX3LS1	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.0 kg	
PX1LS1HF	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	0.9 kg	*
PX1LS1LTC	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	1.0 kg	4 1

Legends

⊀ +■	1- %	₹ -1	⊀ ↑■
XE02PX	XE03PX	XE06PX	XE05PX


Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories

Order Code	Description
BK XL	Protective wire guard
PX/BCM	Ceiling bracket, vertical mount
PX/BWM	Wall bracket, for flag sign mount
PX/LENS4	Set of 4 lenses (for enhanced spacing in general use)

For accessory drawings, see page 92.

For further information on Naveo emergency luminaire testing format, see pages 73 - 75 or contact Emergi-Lite.

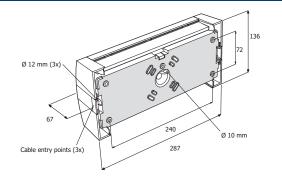





Edge-lit LED exit sign.

- Ideal for use in commercial offices, hotels, public buildings, cafes and retail units etc
- Manufactured from high grade polycarbonate in white
- Straightforward installation, with first-fix base
- Options for surface (PX) or recessed (PXR) mount
- Intelligent self-test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK
- Order LED base unit and double sided exit sign kit (PX/DSLKIT) separately






















LED bas	LED base unit							
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight	Includes Legend
PX3LS1	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.0 kg	* 1
PXR3LS1	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.4 kg	*
PX1LS1HF	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	0.9 kg	*
PX1LS1LTC	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	1.3 kg	*
PXR1LS1HF	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	0.9 kg	*
PXR1LS1LTC	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	230 V	-	0 - 40 °C	1.3 kg	₹ ↓


Legen	ds					
Single sided	戌 ↓■	1-12	⋠ −∎	<i>3</i> ;1■	Double sided	Ĭ -ネ ⊀- Ĭ
	XE02PX	XE03PX	XE06PX	XE05PX		XE03PX / XE06PX

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories

Order Code	Description
PX/DSLKIT	Double sided exit sign kit, includes

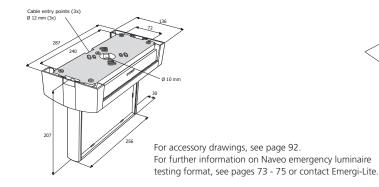







LED emergency luminaire.

- Ideal for use in commercial offices, hotels, public buildings, cafes and retail units etc
- Manufactured from high grade polycarbonate in white
- Straightforward installation, with first-fix base
- Options for surface (PX) or recessed (PXR) mount
- Increased spacing achieved with optional lens kit (PX/LENS4)
- Intelligent Self-Test as standard
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK




















LED lun	LED luminaire											
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight				
PX3LS1	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	147 lumens	M3	24 hours	0 - 25 °C	1.0 kg				
PXR3LS1	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	147 lumens	M3	24 hours	0 - 25 °C	1.4 kg				
PX1LS1HF	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	185 lumens	230 V	-	0 - 40 °C	0.9 kg				
PX1LS1LTC	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	185 lumens	230 V	-	0 - 40 °C	1.3 kg				
PXR1LS1HF	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	185 lumens	230 V	-	0 - 40 °C	0.9 kg				
PXR1LS1LTC	220 - 240 Vac, 50/60 Hz	1 W LED strip	30 mA	185 lumens	230 V	-	0 - 40 °C	1.3 kg				


Accessories


Order Code	Description
PX/LENS4	Set of 4 lenses

Dimensions

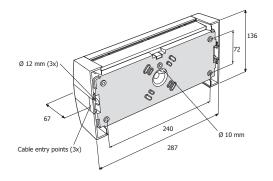

For Previx spacing data, please see page 87 For accessory drawings, see page 92. For further information on Naveo emergency luminaire testing format, see pages 73 - 75 or contact Emergi-Lite.

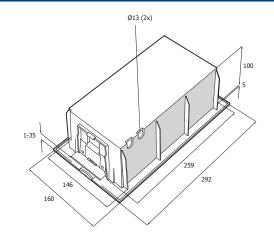

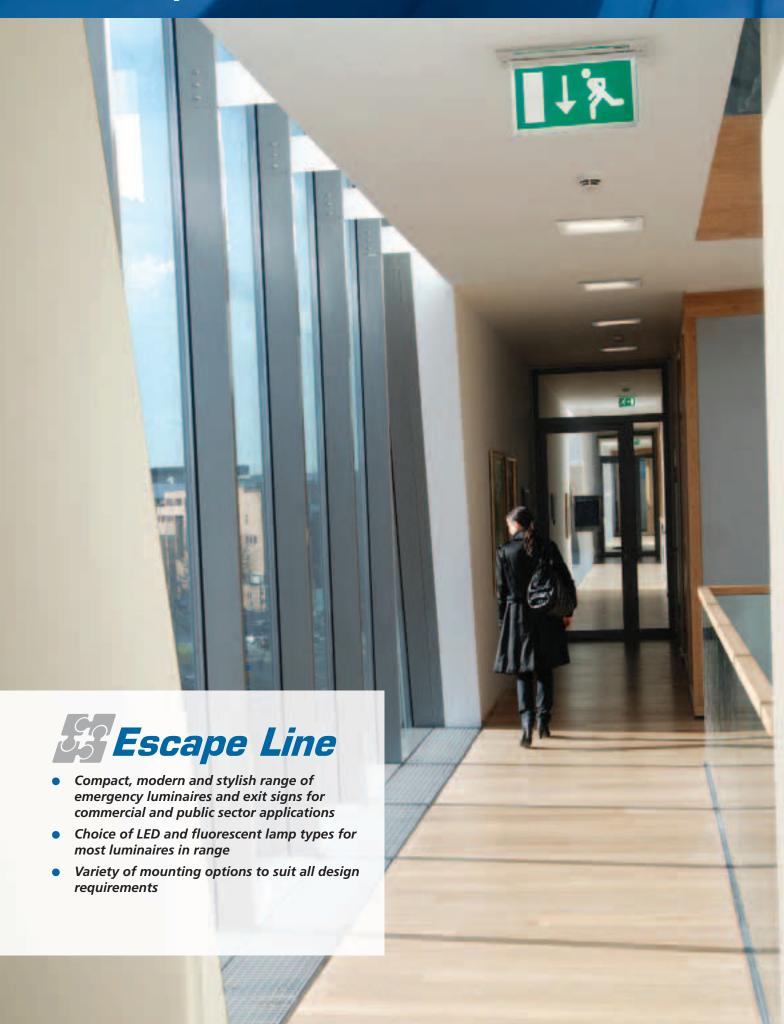

Slim-profile, back-lit exit sign.

- Ideal for use in hotels, public buildings, offices, bars, cafes etc
- Manufactured from high grade polycarbonate
- Self-adhesive PVC legend creates back-lit sign
- Ingress rated to IP42 when back mounted
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order luminaire and legend separately

























	
	(Fluorescent lamps only)

Luminaire										
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight			
PL2LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	NM3	24 hours	0 - 25 °C	1.7 kg			
PL3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.9 kg			
PLX23111	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	NM3	24 hours	0 - 25 °C	1.7 kg			
PLX33111	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours	0 - 25 °C	1.9 kg			

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends


X 11	Ⅱ- ೩	<i>≾</i> −∎	⊀ ↑■
RSE 2PL	RSE 3PL	RSE 6PL	RSE 5PL

Legends are self-adhesive PVC. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories

Order Code	Description
PL/WG	Protective wire guard
PL/BCM	Ceiling bracket, top mount

For accessory drawings, see page 92. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

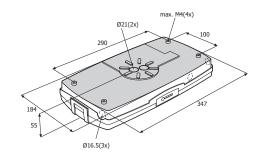



Slim-profile, edge-lit exit sign.

- Ideal for use in hotels, public buildings, offices, bars, cafes etc
- Manufactured from high grade polycarbonate
- Screen printed legend creates edge-lit sign
- Ingress rated to IP54 when ceiling mounted
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order luminaire and legend separately























(Fluorescent	lamps	only)


Luminaire										
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight			
PL2LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	NM3	24 hours	0 - 25 °C	1.7 kg			
PL3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.9 kg			
PLX23111	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	NM3	24 hours	0 - 25 °C	1.7 kg			
PLX33111	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours	0 - 25 °C	1.9 kg			

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends								
Single sided	X 1	 - %	<i>3</i> { → 	⊰ † ■	Double sided	 -	メ ↓■ メ ↓■	
	XE02PL	XE03PL	XE06PL	XE05PL		XE036PL	XE022PL	

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

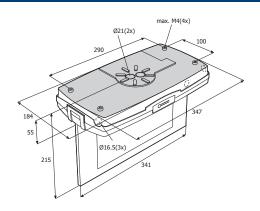

Accessories

Order Code	Description
PL/BPM	Pendant bracket, back mount

For accessory drawings, see page 92. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

Slim-profile luminaire.

- Ideal for use in hotels, public buildings, offices, bars, cafes etc
- Manufactured from high grade polycarbonate
- Light optimised diffuser
- Ingress rated to IP42 (back mount) or IP54 (ceiling mount)
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)

























(Fluorescent	lamns	only)


Luminaire									
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight	
PL2LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	90 lumens	NM3	24 hours	0 - 25 °C	1.7 kg	
PL3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	90 lumens	M3	24 hours	0 - 25 °C	1.9 kg	
PLX23111	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	170 lumens	NM3	24 hours	0 - 25 °C	1.7 kg	
PLX33111	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	170 lumens	M3	24 hours	0 - 25 °C	1.9 kg	

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Accessories

Order Code	Description
PL/WG	Protective wire guard
PL/BPM	Pendant bracket, back mount
PL/BCM	Ceiling bracket, top mount

For Way-Fer spacing data, see page 87. For accessory drawings, see page 92. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

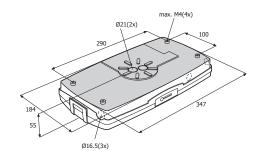



Recessed exit sign.

- Ideal for modern commercial environments
- Available with stainless steel, brushed silver aluminium, white or mirror finish brass trim plate
- Heavy duty steel enclosure with wing fixings for recessed application with separate slotted metal trim plate to support legend
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order recessed unit, trim plate and legend separately

























Testing	&	Kitemark -	fluorescent	lamp	only

Recessed unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight	
AR3LS	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	2.0 kg	
ARV33	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours	0 - 25 °C	2.0 kg	

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue. Silver-Lite exit sign available with slim profile trim plate, to special order. Please contact Emergi-Lite for details.

Trim plate






Order Code	Description
AE01	White slotted trim plate
AE04	Brass slotted trim plate
AE05	Stainless steel slotted trim plate
AF06	Brushed aluminium slotted trim plate

Lege	nds						
Single sided	₹ ↓	- *	⋠ → ■	⊰ 1 ■	Double sided	 - 	オロ オロ
	XE02A31	XE03A31	XE06A31	XE05A31		XE03/6A32	XE02/2A32

Legends are screen printed and slot through the metal trim plate. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

Cable entry via 20 mm knockouts on rear and ends of unit.



For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.



Recessed luminaire.

- Ideal for modern commercial environments
- Available with stainless steel, brushed silver aluminium, white or mirror finish brass trim plate
- Heavy duty steel enclosure with wing fixings for recessed application
- Separate metal trim plate with light-optimised diffuser
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order recessed unit and trim plate separately

























(Testing & Kitemark - fluorescent lamps only)

Recessed unit									
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight	
AR2LS	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	90 lumens	NM3	24 hours	0 - 25 °C	1.8 kg	
AR3LS	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	90 lumens	M3	24 hours	0 - 25 °C	2.0 kg	
ARV23	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	100 lumens	NM3	24 hours	0 - 25 °C	1.8 kg	
ARV33	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	100 lumens	M3	24 hours	0 - 25 °C	2.0 kg	


Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Trim plate



Order Code	Description
AR011	White trim
AR041	Brass trim
AR051	Stainless steel trim
AR061	Aluminium trim

Dimensions

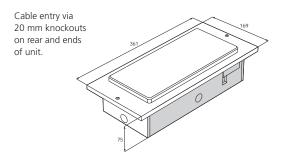

Ceiling cutout 325 x 140 mm.

For Silver-Lite spacing data, see page 87. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.



Edge-lit exit sign.

- LED or CCFL lamp options, for long life expectancy with low power consumption
- Available in white as standard with black and silver options to special order
- Intelligent Self-Test as standard
- Range of mounting accessories
- Designed & manufactured to meet the requirements of BS EN 60598.2.22 (Kitemark KM13139 - CCFL lamp)
- Manufactured in Hungary
- Order base unit, legend and mounting accessory (see page 51) separately





















(Kitemar	k - C	CFL	fluorescent	lamp	onl	y)	
----------	-------	-----	-------------	------	-----	----	--


Base un	it							
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Colour	Environment	Weight
ENV50-001	220 - 240 Vac, 50 Hz	1 W LED strip	27 mA	M3	24 hours		0 - 25 °C	1.4 kg
EM3-001	220 - 240 Vac, 50 Hz	CCFL	40 mA	M3	24 hours		0 - 25 °C	1.4 kg

Fluorescent = NiCaD, LED = NiMH. Black & silver options available to order. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Lege	nds							
Single sided	<i>≯</i> ; ↓ ■	- *	<i>≯</i> -■	X 1	Double sided	-	メリ メリ	X11 X11
	ESS012	ESS010	ESS011	ESS013		EDS020	EDS021	EDS022

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

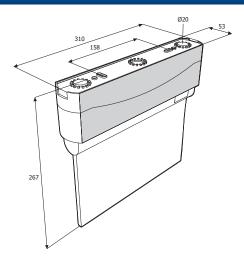

For accessory drawings, see page 93. For further information on Naveo emergency luminaire testing format, see pages 73 - 75 or contact Emergi-Lite.

Horizontal mounting EMH



The horizontal mounting attachment allows the luminaire to be mounted horizontally with the sign-plate hanging vertically. This kit consists of a reflector to redirect light to the sign-plate, an alternative sign-plate cover and screws to secure the sign-plate. Ideal for use above doors where space is limited.

Order Code	Description	Trim Colour
EMH-001	Horizontal	

Black and silver options available to order.

Recessed mounting EMF



Comprising a recessing cage, trim plate and fasteners. The recessing cage has side wings that are used to secure the cage to the ceiling. The luminaire is installed by simply pressing it into place and replacing the cover.

Order Code	Description	Trim Colour
EMF-001	Recessing kit	

Black and silver options available to order.

Wall Brackets EMV



The bracket moulding features a ratchet detail allowing the sign to be angled at virtually any angle to the wall, including parallel and perpendicular mountings.

Order Code	Description	Trim Colour
EMV-001	Wall bracket	

Black and silver options available to order.

Wire suspension EMS



The wire suspension kit includes an adjustment device and clutch mechanism through which the wire is pulled until the desired length is reached. Excess wire can then be cut away. The cut end does not enter the first-fix plate so cannot chafe wiring or compromise safety.

Variable wiring length makes this version suitable for angled mounting surfaces.

Order Code	Description	Trim Colour		
EMS-001	Adjustable wire suspension kit			

Black and silver options available to order.

Rod suspension EMR



Rod suspension kits are available for heights of 0.3, 0.5 and 1 metre.

Order Code	Description	Trim Colour				
EMR300-001	0.30 m rod suspension kit					
EMR500-001	0.50 m rod suspension kit					
EMR1000-001	1 m rod suspension kit					

Black and silver options available to special order (limited availability).





Compact, folded metal emergency exit sign.

- Ideal for wall mounting above doorways
- Generous downlight panel provides additional illumination at floor level (VE versions)
- VE versions available in white, brass, and stainless steel
- DVE double sided version available in white
- Designed & manufactured to meet the requirements of BS EN 60598.2.22. VE Kitemarked, ICEL1001 registration scheme
- Manufactured in the UK (LED), and Hungary (FL)
- Order base unit and legend separately

























Base unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Trim Colour	Environment	Weight
VE3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours		0 - 25 °C	2.2 kg
VE3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	2.2 kg
VE3317	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	2.2 kg
VE3315	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	2.2 kg
DVE3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	2.2 kg


Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends

⊀↓■	I-X	<i>≾</i> −■	⊀ 1∎
XE02V31	XE03V31	XE06V31	XE05V31

Legends are screen printed. Note DVE unit requires 2 legends. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

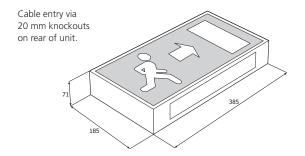

Accessories

Order Code	Description
VEBACK	Rear trim plate for a flat back when required for ceiling mounting

For DVE drawing, please contact Emergi-Lite. For further information on IR2 and Self-Test emergency luminaire testing formats, see pages 76 - 78 or contact Emergi-Lite.

Large, highly visible exit sign.

- Suitable for auditoria, hotel foyers, corridors etc
- Generous downlight panels provide additional illumination at floor level (EE versions)
- EE versions available in white
- DE double sided version available in white
- Navigator Performa unit available in black trim, with black & green legend, for cinemas, auditoria etc
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary
- Order base unit and legend separately

















Base unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Trim Colour	Environment	Weight
EE3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	3.0 kg
EE4323	220 - 240 Vac, 50/60 Hz	2 x 8 W T5	60 mA	CNM3	24 hours		0 - 25 °C	3.2 kg
DE3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	3.0 kg


For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends Navigator 一九 **.**₹→ **考**1 メル XE02E31 XE03E31 XE06E31 XE05E31 **Navigator Performa 以**1 **其**1 ズー XE02E4 XE03E4 XE06E4 XE05E4

Legends are screen printed. Note DE unit requires 2 legends. Navigator Performa CNM3 model includes green mains lamp and white emergency lamp.

Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

For DE drawing, please contact Emergi-Lite. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

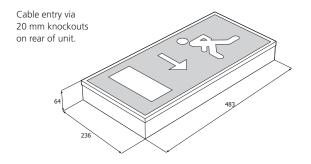





Recessed emergency exit sign.

- Suitable for application in suspended ceilings
- Polycarbonate enclosure with wing fixings for recessed application
- Diffuser panel with slot for exit sign legend
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order recessed unit, diffuser panel and legend separately

























Recessed unit							
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight*
RB3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	1.3 kg
RB3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours	0 - 25 °C	1.3 kg

^{*} Without legend. Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.


Diffuser panel

Order Code	Description
RE00	Recessed diffuser panel with sign panel slot

Legends							
Single sided	∦ ↓[- %	<i>≯</i> , → [ા ↑	Double sided	 - - - - - - - - - - - - -	X X
	XE02A31	XE03A31	XE06A31	XE05A31		XE03/6A32	XE02/2A32

Legends are screen printed and slot through the metal trim plate. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

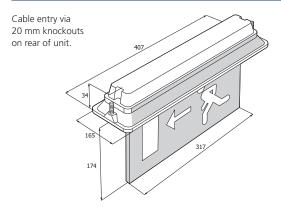

Ceiling cutout 380 x 136 mm.

For further information on IR2 and Self-Test emergency luminaire testing formats, see pages 76 - 78 or contact Emergi-Lite.



Recessed emergency luminaire.

- Suitable for application in suspended ceilings
- Polycarbonate enclosure with wing fixings for recessed application
- Light engineered diffuser for optimum spacing
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order recessed unit and diffuser panel separately























(Testing & Kitemark - fluorescent lamps only)


Recessed unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
RB2LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	90 lumens	NM3	24 hours	0 - 25 °C	1.1 kg
RB3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	90 lumens	M3	24 hours	0 - 25 °C	1.3 kg
RB2311	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	100 lumens	NM3	24 hours	0 - 25 °C	1.1 kg
RB3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	100 lumens	M3	24 hours	0 - 25 °C	1.3 kg

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Diffuser panel

Order Code	Description
RB00	Recessed diffuser panel

Dimensions

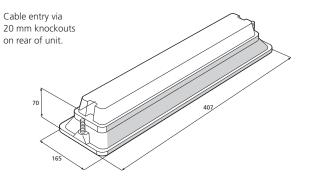

Ceiling cutout 380 x 136 mm.

For Silver-Scape spacing data, see page 88. For further information on IR2 and Self-Test emergency luminaire testing formats, see pages 76 - 78 or contact Emergi-Lite.



Distinctive edge-lit exit sign.

- Suitable for both prestigious, period settings and contemporary décors
- Available in white, polished brass or stainless steel trim
- Mains connector block seated in support pod
- Includes chain for maximum 0.5 m suspension
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary
- Order exit sign support and legend separately





















Exit sign								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Trim Colour	Environment	Weight
NB3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	3.0 kg
NB3314	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	2.5 kg
NB3315	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	M3	24 hours		0 - 25 °C	3.1 kg


For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends Single **Double ■**-***%** ⊀ન∎ **考**1 **4** 1 ズリ ズリ sided XE02NT31 XE03NT31 XE06NT31 XE05NT31 XE03/6NT32 XE02/2NT32

Legends are screen printed. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

Cable entry via BESA in support pod.



Accessories

Order Code	Description
NB/BFM07	Cantilever wall bracket in gold
NB/BWM07	Back-to-wall bracket in gold

For accessory drawings, please contact Emergi-Lite. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

Practical, robust double sided exit sign.

- Suitable for public walkways, enclosed car parks or educational establishments
- High grade polycarbonate enclosure with fixed legends
- Semi-recessing accessory available
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)

























(Testing 8	& Kitemark	- fluorescent	lamps only)


Exit sign								
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight	Includes Legend
DV3LS1XE22	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	M3	24 hours	0 - 25 °C	2.1 kg	31 31
DV3LS1XE36	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	M3	24 hours	0 - 25 °C	2.1 kg	-
DV3311XE22	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	МЗ	24 hours	0 - 25 °C	2.1 kg	* 1 * 1
DV3311XE36	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	МЗ	24 hours	0 - 25 °C	2.1 kg	 -

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories

Order Code	Description
BBZ	Semi-recessing bezel kit in white

For accessory drawing, see page 93. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

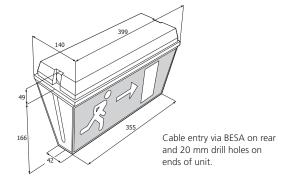

Ceiling cutout 390 x 130 mm when semi-recessing.



Standard, surface mounted luminaire.

- Simple, vandal resistant design suitable for general use in interior and exterior locations
- Available with high grade polycarbonate (B) or cast aluminium (WA) enclosure
- Opal diffuser as standard with clear polycarbonate diffuser option available
- Converts easily to exit sign with addition of self-adhesive legend
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order luminaire and legend separately























(Testing	&	Kitemark	_	fluorescent	lamps	only	v)
(ICStillig	O.	RECEITION		Hadrescent	iuiips	0111	y /

Luminaire								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
B2LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	90 lumens	NM3	24 hours	0 - 25 °C	1.7 kg
B3LS1	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	90 lumens	M3	24 hours	0 - 25 °C	2.1 kg
B2311	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	170 lumens	NM3	24 hours	0 - 25 °C	1.7 kg
B3311	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	170 lumens	M3	24 hours	0 - 25 °C	1.9 kg
B4321	220 - 240 Vac, 50/60 Hz	2 x 8 W T5	60 mA	170 lumens	CNM3	24 hours	0 - 25 °C	2.0 kg
WA2321	220 - 240 Vac, 50/60 Hz	2 x 8 W T5	60 mA	250 lumens	NM3	24 hours	0 - 25 °C	2.1 kg

Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Options


Order Code	Description
Suffix 1	Clear prismatic diffuser

Legends

⊀ ↓■	1-2	⊀ -∎	ズ↑▮	オ ▮ ▮
RSE2120	RSE3120	RSE6120	RSE5120	RSE120

Legends are self-adhesive label. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Dimensions

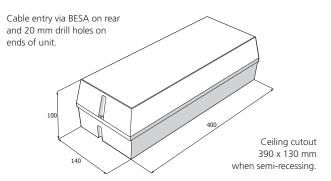

Accessories

Order Code	Description
BBZ	Semi-recessing bezel in white
VRKIT	Vandal resisting security screw kit
BWG	Protective wire guard

For Weatherforce spacing data, see page 88. For accessory drawing, see page 93. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.



Standard, surface mounted luminaire.

- Simple, vandal resistant design suitable for general use in interior and exterior locations
- High grade polycarbonate enclosure
- Converts easily to exit sign with addition of self-adhesive legend
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK (LED), and Hungary (FL)
- Order luminaire and legend separately























(Testing & Kitemark - fluorescent lamps only)

Luminaire								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
XW2LS11	220 - 240 Vac, 50/60 Hz	1 W LED strip	12 mA	90 lumens	NM3	24 hours	0 - 25 °C	1.1 kg
XW3LS11	220 - 240 Vac, 50/60 Hz	1 W LED strip	27 mA	90 lumens	M3	24 hours	0 - 25 °C	1.3 kg
XXW23111	220 - 240 Vac, 50/60 Hz	8 W T5	30 mA	170 lumens	NM3	24 hours	0 - 25 °C	1.2 kg
XXW33111	220 - 240 Vac, 50/60 Hz	8 W T5	60 mA	170 lumens	M3	24 hours	0 - 25 °C	1.5 kg


Fluorescent = NiCaD, LED = NiMH. For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Legends			
⊀ +■	1-7	メ −∎	⊀ +■
RSE2X	RSE3X	RSE6X	RSE5X

Legends are self-adhesive label. Euro pictogram legends shown. ISO 7010 format legends are available to order, see page 95 or contact Emergi-Lite.

Accessories				
Order Code	Description			
XTR	Semi-recessing bezel in white			

See Silver-Scape (page 55) for recessed version. For Day-Lite Ex-cel spacing data, see page 89. For accessory drawing, see page 93. For further information on IR2 and Self-Test emergency luminaire testing formats, see pages 76 - 78 or contact Emergi-Lite.

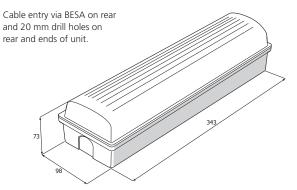

Ceiling cutout 342 x 95 mm when semi-recessing.



Surface mount LED light source.

- Ideal for general use in offices, public buildings, retail and light industrial units
- Folded metal enclosure finished with white epoxy coat
- Versions for escape route (Suffix E) or open area (Suffix A) use available
- Single point high performance LED for extended life
- Styled to be a slim, functional emergency luminaire
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK












Single p	oint LED							
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
LS2L1E	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	10 mA	110 lumens	NM3	24 hours	0 - 25 °C	0.6 kg
LS2L1A	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	10 mA	110 lumens	NM3	24 hours	0 - 25 °C	0.6 kg
LS3L1E	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	28 mA	110 lumens	M3	24 hours	0 - 25 °C	0.6 kg
LS3L1A	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	28 mA	110 lumens	M3	24 hours	0 - 25 °C	0.6 kg

Dimensions

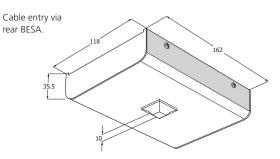

For spacing data, please contact Emergi-Lite.

Recessed LED light source.

- Ideal for general use in offices, public buildings, retail and light industrial units
- Polycarbonate enclosure finished in white
- Versions for escape route (Suffix E) or open area (Suffix A) use available
- Single point high performance LED
- Battery and control pack slot through a 39 mm ceiling cut-out
- Plug and socket supplied for mains connection
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in the UK














Single p	oint LED							
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
LR2L1E	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	10 mA	110 lumens	NM3	24 hours	0 - 25 °C	0.6 kg
LR2L1A	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	10 mA	110 lumens	NM3	24 hours	0 - 25 °C	0.6 kg
LR3L1E	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	28 mA	110 lumens	M3	24 hours	0 - 25 °C	0.6 kg
LR3L1A	220 - 240 Vac, 50/60 Hz	1 x 1 W LED	28 mA	110 lumens	M3	24 hours	0 - 25 °C	0.6 kg

 $[\]ensuremath{^{\star}}$ Recessed unit only. Weight of battery and control pack 0.8 kg.

Dimensions

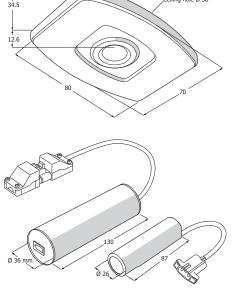

Ceiling cutout 39 mm diameter.



Aesthetically pleasing, decorative luminaire.

- 28 Watt 2D high power luminaire
- Fire-resistant polycarbonate luminaire body with opal diffuser
- Angled and banded trim options in a range of finishes
- Semi-recessing accessory available
- Designed and manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary


















Luminai	re							
Order Code	Input Voltage	Lamp Type	Power Cons. Mains/ Self-contained	Lamp Output Mains/ Self-contained	Operation / Duration (hrs)	Recharge Period	Environment	Weight
CLQ28NM	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / 250 mA	1800 / 250 lumens	NM3	24 hours	0 - 25 °C	2.6 kg
CLQ28M	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / 250 mA	1800 / 250 lumens	M3	24 hours	0 - 25 °C	3.2 kg
CLQ28PHF	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / - mA	1800 / 250 lumens	230 V	-	0 - 25 °C	2.1 kg

For AC/AC or AC/DC slave luminaires please refer to our EMEX Central Power Supply Systems Catalogue.

Dimensions

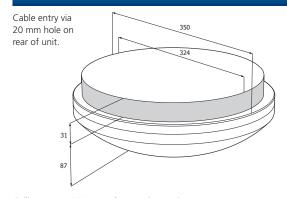

Ceiling cutout 330 mm when semi-recessing.


Accessories

Order Code	Description
CLQ/SR	Semi-recessing kit

For Camarque spacing data, see page 89. For further information on Naveo, IR2 and Self-Test emergency luminaire testing formats, see pages 73 - 78 or contact Emergi-Lite.

Angled trim accessory






Order Code	Trim Colour
CLQ/GA	
CLQ/SA	
CLQ/WA	
CLQ/BKA	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing.


Banded trim accessory





Order Code	Trim Colour
CLQ/GB	
CLQ/SB	
CLQ/WB	
CLQ/BKB	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing.

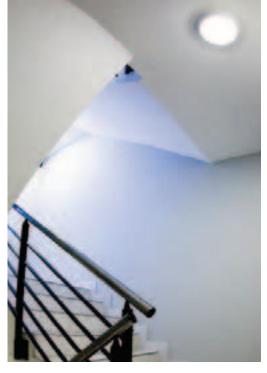







- 28 Watt 2D high power luminaire
- Slim-line design for escape route and open area lighting
- Polycarbonate luminaire body with clear light optimised diffuser
- Hinged geartray for easy access
- Semi-recessing accessory available
- Designed and manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary


















Luminai	re							
Order Code	Input Voltage	Lamp Type	Power Cons. Mains/ Self-contained	Lamp Output Mains/ Self-contained	Operation / Duration (hrs)	Recharge Period	Environment	Weight
CPW28NM	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / 250 mA	1800 / 250 lumens	NM3	24 hours	0 - 25 °C	3.0 kg
CPW28M	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / 250 mA	1800 / 250 lumens	M3	24 hours	0 - 25 °C	3.0 kg
CPW28PHF	220 - 240 Vac, 50/60 Hz	28 W 2D	200 / - mA	1800 / - lumens	230 V	-	0 - 25 °C	2.8 kg

Dimensions



Ceiling cutout 346 mm when semi-recessing.

Accessories

Order Code	Description
CPW/BZ	Semi-recessing bezel

For Cordona spacing data, see page 89. For accessory drawings, see page 93. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

Portable emergency luminaire.

- High brightness, high power, focused beam LED light source
- Ideal for installers, maintenance or security personnel
- Durable polycarbonate body with clear polycarbonate diffuser
- Half power illumination (45 lumens for 3 hours) or full power (100 lumens for 1 hour)
- Carrying handle with variable ratchet positioning
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in France



















Luminai	re						_
Order Code	Input Voltage	Lamp Type	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight
PWL113E	220 - 240 Vac, 50/60 Hz	LED	100 / 45 lumens	NM1 / NM3	24 hours	0 - 25 °C	0.7 kg










The slim-line Portable Work-Lite includes a wall mount and recessed socket for mains connection, plus adjustable carry handle for directional emergency lighting.





Twin beam emergency lighting.

- Ideal for indoor use in smaller warehouses, factory spaces and industrial open areas
- Can be mounted upright on a wall or stanchion
- 20 Watt tungsten halogen lamps with polycarbonate lenses
- Mild steel enclosure with white powder coat
- Optional battery retaining clamp, or time delay feature
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary















Twin bea	am unit							
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output*	Operation / Duration (hrs)	Recharge Period	Environment	Weight
HV203	220 - 240 Vac, 50/60 Hz	2 x 20 W TH	100 mA	600 lumens	NM3	24 hours	0 - 25 °C	7.8 kg

For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.


Options

Order Code	Description
Suffix TD	Run on timer (20 W version only) to support slow start mains luminaires

Accessories

Order Code	Description
HVBC	Battery retaining clamp
HLWG	Protective wire guard

For Range-Lite spacing data, please contact Emergi-Lite. For accessory drawings, see page 93. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

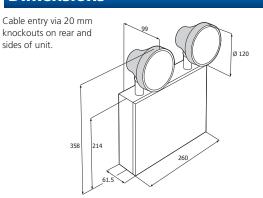

^{*} Total lamp output for all lamps on unit.



Twin beam emergency lighting.

- Ideal for indoor use in larger warehouses, factory spaces and industrial open areas
- Can be mounted upright on a wall or stanchion
- 55 Watt tungsten halogen lamps
- Mild steel enclosure
- Single lamp option available
- Optional time delay feature to support slow start mains luminaires
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary


















Twin beam unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output*	Operation / Duration (hrs)	Recharge Period	Environment	Weight
HL551	220 - 240 Vac, 50/60 Hz	2 x 55 W TH	100 mA	1800 lumens	NM1	24 hours	0 - 25 °C	7.8 kg
HL551PC	220 - 240 Vac, 50/60 Hz	2 x 55 W TH	100 mA	1800 lumens	NM1	24 hours	0 - 25 °C	7.8 kg
HL1553	220 - 240 Vac, 50/60 Hz	1 x 55 W TH	100 mA	900 lumens	NM3	24 hours	0 - 25 °C	7.8 kg

For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue. HL551PC includes polycarbonate lenses.

Options

Order Code	Description
Suffix TD	Run on timer

Dimensions

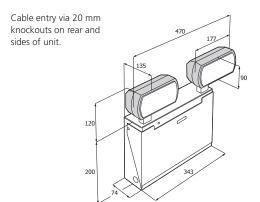

Accessories

Order Code	Description	
HLWG	Protective wire guard	

For Range-Lite spacing data, please contact Emergi-Lite. For accessory drawings, see page 93. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.

^{*} Total lamp output for all lamps on unit.

Twin beam emergency lighting.

- Rated for external use with battery and electronics enclosure sealed to IP65
- Remote mounting lamps with horizontal and vertical head adjustment
- Polycarbonate enclosure with screw locked front panel
- Meets the anti-glare requirement when projectors mounted at least 30° above the line of sight
- Optional time delay feature to support slow start mains luminaires
- Designed & manufactured to meet the requirements of BS EN 60598.2.22
- Manufactured in Hungary





















Twin beam unit								
Order Code	Input Voltage	Lamp Type	Power Consumption	Lamp Output*	Operation / Duration (hrs)	Recharge Period	Environment	Weight
HL203E3	220 - 240 Vac, 50/60 Hz	2 x 20 W TH	100 mA	600 lumens	NM3	24 hours	0 - 25 °C	7.6 kg
HL551E3	220 - 240 Vac, 50/60 Hz	2 x 55 W TH	100 mA	1800 lumens	NM1	24 hours	0 - 25 °C	7.6 kg


For AC/AC or AC/DC slave units please refer to our EMEX Central Power Supply Systems Catalogue.

Options

Order Code	Description
Suffix TD	Run on timer

Dimensions

Cable entry via 20 mm knockouts on rear and sides of unit.



For Range-Lite spacing data, please contact Emergi-Lite. For further information on Naveo and IR2 emergency luminaire testing formats, see pages 73 - 77 or contact Emergi-Lite.



^{*} Total lamp output for all lamps on unit.



High specification road tunnel safety luminaire.

- Designed to cope with the most demanding environments - tunnels, industrial complexes etc
- Ideal where substantial directional sign viewing distances are required
- Angulated style for improved passageway visibility
- Cold cathode energy saving lamp with 40% energy saving over comparable fluorescents
- Stainless steel body, opal polycarbonate diffuser
- Legend to suit user requirement
- Manufactured in the UK












Exit sign							
Order Code	Input Voltage	Lamp Type	Power Consumption	Operation / Duration (hrs)	Recharge Period	Environment	Weight
ETUNM3-005	220 - 240 Vac, 50/60 Hz	CCFL	40 mA	NM3	24 hours	0 - 25 °C	7.2 kg

Dimensions

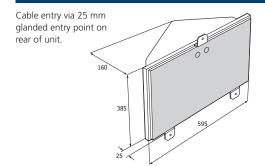

Legends



For specific projects, legend information will differ dependent on location and particular requirements. To specify this product please contact Emergi-Lite Technical Sales department.

Explosion proof luminaire.

- IP66 to IEC529 rated explosion proof and waterproof
- Suitable for Zone 1 and Zone 2
- 2 x M20 ISO (1 plugged) cable entry
- Corrosion resistant light alloy body and end cap with a polycarbonate overtube
- 4 wire and earth terminals with loop facility (max. cable size 4 mm²)
- Certification Code: EEx d IIC T6; Certification Standard: EN50014-018; Certifying Authority: SIRA, ATEX
- Manufactured in the UK
















Luminaire										
Order Code	Input Voltage	Lamp Type	Lamp Output	Operation / Duration (hrs)	Recharge Period	Environment	Weight			
XP2312	220 - 240 Vac, 50/60 Hz	8 W T5	100 lumens	NM3	24 hours	0 - 40 °C	5.5 kg			
XP4322	220 - 240 Vac, 50/60 Hz	8 W T5	100 lumens	CNM3	24 hours	0 - 40 °C	5.5 kg			

Dimensions

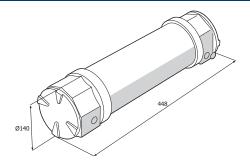

EEx d IIC T6 flame proof luminaire, to Gas Group IIC (hydrogen), capable of with standing a maximum temperature of $85^{\circ}{\rm C}$

Information summary for guidance only

For detailed information on hazardous area requirements please consult the British Standard code, BS 5345.

Code of Practice

BS 5345, the UK Standard for hazardous area equipment, installation and maintenance gives guidance relating to:

- 1 > The degree of protection suitable for the hazardous zone
- 2 > The gas groups of any gases or vapours
- 3 > The temperature classification of the gases or vapours

For further information on this product, or for discussion of hazardous area lighting using the Hazard-Lite or DTS product range of explosion proof luminaires, contact Emergi-Lite.

Zone Classification

- Zone 0 > An explosive gas-air mixture exists continuously, or for long periods.
- **Zone 1** > An explosive gas-air mixture is likely in normal circumstances.
- **Zone 2** > An explosive gas-air mixture is not likely to occur in normal operation and then only for a short time.

Testing Solutions





Addressable emergency lighting testing with cloud-based remote management and monitoring.

Naveo delivers the ultimate solution to managing emergency lighting, by allowing you to control the entire emergency lighting installation, inspection and maintenance process from any point, with system information and reports available at any time.

Naveo combines pre-programmable emergency lighting testing with cloud-based electronic record keeping and system management, to dramatically reduce the expense and burden that manual testing, maintenance and fault checking brings.

Building on the success of Emergi-Lite's Centrel addressable testing system, Naveo places control firmly at your fingertips, with immediate access available anywhere via smartphone, tablet, laptop or PC. This innovative approach breaks new ground in enabling end users to manage multi-site emergency lighting systems wirelessly, with system performance and maintenance records held 'in the cloud'.

Furthermore, Naveo is responsive and promotes increased building safety, by supplying maintenance and fault updates via email or text to repair teams, with parts listings by PDF, enabling forward planning of maintenance and spares ordering with ease.







The benefits of Naveo are significant:

- Naveo offers a fully customisable solution for emergency lighting testing, irrespective of the size or location of the site, or whether multiple sites are being managed
- Naveo makes your time and resources more productive by saving valuable time spent every year on manual collection and recording of emergency lighting data
- Internet-based Naveo control software holds all system testing and maintenance data securely within an external server, for access anywhere, at any time, via smart-phone, tablet or PC
- Naveo software updates are automatically applied, with new luminaire parts and product information automatically updated in the background
- All Naveo emergency lighting luminaires are individually addressed, making fault assessment and location a simple task
- Automated pre-programmable test schedules provide the status of the lamp, battery and PCB, and upload directly to remote server
- Most of the inspection work can be completed onscreen by simply ticking off emergency luminaire status as 'OK' or 'Defective' on your mobile device or PC
- Preventative alerts and fault updates are provided by email or SMS, with spares requirements by PDF, for optimal forward planning of maintenance
- At the push of a button you have an overview of potential and current maintenance issues, allowing you to structure the data you require
- After an inspection, the Naveo software can generate an EN 50172-compliant PDF log for on-site record keeping and inspection by the relevant authorities, as appropriate
- Naveo system backwards compatible with CT luminaires



How does Naveo operate?



Each emergency lighting unit includes an individually addressed testing module which conducts functional and duration tests and communicates results to the DCP 2.

Each DCP is designed to collate test data from up to 750 emergency lighting units.

The DCP transfers all data to the Naveo secure external server 4 via an encrypted internet connection 3.


All test results are collated and processed at the external server, with maintenance requirements and faults logged and transmitted to maintenance teams for action, either to PC, laptop, smartphone or tablet 5.

Status information and test reports can be accessed securely from anywhere and any device with internet connection, making maintenance planning simple.

Naveo offers a fully customizable solution to managing emergency lighting:

The Naveo solution offers a convenient range of pricing packages dependent on the size and scope of the installation, enabling customers to tailor to their specific needs.

Additional upgrades can be added at any time to include new emergency luminaires into the system, making the solution highly scalable. For further details, please contact Emergi-Lite.

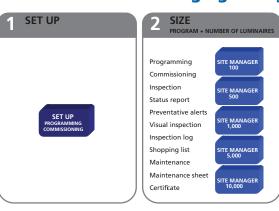



When do you need to test?

Fire Safety Regulations require emergency lighting to be tested in accordance with BS 5266-8 (EN 50172).

Simplified Testing Regime

- Daily check central power supply indicators for healthy operation
- Monthly functional check
- Yearly duration check
- Always keep documented records
- Automatic test devices should meet IEC 62034

What needs to be checked & tested?

- Mains present and healthy
- Battery present
- Battery charging
- Inverter circuit in emergency operation
- Lamp functions and in circuit
- Duration

Effective testing with Naveo


Naveo's comprehensive, technologically advanced approach ensures testing to meet the requirements of BS 5266-8 (EN 50172):

- Naveo tests can be run either manually or automatically
- Unattended tests can be performed using the schedule program
- All automatic test schedules can be easily programmed for the type of test required and for the time the test is to be performed
- All results of tests are stored at the remote server for recall at a later date
- Each luminaire is programmed with an address which is used for interrogation and fault diagnosis

Supporting Naveo installations

Naveo is fully supported through our project sales and technical teams, including:

- Design of the emergency lighting system with Naveo compatible emergency luminaires
- Practical advice on installation matters, such as power and data cable structure, system set-up etc
- Full commissioning of the system, pre-operation, from our highly experienced field service team
- Maintenance contracts, available as required to support the installation, for added peace of mind
- Project after-sales support, with project files retained by our service department so that preparation of additional luminaires as required is a straightforward task

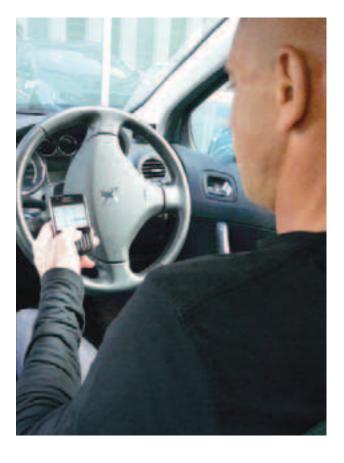

Technical literature & advice

Please contact a member of our sales team for full details and advice on Naveo, including:

- Technical design guide, providing in-depth technical information on the system
- System demonstrations, arranged at your own premises or at our head office for an informed assessment of the system and software capabilities

Additionally, a separate brochure explaining the Naveo solution in full is available on request.



EMERGI-LITE




Advanced infra-red emergency lighting testing system

IR2 is a safe, fast and easy way to test emergency lighting, offering the user a simple walk test process to interact with the emergency lighting system.

IR2 offers unprecedented flexibility including:

- Choice of automatic or manual testing
- Upload and download capability
- Simple Self-Test as standard
- Handheld interaction with luminaires so no need for ladders or keyswitches
- Luminaire status information indicated by green/amber LED
- Choice of a simple 'test-only' transmitter (IR2-TX) or intelligent bi-directional handset (IR2-TESTWARE™)
- Data management via PC

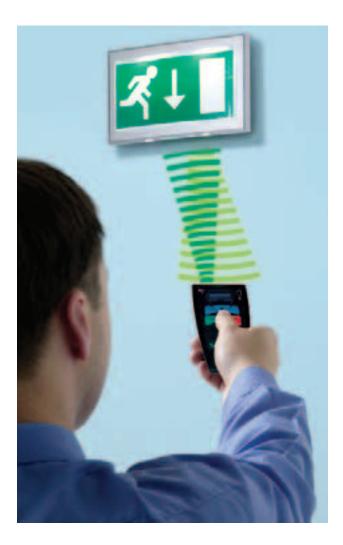



Testing can be done using the IR2-TX, 'test-only' transmitter, or the intelligent bi-directional handset (IR2-TESTWARE™ package), which tests, interrogates and reports. IR2-TESTWARE™ allows the user to view the results on small screen, or, as desired to download them to a PC to produce automated reports.

Key benefits and features

- Easy to operate: users become familiar with the control device in a very short amount of time indicator interpretation is straightforward
- Effective testing: luminaire status is clearly given.
 The user will be able to fault find and plan maintenance efficiently
- No extra wiring: Eliminates the need for key switches
- Zero impact: the fabric of the building remains unaffected (no additional wiring, no building works and no need for redecoration)
- Promotion of safety awareness: users find the test method interesting and interactive
- Cost and time savings: reduced installation effort with less wiring and lower maintenance times allied with the ability to plan maintenance schedules better
- Regulation compliance: BS & EN standards requirements for testing emergency lighting luminaires are met by using the IR2 system
- Compatibility with existing schemes: new product developments are backwards compatible with the original Flashpoint IR system
- Proven reliability: IR2 has been proven in the field for many years. Recent hardware and software updates have maintained technical advancements

Optional Self-Test operation

- Self-Test is an option, which is pre-set in the factory and can be programmed from the bi-directional IR2-TESTWARE™ handset
- If a test is not performed in 12 months an automatic duration Self-Test will take place. The 'Self-Test' interval can be programmed between 2 and 365 days (factory pre-set to 12 months)
- Self-Test can be inhibited
- Internal timing in the luminaire is synchronised with the mains frequency for accurate control
- LED indicators on the emergency luminaire identify faults locally. A Self-Test status report can be downloaded to the bi-directional handset

LED indication

Each luminaire has a transmitter/ receiver module fitted with green and amber LED indicators. The LED lit colours give the luminaire status.

	Normal operation - OK
	24 hour recharge needed
	Mains failure mode
	Fault: battery not charging
	Battery not charging & in 24 hr charge period after mains re-connection
	Charging OK, but other fault present [emergency lam or battery capacity / voltage]
	Luminaire in test

Key: Flashing LE

IR2-TESTWARE™

Bi-directional handset comprising handset, PCLINK software and USB interconnect cable.



- For testing, interrogating and reporting the condition of IR2 fitted luminaires
- OLED (organic LED) screen
- 4 button menu system with large control buttons
- Backwards compatible with Flashpoint IR (IR1) systems
- Optional password entry protection
- The unit gives instant status report of all emergency luminaires in detail
- Onboard memory with storage capacity for 2000 records
- Download information into a spreadsheet format for automated record keeping and assessment
- USB socket, USB interconnect cable provided for PC link
- Allows maintained to non-maintained switching

Order Code Description IR2-TESTWARE™ Intelligent control package; hand-held luminaire interrogator/tester, PC-LINK software, USB cable and instructions

IR2-TX

Initiates test sequence (tests for a 3 hour duration and automatically resets back to the normal condition).



- Status notified by green and yellow LED indicators on the luminaire
- Reset the luminaire to normal operation (to test for brief operation)
- Backwards compatible to Flashpoint IR (IR1)

Order Code	Description
IR2-TX	IR2 test transmitter

Comprehensive product range



A full range of exit signs and luminaires are available with IR2. Look for the IR2 symbol on individual product pages.

EMERGI-LITE



Current regulations stipulate periodic mandatory testing of an emergency lighting system to ensure the correct operation of the system in the event of a mains failure, together with compilation of all corresponding documentation.

The Regulatory Reform (Fire Safety) Order 2005 and Fire (Scotland) Act 2005 place responsibility for the testing of emergency lighting systems firmly with the owner or occupier of the building.

Manual testing and the compilation of records can prove expensive, time-consuming, and disruptive to commercial activities.

Emergi-Lite Self-Test offers an easy and cost effective solution for regular testing of emergency lighting, without requiring programming or complex set-up procedures.

It provides continuous monitoring of the mains and battery status, together with a regular testing regime designed to meet mandatory requirements.

Key features of Self-Test

- Simple and dependable automatic testing
- Easy installation
- Tests the battery, charger and lamp
- Each luminaire works independently in the event of an emergency
- Available in a variety of luminaire types
- Visual fault identification
- Runs tests in background mode
- Ability to stagger luminaire testing

Automatic compliance to prescribed intervals

An Emergi-Lite Self-Test automatically runs a commissioning routine when the mains is switched on initially. An onboard clock/calendar microprocessor ensures the appropriate tests are carried out at the allocated time-period. Test functions include continuous monitoring, monthly, annual and staggered periodic testing plus a push-button test.

Comprehensive product range




A full range of exit signs and luminaires are available with Self-Test. Look for the Self-Test symbol on individual product pages.

Note: Serenga, Aqualux ranges and Horizon LED exit signs include in-built intelligent self-testing within standard units.

Product example - Serenga Escape

The illustration below highlights the intelligent Self-Test testing facility built into the base of the smart-frame of all Serenga Escape exit signs.

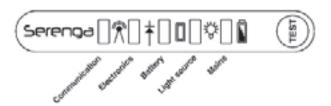

Test operation



Green LED indicates normal operation.



Amber LED indicates a fault.

Our Serenga/Aqualux ranges and our Horizon LED exit signs are supplied with in-built self-testing feature.

Product example - Navigator Compact

Our standard product range is available with Self-Test as an option. Contact Emergi-Lite for further details and specific product codes.

Green and amber LEDs indicate luminaire status, as below:

Test operation



Green LED indicates normal operation.



Amber LED indicates a fault.





The requirement for emergency lighting originates from the Fire Precautions Act 1971 and was further enforced by the Fire Precautions (Workplace) Regulations 1997 (Amended 1999).

The Regulatory Reform (Fire Safety) Order, FSO came into force in October 2006 and now replaces all previous fire safety legislation.

The key considerations from the Fire Safety Order are:

- The FSO creates one simple fire safety legislative control for all workplaces/non-domestic premises
- Control is fire risk assessment based, with the responsibility for fire safety resting with the 'responsible person' for the premises
- All persons inside the building/in the vicinity who might be affected by a fire must be protected
- Employees will be required to act upon the fire risk assessment, make remedial arrangements accordingly and maintain the fire precautions
- Failure to comply with the rules would be a breach of law, with the consequence of enforcement or prohibition notices being served

The fire safety risk assessment is a legal requirement, and where a site has 5 or more employees the risk assessment must be documented.

Fire certificates under the Fire Precautions Act 1971 are now no longer valid. Guidance documents on the new Fire Safety legislation have been published and the appropriate ones must be consulted as part of the overall fire risk assessment.

Other important legislation and regulations, such as The Buildings Regulations and The Health and Safety "Safety Signs and Signals" Regulations 1996, also have a requirement for emergency lighting and must be considered as part of the design and specification.

A number of standards have been devised to provide guidance on application of emergency lighting in line with legislative requirements, and to determine the quality of product to be specified.

The major standards to be considered when designing a high-level emergency lighting system are:

BS 5266-1, -7 and -8

This standard sets the guidelines for installation of emergency lighting, as to the location and frequency of emergency luminaires and exit signs, and the minimum lighting levels required

BS EN 60598.2.22

This is the product standard which establishes the performance requirements of emergency lighting luminaires and internally illuminated exit signs

IEC 62034

This standard defines the requirement for automated testing systems for emergency lighting

ICEL1001, ICEL1004 & ICEL1009

Guides and registration schemes provided by the Industry Committee for Emergency Lighting which define enhanced performance requirements for the differing types of emergency lighting, backed by independent testing

General requirements for emergency lighting (BS 5266-1, -7 and -8)

If emergency lighting is required it should:

- Indicate the escape routes clearly with exit signs so there is no doubt which is the way out
- Ensure fire safety equipment such as fire alarm call-points, fire extinguishers etc can be located
- Illuminate escape routes, and open areas used in escape routes so that obstacles can be avoided
- Provide illumination for high risk task areas to allow the processes to be shut down safely

Any point on an escape route or leading to it must have an exit sign so that direction of travel is never in doubt. Internally illuminated exit signs offer the most effective method of achieving the requirement, and have a viewing distance twice that of exit signboards see right. (Note: where exit signboards are installed, these must now have 5 lux illuminance on the sign to meet the requirements on BS 5266 / EN 1838 - for practical purposes unachievable through use of converted mains luminaires).

Points of emphasis

Mandatory points of emphasis have been established where directional signage or specific illumination is required. These are:

- 1. Near an exit door
- 2. Near changes of direction
- 3. Near stairs and changes of level
- 4. Near the intersection of a corridor
- Near each piece of fire-fighting equipment or manual call point
- 6. Near each First Aid point

Exit signs

Designated legend formats






European pictogram format signs are acceptable, as are ISO 7010 format signs, although there should not be a mixture of both within an installation.




Text only signs are no longer acceptable and should have been withdrawn.


Maximum viewing distances


Exit sign boards have a maximum viewing distance defined as 100 x the height of the sign (h), in metres.





For illuminated exit signs, the maximum viewing distance is defined as 200 x the height of the sign (h), in metres.

















81

Technical reference

In addition to these points of emphasis, the following need to be considered when planning emergency lighting.

Escape routes

A defined escape route of 2 m width must be illuminated to a minimum of 1 lux along the centre line (see right).

Open areas (anti panic)

Open areas must be illuminated to 0.5 lux minimum in the core area (see below right). This also applies to areas with undefined escape routes, in halls or areas greater than 60 m².

High risk task areas

This refers to areas normally associated with moving machinery, dangerous materials or processes, and other areas of high risk where hazards may continue after mains lighting failure. Illuminance levels should be maintained at 10% (or over) of the normal lighting level or 15 lux, provided within 0.5 seconds, to allow for safe egress and/or termination of processes. For high risk task areas, the lux requirement is calculated at the plane of the task rather than floor level.

Additional areas

Additional areas not part of the escape route still require illumination as people may be located there and/or measures may be required to ensure the safety of persons or processes. These areas include kitchens, first aid/operating rooms, lifts, refuge areas, escalators and moving walkways, toilets larger than 8 m² (or smaller without borrowed light), disabled toilets, small lobbies and pedestrian routes within covered car parks.

Luminaire mounting height


Emergency luminaires should be mounted at least 2 m above the floor. There is no upper limit but luminaires should be fitted below smoke level if there is a significant risk of floor illumination being affected.


System integrity


All compartments should include two or more emergency luminaires to counter the risk of emergency luminaire failure.

Stand-by lighting

If stand-by lighting is used as emergency lighting it should conform to all the requirements of emergency lighting.

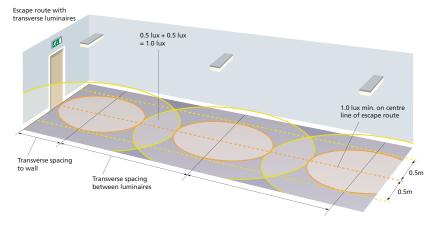

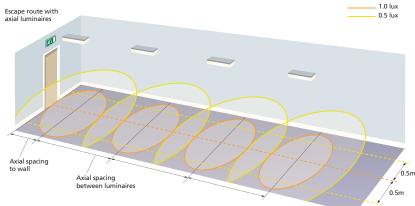

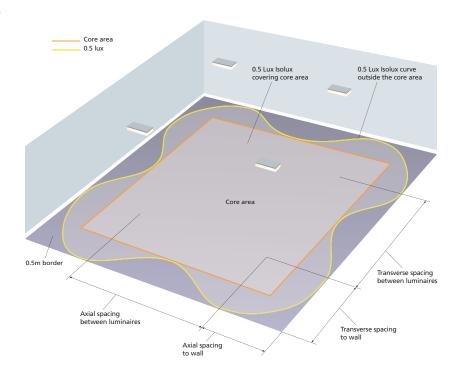

82

Specific location requirements

BS 5266 stipulates light levels, response and duration times for specific locations within premises, and for specific activities, including:

- Kitchens
- First Aid rooms
- Examination and treatment rooms
- Refuge areas for the mobility impaired
- Plant rooms, switch rooms and emergency winding facilities for lifts
- Reception areas
- Crash bars or security devices at exit doors
- Inspection of the condition of fire control and indicating equipment

A table showing the illuminance recommendation for these specific locations and requirements can be found in BS 5266-1.

Emergency lighting systems

There is a varied range of emergency lighting available to suit different budgets, decors, building requirements, colours and specifications. The types and categories available for specification are:

Types of emergency lighting

Self-contained

Each luminaire contains a battery and electronic circuitry to charge batteries and operate the lamp.

Slave

Luminaires are powered from a central system.

Conversions

Almost any mains fluorescent luminaire can be converted for emergency use. Emergi-Lite is registered to ICEL 1004 to undertake emergency lighting conversions at our head office facility in Leeds, UK.

Categories of emergency lighting

Non-maintained (NM)
 Luminaires operate when the mains fail.

Maintained (M)

Luminaires operate when the mains fail, but can also be operated if required using a switch when the mains supply is healthy.

Combined Non-maintained (CNM)

The luminaire contains more than one lamp, one of which is mains operated, the other is for emergency use only. When the mains is healthy one or more lamps operate, but should the mains fail the emergency lamp operates.

Combined Maintained

Similar to combined non-maintained, but when the mains supply is healthy both lamps operate, whereas on mains failure only one lamp operates. CE marking alone on an emergency lamp does not necessarily imply that the product will work in an emergency situation. All emergency lighting must be designed and manufactured to meet the requirements of BS EN 60598.2.22, the established product standard.

Emergency lighting products may be independently certified and approved as a means of proving quality in the product, thereby giving an enhanced level of assurance to the installer, and greater confidence and less risk in the work he performs. Emergency lighting independently tested and carrying the approval of a recognised national standards body, such as the BSI Kitemark or European ENEC mark, serves this purpose.

Selecting products from a reputable manufacturer also serves to assure that products and services supplied will perform satisfactorily. National certification bodies such as BAFE - British Approvals for Fire Equipment - provide, through schemes such as SP203-4, third party certification and recognition that emergency lighting manufacturers have competency in undertaking design, installation, commissioning and maintenance of such systems.

Emergi-Lite is a core member of the BAFE scheme.

Testing and maintenance of emergency lighting

Fire legislation requires the safety systems within a building to be tested and maintained to ensure correct working order.

The major standards for emergency lighting establish the testing requirement, and that testing and maintenance should be done by a "competent person" (trained, with appropriate skills and experience).

Automated testing solutions are available to assist with the testing requirement, such as the Self-Test, IR2 infrared and Naveo addressable testing solutions available from Emergi-Lite (see pages 72 - 78 of this catalogue for more details on these solutions).

For automated testing solutions, IEC 62034 provides specific guidance for luminaire testing, including:

- Testing should be undertaken during periods of low risk
- Tests should be performed at the appropriate times for the correct duration
- Testing should prove the emergency circuit operates correctly, and that the battery powers the luminaire for the duration of the test
- Results of the test should be reliably indicated

Within the IEC 62034 Standard, test systems for both self-contained and centrally powered emergency lighting systems are covered.

For further information about emergency lighting standards and legislation, or the testing requirement, contact Emergi-Lite direct or visit our website www.emergi-lite.co.uk for a copy of our latest technical guide (see page 98 for more details).



Technical reference

Checklist for emergency lighting system design

Point	Establish	Action
1	Establish position of fire equipment, position of hazards such as steps, changes of direction, stairs, first aid points etc.	Provide an emergency luminaire near (within 2 m horizontally) of each of these points of emphasis.
2	Establish designated exit doors, points on escape routes or open areas where a sign is required to make the exit obvious.	Provide exit signs with arrows if necessary, observing the maximum viewing distances of the exit sign type.
3	Establish the need for external escape lighting.	Provide emergency luminaires so that people can proceed outside to a place of safety.
4	Establish the escape routes and establish mounting heights of luminaires above the floor.	Position luminaires along parts of the escape route not already illuminated near the above points to provide 1 lux minimum along the centre line and 0.5 lux minimum in the 1 m central band. Use published data in the form of spacing tables for the luminaires to determine the positions taking into account the mounting height.
5	Establish the open areas used as escape routes and other open areas larger than 60 m² and establish mounting heights of luminaires above the floor.	Provide 0.5 lux minimum in the core area. Use published data (as above) to determine the positions.
6	Establish the position of lifts, escalators, toilets, control/plant rooms, pedestrian walkways in covered car parks.	Provide emergency luminaires in all of these areas.
7	Establish the location of any first aid point or fire equipment not on an escape route or open area.	Provide 5 lux emergency illuminance on the floor in the vicinity of the point. This also applies for a first aid room.
8	Establish the toilet areas.	Provide emergency lighting for toilets larger than 8 m², as if they were open areas. For toilets smaller than 8 m², unless illuminated by borrowed emergency light from another area, provide at least one emergency luminaire. Provide emergency lighting to all disabled toilets.
9	Establish any small lobbies with no borrowed light.	Provide emergency lighting.
10	Establish any central power supply (if used) is in an area of low risk away from other switchgear or plant. ing use is known:	Position the central power supply in its own room in fire-proof construction.
11	Establish any need for stand-by lighting.	Provide generators as required. If the response time is longer than 5 seconds, then transitional, alternative or additional emergency lighting must be provided.
12	Establish any special needs for the occupants such as impaired mobility or impaired sight.	Provide additional emergency lighting to reduce the risk to those people to help them evacuate the premises. This applies to designated refuge areas (which may require the provision of emergency voice communication).
13	Establish the location of any high risk task areas and the normal lighting	
	illuminance (lux) in these areas.	Provide 10% of the normal illuminance (lux) or 15 lux minimum.
14		Provide 10% of the normal illuminance (lux) or 15 lux minimum. Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure.
14	illuminance (lux) in these areas.	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a
	illuminance (lux) in these areas. Establish if there are any dust or dirt problems.	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure.
15	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations.	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations.
15 16	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations. Establish if there is any dimmable lighting and shopping malls.	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations. Provide maintained emergency lighting.
15 16	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations. Establish if there is any dimmable lighting and shopping malls. Establish whether people would be "unfamiliar" with the escape routes. Establish the use of the premises: entertainment (including temporary such as licensed evening dance at a school) sleeping risk	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations. Provide maintained emergency lighting. Provide maintained exit signs.
15 16	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations. Establish if there is any dimmable lighting and shopping malls. Establish whether people would be "unfamiliar" with the escape routes. Establish the use of the premises: entertainment (including temporary such as licensed evening dance at a school) sleeping risk residential special care	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations. Provide maintained emergency lighting. Provide maintained exit signs. Recommended Minimum Duration: 3 h 3 h 3 h
15 16	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations. Establish if there is any dimmable lighting and shopping malls. Establish whether people would be "unfamiliar" with the escape routes. Establish the use of the premises: entertainment (including temporary such as licensed evening dance at a school) sleeping risk	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations. Provide maintained emergency lighting. Provide maintained exit signs. Recommended Minimum Duration: 3 h 3 h
15 16	illuminance (lux) in these areas. Establish if there are any dust or dirt problems. Establish any local regulations. Establish if there is any dimmable lighting and shopping malls. Establish whether people would be "unfamiliar" with the escape routes. Establish the use of the premises: entertainment (including temporary such as licensed evening dance at a school) sleeping risk residential special care non-residential care	Allow a service factor as appropriate. 0.8 is allowed for normal areas, but for dusty environments 0.5 may be required, or alternatively instigate a regular cleaning procedure. Provide emergency lighting to comply with the regulations. Provide maintained emergency lighting. Provide maintained exit signs. Recommended Minimum Duration: 3 h 3 h 3 h 1 h

Note: because the duration times are varied, it is customary in the UK to use 3 h.

Note: for points 5 and 6 the luminaires positioned near points of emphasis can be moved slightly within the 2 m horizontal tolerance to fit in with the spacing or array of emergency luminaires in the escape route or open area.

This checklist is for guidance purposes only and does not form an exhaustive list of all requirements to standards and legislation, which should be reviewed when undertaking emergency lighting system design.



Serenga Escape SER-F

Mount height	SER-F Escape route (min. 1 lux) + normal risk						
(m)	$\longleftrightarrow \square$	$ \longleftrightarrow $	□ ↔				
3.0	0.9	4.8	4.9	1.0			
3.5	-	4.8	4.4	-			
4.0	-	4.2	3.5	-			





Serenga Surface Mounted SER-SA & SER-SE

Mount height	SER-SE Esc (min. 1 lux) +	· ·	SER-SA Anti panic (min. 0.5 lux) open area		
(m)	□ <→ □	□ ↔	$ \longleftrightarrow $	□ ↔	
3.0	11.7	3.1	9.2	9.2	
3.5	13.4	3.4	10.3	10.3	
4.0	14.8	3.7	11.5	11.5	
5.0	17.7	4.1	13.2	13.2	

Full product details for Serenga Sun-Lite surface mounted are available on pages 19 - 20.



Serenga Sun-Lite SER-DA & SER-DW


Mount height		scape route + normal risk	SER-DA Anti panic (min. 0.5 lux) open area		
(m)		$\bigcirc \longleftarrow \bigcirc$		$\bigcirc \longleftarrow \bigcirc$	
2.5	4.6	10.5	3.1	7.8	
3.0	5.2	11.8	3.2	8.2	
3.5	5.6	12.9	3.2	8.6	
4.0	6.0	14.1	3.1	8.9	
5.0	6.7	16.0	2.4	9.1	

Full product details for Serenga Sun-Lite escape route and open area downlighters are available on pages 21 - 22.



Serenga Sun-Lite SER-DS

Spotlight: 5 lux on centre of object								
Centre object to ceiling (C)	Luminaire to wall (L)							
0.5	0.2							
1.0	0.6							
1.5	0.9							
2.0	1.3							
2.5	1.6							
3.0	2.0							
3.5	2.3							
4.0	2.6							





Distances in metres

Full product details for the Serenga Sun-Lite spotlight downlighter are available on page 23.



Spacing data tables

Horizon OH / OZ 8 Watt



Mount height	(1		e route + normal ris	sk	Anti panic (min. 0.5 lux) open area			
(m)	 		□ ↔□		 		□ ↔	
2.8	3.8	11.1	5.4	1.9	5.6	14.8	6.8	2.7
3.0	3.6	11.2	5.5	1.8	5.6	15.1	7.0	2.7
3.5	2.6	11.0	5.5	1.4	5.5	15.7	7.4	2.7
4.0	0.8	10.6	5.2	0.7	5.3	15.8	7.6	2.6
6.0	-	-	-	-	-	14.5	7.1	-
8.0	-	-	-	-	-	3.2	2.8	-

Full product details for Previx are available on pages 41 - 43.

Aqualux OW / STF 8 Watt



Mount height	(r		e route - normal ris	k	Anti panic (min. 0.5 lux) open area			
(m)	$\Big\ \!\!\!\! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! $		□↔□		$\hspace{-0.1cm} \hspace{-0.1cm} \longleftrightarrow \hspace{-0.1cm} $		□↔□	
2.8	3.9	9.9	5.8	2.1	4.9	12.0	7.3	2.9
3.0	4.0	10.2	5.9	2.0	5.1	12.3	7.6	2.9
3.5	4.0	10.7	6.0	1.8	5.4	13.2	8.0	3.0
4.0	3.7	11.2	5.9	1.4	5.6	14.0	8.2	2.9
6.0	-	10.1	3.2	-	5.1	16.0	8.2	1.6
8.0	-	-	-	-	-	15.0	5.8	-

Full product details for Aqualux are available on pages 35 - 38.

Aqualux OW / STF 11 Watt



Mount height	(1		e route + normal ris	k	Anti panic (min. 0.5 lux) open area			
(m)	$\Big\ \leftrightarrow \Big[\Big]$		□ ↔		*		□ ↔	□ →
2.8	4.3	10.7	7.8	3.0	5.3	12.9	9.6	3.9
3.0	4.5	11.0	8.0	3.1	5.5	13.3	9.9	4.0
3.5	4.7	11.7	8.3	3.1	5.9	14.3	10.5	4.2
4.0	4.8	12.3	8.6	3.1	6.2	15.1	11.1	4.3
6.0	2.7	13.0	8.5	1.4	6.5	17.9	12.3	4.3
8.0	-	9.1	5.6	-	4.0	19.0	10.4	2.8

Full product details for Aqualux are available on pages 35 - 38.

Previx PX LED

Mount height		Escape (min. 1 lux) -	route normal risk	
(m)			\longrightarrow	
LED strip				
2.5	2.6	6.9	6.7	2.6
3.0	2.6	7.3	7.2	2.7
4.0	2.3	7.5	7.5	2.4
LED strip plus PX/LE	NS4 lens kit			
2.5	4.9	11.8	5.4	2.1
3.0	4.7	13.2	5.8	1.8
4.0	3.3	13.7	5.5	1.2



Full product details for Previx are available on pages 41 - 43.

Way-Fer PLX 8 Watt / LED

Mount height	(1		e route + normal ris	k	(panic ‹) open area	a
(m)	 		□ ↔				□ ↔ □	
Fluorescen	t 8 W T5							
2.5	2.8	7.6	5.7	2.1	3.8	9.8	7.1	2.8
4.0	2.2	8.0	6.1	1.7	4.0	11.1	8.3	3.0
5.0	-	7.2	5.7	-	3.6	11.4	8.6	2.8
LED strip								
2.5	2.2	7.3	4.5	1.6	4.0	10.1	6.1	2.3
3.0	2.5	7.0	4.5	0.9	4.2	10.8	6.4	2.3
4.0	-	3.7	2.8	-	3.4	9.8	6.4	1.7



Full product details for Way-Fer are available on pages 45 - 47.

Silver-Lite AR 8 Watt / LED

Mount height	(Escape min. 1 lux)	e route + normal ris	k			panic ĸ) open area	a
(m)	 		□ ↔	□ ↔ // ////////////////////////////////	*		□ ↔ □	
Fluorescei	nt 8 W T5							
2.5	1.8	5.1	4.7	1.7	2.6	7.2	6.1	2.3
4.0	-	4.7	4.3	-	1.9	7.2	6.2	1.6
6.0	-	-	-	-	-	-	-	-
LED strip								
2.5	2.3	6.0	5.5	2.2	3.1	7.5	7.0	2.8
4.0	1.8	6.3	5.9	1.8	3.2	8.6	7.9	3.0
6.0	-	4.2	4.1	-	2.2	8.8	8.3	2.2

Full product details for Silver-Lite are available on pages 48 - 49.



Spacing data tables

Silver-Scape RB 8 Watt / LED



Mount height	(1		e route + normal ris	k	(panic ĸ) open area	a
(m)			□ ↔ □	□ → *	₩		□↔□	
Fluorescen	t 8 W T5							
2.5	2.65	7.81	4.53	1.36	5.59	13.57	8.44	3.39
4.0	-	6.89	3.06	-	6.18	16.48	9.92	3.58
6.0	-	-	-	-	5.68	17.59	10.09	2.72
LED strip					•			
2.5	0.6	5.8	3.3	0.3	3.9	9.3	6.2	1.7
3.0	-	2.7	2.5	-	1.4	8.0	5.9	1.3
4.0	-	-	-	-	-	7.6	3.9	-

Full product details for Silver-Scape are available on pages 54 - 55.

Weatherforce B / WA 8 Watt (opal diffuser)



Mount Height	(r		e route + normal ris	k	(panic x) open area	a
(m)	#↔		□↔□	□ ↔	$\hspace{-0.1cm} \hspace{-0.1cm} -0$		□↔□	
2.5	2.2	6.4	5.6	1.9	3.2	8.5	7.3	2.8
4.0	0.7	5.9	5.2	0.4	3.0	9.1	7.8	2.6
6.0	-	-	-	-	-	-	-	-

Full product details for Weatherforce are available on page 58.

Weatherforce B / WA 8 Watt (clear prismatic difuser)



Mount Height	(r		e route + normal ris	sk	(panic x) open area	a
(m)	#↔□		□↔□	□ ↔	 		□ ↔ □	
2.5	1.4	4.5	4.2	1.3	2.6	7.2	6.1	2.3
4.0	-	2.9	3.0	-	1.9	7.2	6.2	1.6
6.0	-	-	-	-	-	-	-	-

Full product details for Weatherforce are available on page 59.

Day-Lite Ex-cel XXW 8 Watt / LED

Mount height	(r		e route + normal ris	k	(panic x) open area	a
(m)	#↔□		□↔□		 ← □		□↔□	
Fluorescen	t 8 W T5 17	0 lumens						
2.5	2.9	8.5	4.7	1.6	4.6	12.3	6.4	2.5
4.0	-	7.8	3.9	-	4.2	12.6	6.8	2.0
6.0	-	-	-	-	-	-	-	-
Fluorescen	8 W T5 10	00 lumens						
2.5	1.65	6.0	3.55	0.5	3.3	9.7	5.2	1.7
4.0	-	2.7	0.5	-	1.0	9.5	5.5	0.7
6.0	-	-	-	-	-	-	-	-
LED strip								
2.5	-	4.3	2.4	-	4.2	8.5	4.2	1.3
3.0	-	4.9	1.0	-	4.9	10.0	4.1	-
4.0	-	-	-	-	-	6.7	2.1	-



Full product details for Day-Lite Ex-cel are available on page 59.

Camarque CLQ 28 Watt / 38 Watt

Mount height	OPAL 28 W 2D	OPAL 38 W 2D
(m)	Escape route (min. 1 lux) + normal risk	Escape route (min. 1 lux) + normal risk
	$\bigcirc \leftrightarrow \bigcirc$	$\bigcirc \leftrightarrow \bigcirc$
2.0	6.0	8.1
2.5	6.3	8.4
3.0	6.5	8.7
4.0	6.5	8.9



Full product details for Camarque are available on pages 62 - 63.


Cordona CPW 28 Watt

Mount height	CLEAR POLYCARBONATE 28 W 2D
(m)	Escape route (min. 1 lux) + normal risk
	$\bigcirc \leftrightarrow \bigcirc$
2.5	7.9
3.0	8.0
4.0	8.1


Full product details for Cordona are available on page 64.




SER-M3-003 + SER-FE2D




SER-M3-003 + SER-FS2D




SER-M3-003 + SER-FB4




SER-M3-003 + SER-FE2D




SER-M3-003 + SER-FS2D




SER-M3-003 + SER-FE2D + SER-BZKIT




SER-M3-003 + SER-FS2D + SER-BZKIT




SER-M3-003 + SER-FE2D + SER-BZKIT + SER-RKIT




SER-M3-003 + SER-FS2D + SER-BZKIT + SER-RKIT




SER-M3-003 + SER-FE2D + SER-RKIT



SER-M3-003 + SER-FS2D + SER-RKIT




SERSAM / SERSEM




SER-DS / DW / DA **R230 CONTROL MODULE** max. Ø10 (2x) max. Ø10 (2x) OH + XE OZ + XE OHD + XE OZD + XE ОН οz OH + OH/WG OH + OH/BCM OH + OH/BWM

91


OHD + OH/BWM




OW + XE




OW + OW/DSC + XE




OW / STF + OW/BCM




OW / STF + OW/BWA




OW / STF + OW/BWM




OW + OW/DSC + OW/BWM




PX + PX/BCM




PX + PX/DSLKIT + PX/BWM




PLX + PL/WG



PLX + PL/BCM




PLX + PL/BPM







EM3 + EMH + ESS




EM3 + EMF + ESS




EM3 + EMS + ESS




EM3 + EMV + ESS




EM3 + EMR + ESS



DV + BBZ





B / VA + BBZ




B / VA + BWG

XXW + XTR






CPW/BZ



HV / HL + HLWG





93

Screen printed (curved)		Format	Self		Single sided	sided			Double sided		Safety equipment signs	oment signs
Screen printed (curved) - SER-SC012 SER-SC010 SER-SC011 SER-SC013 - - CFT [Th X CT] CFT CT CT CT CT CT CT CT			Assembly	Down	Left	Right	dh	Down	Left/Right	dn	Extinguisher	Fire hose
Screen printed (cuned) - SER-SC012 SER-SC014 SER-SC013 - Screen printed (cuned) - SER-SN012 SER-SN012 SER-SN011 SER-SN013 - Screen printed (back-lit) - XE2DH XE30H XE6DHS XE5DHS - Screen printed (back-lit) - XE2DH XE63H XE6DHS XE5DHS - Screen printed (back-lit) - XE02PX XE03PX XE60PX XE6DH XE6DH Screen printed (back-lit) - XE02PX XE03PX XE60PX XE6DSW - Screen printed (back-lit) - XE02PX XE03PX XE03PX XE03PX XE03PX Screen printed (white) - XE02PX XE03PX XE03PX XE03PX XE03PX Screen printed (white) - XE02PX XE03PX XE03PX XE03PX - Screen printed (white) - XE02PX XE03PX XE03PX XE03PX - Screen printed (black) - XE02PX			<u> </u>	<u>-</u>	,x	<u> </u>	<u>-</u> •⊀	_	**	- - - - -	—	•
Screen printed (normal) - SER-SNO12 SER-SNO11 SER-SNO11 SER-SNO13 - Screen printed (back-lit) - XEQ2HS XEG0HS XEG0HS XEG0HS - Screen printed (back-lit) - XEQ2HS XEG0HS XEG5HS - Screen printed (back-lit) - XEG2PX XEG3W XEG5W - Screen printed - XEG2PL XEG3PL XEG5PL XEG5PL Screen printed - XEG2PL XEG3PL XEG5PL XEG5PL Screen printed - XEG2PL XEG3PL XEG5PL XEG3PL Screen printed - XEG2PL XEG3PL XEG5PL XEG3PL Screen printed (white) - XEG2PL XEG3PL XEG5PL XEG3PL Screen printed (white) - XEG2PL XEG3PL XEG5PL XEG3PL Screen printed - XEG2PL XEG3PL XEG5PL XEG3PL Screen printed - XEG2PL XEG3PL XE	Serenga SER	Screen printed (curved)	1	SER-SC012	SER-SC010	SER-SC011	SER-SC013	1	ı	1	SER-SC802	SER-SC803
Screen printed - XEO2H XEO3H XEO6H XEO5H - Perspex screen printed (back-lit) - XEO2HS XEO3HS XEO6HS XESOHS - Screen printed (back-lit) - XEO2PW XEO3PW XEO6W XEO5W - Screen printed (back-lit) - XEO2PW XEO3PW XEO6PW XEO5PW - Screen printed - XEO2PW XEO3PW XEO5PW XEO2PW - Screen printed - XEO2PW XEO3PH XEO6PW XEO5PH XEO2PH Screen printed - XEO2A31 XEO3A31 XEO5A31 XEO2A32 XEO2A32 Screen printed (white) - XEO2B31 XEO3A31 XEO5A31 XEO5A31 XEO2A32 Screen printed (black) - XEO2B31 XEO3A31 XEO5A31 XEO3A31 XEO3A31 Screen printed - XEO2A31 XEO3A31 XEO5A31 XEO3A31 XEO3A31 Screen printed - - XEO3A31		Screen printed (normal)	ı	SER-SN012	SER-SN010	SER-SN011	SER-SN013	ı	I	ı	SER-SN802	SER-SN803
Screen printed (back-lit) - XE02NA XE03HS XE60HS XE50HS - Self-adhesive (edge-lit) - RSEZW RSE3W RSEGW RSESW RSEZW/RSEZW Screen printed - RSEZPL RSE3H RSEGPL RSEZW/RSEZW Screen printed - RSEZPL RSE3PL RSEGPL RSEZPL RSEZPL RSE3PL RSEGPL RSEZW/RSEZW RSEZPL RSEGPL RSEGPL RSEZW/RSEZW RSEZPL RSEZPL RSEGPL RSEZPL - RSEZPL RSEGPL RSEGPL RSEZPL - RSEZPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL RSEGPL - XE02A31 XE05A31 XE02PL RED3C1A Screen printed - XE02A31 XE05A31 XE02A31 XE02A32 Screen pri	Horizon OH	Screen printed	ı	ХЕО2Н	ХЕ03Н	ХЕ06Н	ХЕО5Н	ı	I	I	XLF802H	XLF803H
Screen printed (back-lit) - KE02W KE03W KE05W KE05W RSESW RSESW RSESW - Self-adhesive (edge-lit) - RSE2W RSE3W RSE5W RSE5W RSE5W RSE5W RSE5W RSE2W/RSE2W Screen printed - RSE2PL RSE3PL RSE6PL RSE5PL - - Perspex screen printed - XE02PL XE03PL XE05PL XE03PL - - RE022PL Screen printed - XE02PL XE03A31 XE05A31 XE03PL XE03PL - <td></td> <td>Perspex screen printed</td> <td>ı</td> <td>XE20HS</td> <td>XE30HS</td> <td>XE60HS</td> <td>XE50HS</td> <td>ı</td> <td>XE36HD</td> <td>XE55HD</td> <td>XLF802HS</td> <td>XLF803HS</td>		Perspex screen printed	ı	XE20HS	XE30HS	XE60HS	XE50HS	ı	XE36HD	XE55HD	XLF802HS	XLF803HS
Self-adhesive (edge-lit) - RSEZW RSE3W RSEGW RSESW RSEZW/RSEZW Screen printed - RSE2PL RSE3PL RSE6PL RSE5PL - Perspex screen printed - RSE2PL RSE3PL RSE6PL RSE5PL - Screen printed - XE02PL XE03PL XE05PL XE022PL - Screen printed - XE02V31 XE03A31 XE05A31 XE03ZA32 XE03ZA32 Screen printed - - XE02V31 XE05CA31 XE05CA31 XE05CA31 XE03ZA32 Screen printed (white) - XE02E31 XE03E31 XE05E31 - - Screen printed (white) - XE02E4 XE03E31 XE05E31 XE03ZA31 XE03ZA32 Screen printed (white) - XE02E31 XE03E31 XE05CA31 XE03ZA32 Screen printed (white) - XE02E31 XE05A31 XE03ZA31 XE03ZA32 Screen printed (white) - - -	Aqualux OW / STF	Screen printed (back-lit)	1	XE02W	XE03W	XE06W	XE05W	1	ı	1	XLF802W	XLF803W
Screen printed — XE02PX XE03PX XE05PY XE05PL — Perspex screen printed — XE02PL XE03PL XE05PL — Screen printed (white) — XE02PL XE03PL XE02PL XE02PL Screen printed (white) — XE02A31 XE03A31 XE06A31 XE02PL XE02ZA32 Screen printed (white) — XE02V31 XE03Y31 XE06A31 XE05ZA3 EDS021 Screen printed (black) — XE02E31 XE03E31 XE06E31 XE05E31 — Screen printed (black) — XE02E31 XE03E31 XE06E31 XE05E31 — Screen printed — XE02E31 XE03B31 XE06E31 XE05E31 XE02ZA32 Screen printed — XE02M131 XE03B31 XE06E31 XE03ZA132 XE02ZA132 Double sided fitted — — — — — — Self-adhesive sticker RSE120 RSE2120 RSE5120 RSE5120		Self-adhesive (edge-lit)	ı	RSE2W	RSE3W	RSE6W	RSE5W	RSE2W/RSE2W	RSE3W/RSE6W	ı	ı	1
Self-adhesive sticker - RSEZPL RSE3PL RSE6PL RSE5PL - Perspex screen printed - XE02PL XE03PL XE05PL XE02PL XE02PL Screen printed - XE02A31 XE03A31 XE06A31 XE05A31 XE02ZA32 Screen printed - ESS012 ESS013 ESS013 EDS021 Screen printed (white) - XE02CB31 XE06E31 XE05CB31 - Screen printed (black) - XE02E31 XE06E31 XE05E31 - Screen printed (black) - XE02A31 XE03E31 XE05E31 XE05E31 Screen printed (black) - XE02A31 XE03A31 XE06E31 XE05E31 Screen printed - XE02A31 XE03A31 XE06A31 XE05E31 Double sided fitted - - - - - Self-adhesive sticker RSE120 RSE3120 RSE6120 RSE5120 -	Previx PX / PXR	Screen printed	ı	XE02PX	XE03PX	XE06PX	XE05PX	ı	XE03PX / XE06PX	1	ı	ı
Perspex screen printed - XE02PL XE03PL XE06PL XE05PL XE02PL Screen printed - XE02A31 XE03A31 XE06A31 XE05A31 XE02ZA32 Screen printed - XE02V31 XE03V31 XE06SV31 XE05CV31 - Screen printed (white) - XE02E31 XE03E31 XE05E31 XE05E31 - Screen printed (white) - XE02E31 XE03E31 XE05E31 - - Screen printed (black) - XE02A31 XE06E31 XE05E31 - - Screen printed - XE02A31 XE03A31 XE05E31 XE02ZA32 - Screen printed - XE02A31 XE03A131 XE05A131 XE02ZA32 XE02ZA32 Screen printed - - - - - - Double sided fitted - - - - - - Self-adhesive sticker RSE120 RSE3120 RSE5120 - - </td <td>Way-Fer PLX</td> <td>Self-adhesive sticker</td> <td>1</td> <td>RSEZPL</td> <td>RSE3PL</td> <td>RSE6PL</td> <td>RSE5PL</td> <td>1</td> <td>ı</td> <td>1</td> <td></td> <td></td>	Way-Fer PLX	Self-adhesive sticker	1	RSEZPL	RSE3PL	RSE6PL	RSE5PL	1	ı	1		
Screen printed - XE02A31 XE03A31 XE05A31 XE02A31 XE02A32 Screen printed - ESS012 ESS010 ESS011 ESS013 EDS021 Screen printed - XE02V31 XE03V31 XE05V31 - Screen printed (white) - XE02E31 XE03E31 XE05E31 XE05E31 Screen printed (black) - XE02E4 XE03E4 XE05E31 XE05E31 XE05E31 Screen printed - XE02A31 XE03A31 XE05A31 XE05A31 XE02IA32 Screen printed - XE02A131 XE05A131 XE05A131 XE02IA32 Screen printed - - - - XE02IA32 Screen printed - XE02A131 XE05A131 XE05A131 XE05A131 Double sided fitted - - - - XE22 Self-adhesive sticker RSE120 RSE2120 - - -		Perspex screen printed	ı	XE02PL	XE03PL	XE06PL	XE05PL	XE022PL	XE036PL	XE055PL	ı	1
Screen printed — ESS012 ESS010 ESS013 EDS021 EDS021 Screen printed (white) — XE02V31 XE03V31 XE06V31 XE05V31 — Screen printed (white) — XE02E31 XE03E31 XE06E31 — — Screen printed (black) — XE02A31 XE03E4 XE03E4 XE05E4 XE05A31 XE02LA32 Screen printed — XE02A31 XE03A31 XE05A31 XE02LA32 Screen printed — — — — — — Double sided fitted — — — — — XE22 Self-adhesive sticker RSE120 RSE3120 RSE5120 RSE5120 — —	Silver-Lite ARV	Screen printed	ı	XE02A31	XE03A31	XE06A31	XE05A31	XE02/2A32	XE03/6A32	XE05/5A32	ı	ı
Screen printed (white) - XE02V31 XE03V31 XE06V31 XE05SV31 - Screen printed (white) - XE02E31 XE03E31 XE06E31 - - Screen printed (black) - XE02A31 XE03E4 XE03E4 XE05E4 - - Screen printed - XE02A31 XE03A31 XE05A31 XE02/ZA32 Screen printed - XE02NT31 XE05MT31 XE02/ZA32 Double sided fitted - - - - XE22 Self-adhesive sticker RSE120 RSE2120 RSE5120 - - XE22	Endurance EM	Screen printed	ı	ESS012	ESS010	ESS011	ESS013	EDS021	EDS020	EDS022	1	1
Screen printed (white) - XE02E31 XE03E31 XE05E31 - Screen printed (black) - XE02E4 XE03E4 XE06E4 XE05E4 - Screen printed - XE02A31 XE06A31 XE05A31 XE02/2A32 Screen printed - XE02NT31 XE06MT31 XE05MT31 XE02/2NT32 Double sided fitted - - - - XE22 Self-adhesive sticker RSE2120 RSE3120 RSE5120 RSE5120 -	Navigator Compact VE / DVE	Screen printed	ı	XE02V31	XE03V31	XE06V31	XE05V31	ı	ı	ı	ı	ı
Screen printed (black) - XE02E4 XE03E4 XE06E4 XE05E4 - Screen printed - XE02A31 XE06A31 XE05A31 XE02/2A32 Screen printed - XE02NT31 XE03NT31 XE06NT31 XE02/2NT32 Double sided fitted - - - - XE22 Self-adhesive sticker RSE120 RSE2120 RSE3120 RSE5120 -	Navigator EE	Screen printed (white)	1	XE02E31	XE03E31	XE06E31	XE05E31	1	1	1	1	1
Screen printed - XE02A31 XE03A31 XE06A31 XE05A31 XE02/2A32 Screen printed - XE02NT31 XE06NT31 XE02/2NT32 Double sided fitted - - - - Self-adhesive sticker RSE120 RSE2120 RSE6120 RSE5120	Navigator Performa EE	Screen printed (black)	ı	XE02E4	XE03E4	XE06E4	XE05E4	ı	ı	ı	I	ı
Screen printed - XE02NT31 XE03NT31 XE05NT31 XE02/2NT32 Double sided fitted - - - - - XE22 Self-adhesive sticker RSE120 RSE2120 RSE3120 RSE6120 - -	Silver-Scape RB	Screen printed	1	XE02A31	XE03A31	XE06A31	XE05A31	XE02/2A32	XE03/6A32	XE05/5A32	ı	1
Double sided fitted - - - - - XE22 Self-adhesive sticker RSE120 RSE3120 RSE6120 - -	Corniche NB	Screen printed	ı	XE02NT31	XE03NT31	XE06NT31	XE05NT31	XE02/2NT32	XE03/6NT32	XE05/5NT32	I	ı
Self-adhesive sticker RSE120 RSE2120 RSE3120 RSE6120 RSE5120 -	Weatherforce DV	Double sided fitted	1	ı	ı	ı	1	XE22	XE36	XESS	1	1
	Weatherforce B / WA	Self-adhesive sticker	RSE120	RSE2120	RSE3120	RSE6120	RSE5120	ı	I	ı	ı	ı
Self-adhesive sticker RSE23560X RSE2X RSE3X RSE6X	Day-Lite Ex-cel XXW	Self-adhesive sticker	RSE23560X	RSE2X	RSE3X	RSE6X	RSE5X	1	ı	1	ı	1

The standard 'Signs Directive' format is shown above. Other legend formats with different arrow directions, HTM65 format (below), BS 5499 mixed 'image/word' and foreign language variants are available by special request.



	Format			Single sided				Double sided	
		Self Assembly	Down	Left	Right	Пр	Down	Left/Right	dN
		□ ⑤ →	→	₩ →	1	(→ (5)	个 (5) (2) (2)	← E2 ←
Serenga SER	Screen printed (curved)		SER-SCN12	SER-SCN10	SER-SCN11	SER-SCN13			•
	Screen printed (normal)		SER-SNN12	SER-SNN10	SER-SNN11	SER-SNN13	•	•	•
Horizon OH	Screen printed		XEN2H	XEN3H	XEN6H	XENSH			
	Perspex screen printed		XEN20HS	XEN30HS	XEN60HS	XEN50HS	XEN22HD	XEN36HD	XEN55HD
Aqualux OW / STF	Screen printed (back-lit)		XENZW	XEN3W	XEN6W	XEN5W		•	•
	Self-adhesive (edge-lit)		RSENZW	RSEN3W	RSEN6W	RSEN5W	•	•	•
Previx PX	Screen printed		XEN2PX	XEN3PX	XEN6PX	XENSPX			
Way-Fer PLX	Self-adhesive sticker		RSENZPL	RSEN3PL	RSENGPL	RSENSPL	•	•	•
	Perspex screen printed		XENZPL	XEN3PL	XEN6PL	XENSPL	XEN22PLD	XEN36PLD	XEN55PLD
Silver-Lite ARV	Screen printed		XEN2A31	XEN3A31	XEN6A31	XEN5A31	XEN2/2A32	XEN3/6A32	XEN5/5A32
Endurance EM	Screen printed		ESSN12	ESSN10	ESSN11	ESSN13	EDSN21	EDSN20	EDSN22
Navigator Compact VE/ DVE	Screen printed		XEN2V31	XEN3V31	XEN6V31	XEN5V31	•	ı	ı
Navigator EE	Screen printed (white)		XEN2E31	XEN3E31	XEN6E31	XEN5E31		•	•
Silver-Scape RB	Screen printed		XEN2A31	XEN3A31	XEN6A31	XEN5A31	XEN2/2A32	XEN3/6A32	XEN5/5A32
Corniche NB	Screen printed		XEN2NT31	XEN3NT31	XEN6NT31	XEN5NT31	XEN2/2NT32	XEN3/6NT32	XEN5/5NT32
Weatherforce DV	Double sided fitted					ı	XEN2/2DV32	XEN3/6DV32	XEN5/5DV32
Weatherforce B / WA	Self-adhesive sticker		RSEN2120	RSEN3120	RSEN6120	RSEN5120			
Day-Lite Ex-cel XXW	Self-adhesive sticker	RSEN23560X	RSENZX	RSEN3X	RSEN6X	RSEN5X			

Central power supplies

Our Central Power Supply Systems division offers a choice of reliable and high quality products which are designed to meet the relevant standards and specifications for both AC/AC and AC/DC applications. The 'EMEX Power' and 'EMEX TS' static inverters, 'EMEX 110' AC/DC and 'Compact Power' product ranges are manufactured in our Leeds facility, supported by an experienced engineering, sales, and commissioning team.

EMEX - AC/AC Static inverter range: 220-230 V 50/60Hz

Static inverters in this range are true passive stand-by emergency lighting units, designed and built to exceed current emergency lighting standards and technical requirements, something with which most UPS based central power products do not comply.

EMEX Power, EMEX TS static inverters and EMEX Mini power systems offer a low maintenance and extremely reliable central power supply solution with low running costs and a high degree of functionality to serve individual customer needs.



- Modular design, which makes maintenance or repair a simple task
- Manufactured in the UK
- Normal mains luminaires with electronic starters/high frequency ballasts may be driven by the system (glow wire starters cannot be used in accordance with BS EN 60598.2.22)
- Ideal for task lighting projects where normal (high) lighting levels are required to minimise business disruption
- High efficiency: Low running cost
 - This AC/AC type of system has been designed for an inherently long service life with associated significant cost benefits over alternative emergency lighting solutions
- Cost conservancy and design
 - Ventilation fan life is maximised, as they will only operate when required, during 'battery charge' or 'inverter active' cycles
 - Battery life conserved by a temperature compensated constant voltage charger circuit in conjunction with passive stand-by inverter operation
- Functional features include sub-circuit monitoring, final exit input, MCB monitoring, M/NM operation (user selectable), fire alarm input and two volt-free common alarm outputs
- MCB protection devices are used throughout the equipment, eliminating the need for fuse spares
- Digital display for battery and output metering V & I
- Fully compliant with EN 50171 and ICEL1009
- EMEX TS includes integral touch-screen with EMEX Test capability



EMEX110 - AC/DC Central Power Supply Systems: 110 V



The 'EMEX110' range is available where the user preference is for an AC/DC system powering slave luminaires fitted with compatible inverter modules. The 110 V range is suitable for medium to large premises, including schools, supermarkets and other commercial or local authority properties.

Structurally, the type enjoys the modular design and all the standard features of the EMEX range.



Emergi-Lite EMEX AC/AC CPS systems are now kitemark approved to EN 50171 (Kitemark reference KM 542294).



EMEX Test

An optional innovative test facility is available for testing both the central power supply system and emergency lighting luminaires linked to it. The 'EMEX Test' hardware and software has been developed to produce an advanced, reliable and functional system at comparatively low cost.

Data communication to the luminaires being fed from the inverter is available in two forms depending on user choice. Either a Data Bus version utilising a single pair data cable or a line borne data signal imposed onto distributed AC power is available.

- Both the central power supply and luminaires are addressable
- Programmable: To perform timed tests during 'out of hours' periods for minimal disruption to everyday core business
- Any failure is recorded to a printable log file
- User interface: A standard PC with printer or door mounted touch-screen
- Networking facility: Up to 256 separate systems can be networked for testing from a single PC
- Remote access: Test results can be viewed remotely via computer network/internet
- A substation (MXC) is used to control up to 40 luminaires
- Additionally, any standard luminaire can be converted for use with substations using a small LTC interface module







Compact power AC/DC Central Power Supply Systems

Light and medium duty 24 V or 50 V for smaller premises or replacement work.

Full range of options available to suit site and customer requirements.



For a project assessment, design and quotation please contact a member of our internal Technical Sales or Field Sales Team. We will be able to offer the most suitable equipment for your local requirement.



EMEX Central Power Supply Systems Catalogue



This catalogue delivers an in-depth appraisal of the range of EMEX Central Power Supply Systems manufactured by Emergi-Lite, including AC/AC static inverters, AC/DC systems and 110 V supply solutions, plus the accompanying luminaires available to complete emergency lighting provision.

This catalogue is available from Emergi-Lite on +44 (0)113 281 0600.

Naveo remote emergency lighting management and monitoring



Detailing the innovative Naveo central addressable testing solution with remote, cloud-based, reporting and monitoring. The brochure explains in full the clear benefits of specifying and installing Naveo to significantly reduce the burden of emergency lighting testing.

This brochure is available from Emergi-Lite on +44 (0)113 281 0600.

Log Book: Emergency Lighting



The Emergency Lighting Standard, BS 5266 part 8, calls for periodic testing over the life of the emergency luminaire. Records of the tests are required. The Emergi-Lite spiral bound Log Book is handy and robust for this purpose, and also provides some useful notes and advice on the standard and the test process.

Order	Description	List	Price
Code		Price	Code
YLB-EL906	Log book - Emergency Lighting	£15.00	С

Log Book: Fire Detection and Alarm Systems



This A4 booklet, spiral bound and with hard backing, provides general guidance and advice as a supplement to BS 5839-1:2002. Space is provided for recording component lists, systematic logs, for making detailed weekly test reports and noting any modifications to the system in place.

Order	Description	List	Price
Code		Price	Code
YLB-FD906	Log book - Fire Detection	£15.00	С

Emergency Lighting Guide: An Authoritative Guide to Emergency Lighting



This guide provides key guidance on the various emergency lighting systems available, and their application and management in accordance with the latest BS EN and IEC standards.

Order Code	Page	Order Code	Page	Order Code	Page	Order Code	Page
AE01 AE04	48 48	OW/BCM OW/BWA	34-35, 37-38 34-35, 37-38	SER-DSB-R230LTC SER-DSB-RM3	18, 23 18, 23	XE03W XE055A32	34-35, 94 94
AE05 AE06	48 48	OW/BWM OW/DSC	34, 36-38 34, 36	SER-DS-R230 SER-DS-R230LTC	18, 23 18, 23	XE055NT32 XE055PL	94 94
AR011 AR041	49 49	OW13161HF OW13161LTC	34, 37 34, 37	SER-DS-RM3 SER-DSS-R230	18, 23 18, 23	XE05A31 XE05E31	48, 54, 94 53, 94
AR051 AR061	49 49	OW16161HF OW16161LTC	34, 37 34, 37	SER-DSS-R230LTC SER-DSS-RM3	18, 23 18, 23	XE05E4 XE05H	53, 94 27-28, 94
AR2LS AR3LS	49 48-49	OW1L261HF OW1L261LTC	34-35 34-35	SER-DWB-R230 SER-DWB-R230LTC	18, 21 18, 21	XE05NT31 XE05PL	56, 94 46, 94
ARV23 ARV33	49 48-49	OW23161 OW26161	34, 37 34, 37	SER-DWB-RM3 SER-DW-R230	18, 21 18, 21	XE05PX XE05V31	41, 42, 94 52, 94
B2311 B2LS1	58 58	OW33161 OW36161	34, 37 34, 37 34, 37	SER-DW-R230LTC SER-DW-RM3	18, 21 18, 21	XE05V31 XE05W XE06A31	34-35, 94 48, 54, 94
B3311 B3LS1	58 58	OW3L261 OW3L261LS	34-35 34-35	SER-DWS-R230 SER-DWS-R230LTC	18, 21 18, 21 18, 21	XE06E31 XE06E4	53, 94 53, 94
B4321 BBZ	58 57-58	OZ13161HF OZ13161LTC	27, 30 27, 30	SER-DWS-RM3 SER-FB2	18, 21 18, 21 13, 16	XE06H XE06NT31	27-28, 94 56, 94
BK XL BWG	41 58	OZ113161ETC OZ1L261HF OZ23161	27, 30 27-28 27, 30	SER-FB4	13, 16 13, 16 13-14	XE06PL XE06PX	46, 94 41, 42, 94
CLQ/BKA CLQ/BKB	63 63	OZ33161 OZ3L261	27, 30 27, 30 27-28	SER-FE2D SER-FE4D SER-FS2D	13-14 13-14 13, 15	XE06V31	52, 94
CLQ/BRB CLQ/GA CLQ/GB	63 63	OZD1LS61HF OZD3LS61	27, 29 27, 29 27, 29	SER-FS4D	13, 15 13, 15 13-16	XE06W XE20HS	34-35, 94 27, 29, 94
CLQ/SA	63 63	PL/BCM PL/BPM	45, 47 45-47	SER-M3-003 SER-RKIT1000	13-15	XE30HS XE36HD	27, 29, 94 27, 29, 94 27, 29, 94
CLQ/SB CLQ/SR CLQ/WA	62-63	PL/WG	45, 47 45, 47 45-47	SER-RKIT150 SER-RKIT300	13-15 13-15	XE50HS XE55HD	94
CLQ/WB	63 63	PL2LS1 PL3LS1	45-47	SER-RKIT500 SER-SA230-11	13-15 18, 20	XE60HS XEN2/2A32	27, 29, 94 95
CLQ28M CLQ28NM	62 62	PLX23111 PLX33111	45-47 45-47	SER-SA230-33 SER-SA230-66	18, 20 18, 20	XEN2/2A32 XEN2/2DV32	95 95
CLQ28PHF CPW/BZ	62 64	PWL113E PX/BCM	65 41	SER-SA230LTC-11 SER-SA230LTC-22	18, 20 18, 20	XEN2/2NT32 XEN20HS	95 95
CPW28M CPW28NM	64 64	PX/BWM PX/DSLKIT	41 42	SER-SA230LTC-33 SER-SAM3-11	18, 20 18, 20	XEN22HD XEN22PLD	95 95 95
CPW28PHF DE3311	64 53	PX/LENS4 PX1LS1HF	41, 43 41-43	SER-SAM3-22 SER-SAM3-33	18, 20 18, 20	XEN2A31 XEN2A31	95 95 95
DVE3311 DV3311XE22	52 57	PX1LS1LTD PX3LS1	41-43 41-43	SER-SC010 SER-SC011	13, 15-16, 94 13, 15-16, 94	XEN2E31 XEN2H	95
DV3311XE36 DV3LS1XE22	57 57	PXR1LS1HF PXR1LS1LTC	42, 43 42, 43	SER-SC012 SER-SC013	13, 15-16, 94 13, 15-16, 94	XEN2NT31 XEN2PL	95 95
DV3LS1XE36 EDS020	57 50, 94	PXR3LS1 RB00	41-43 55	SER-SC802 SER-SC803	13, 15-16, 94 13, 15-16, 94	XEN2PX XEN2V31	95 95 95 95
EDS021 EDS022	50, 94 50, 94	RB2311 RB2LS1	55 55	SER-SCN10 SER-SCN11	95 95	XEN2W XEN3/6A32	95 95
EDSN20 EDSN21	95 95	RB3311 RB3LS1	54-55 54-55	SER-SCN12 SER-SCN13	95 95	XEN3/6A32 XEN3/6DV32	95 95 95
EDSN22 EE3311	95 53	RE00 RSE 2PL	54 45, 94	SER-SE230-11 SER-SE230-22	18-19 18-19	XEN3/6NT32 XEN30HS	95
EE4323 EM3-001	53 50	RSE 3PL RSE 5PL	45, 94 45, 94	SER-SE230-33 SER-SE230LTC-11	18-19 18-19	XEN36HD XEN36PLD	95 95
EMF-001 EMH-001	51 51 51	RSE 6PL RSE120	45, 94 58, 94	SER-SE230LTC-22 SER-SE230LTC-33	18-19 18-19	XEN3A31 XEN3A31	95 95 95 95
EMR1000-001 EMR300-001 EMR500-001	51 51	RSE2120 RSE2W RSE2W/RSE2W	58, 94 34, 36, 94	SER-SEM3-11 SER-SEM3-22	18-19 18-19 18-19	XEN3E31 XEN3H	95 95
EMS-001 EMV-001	51 51 51	RSE2W/RSE2W RSE2X RSE3120	34, 36, 94 59, 94 58, 94	SER-SEM3-33 SER-SN010	13-14, 94	XEN3NT31 XEN3PL	95 95 95
ENV50-001 ESS010	50 50, 94	RSE3W RSE3W/RSE6W	34, 36, 94 34, 36, 94	SER-SN011 SER-SN012	13-14, 94 13-14, 94 13-14, 94	XEN3PX XEN3V31	95
ESS011 ESS012	50, 94 50, 94 50, 94	RSE3X RSE5120	59, 94	SER-SN013 SER-SN802	13-14, 94	XEN3W XEN5/5A32	95 95 95
ESSO12 ESSN10	50, 94 50, 94 95	RSE5W	58, 94 34, 36, 94 59, 94	SER-SN803 SER-SNN10	13-14, 94 95 95	XEN5/5A32 XEN5/5DV32	95 95 95
ESSN11 ESSN12	95 95	RSE5X RSE6120 RSE6W	58, 94 58, 94 34, 36, 94	SER-SNN11 SER-SNN12 SER-SNN13	95 95	XEN5/5NT32 XEN50HS	95 95
ESSN13 ETUNM3-005	95 70	RSE6X	59, 94	STF13161HF	34, 38	XEN55HD XEN55PLD	
HL1553 HL203E3	68 69	RSEN120 RSEN2120 RSEN23560X	95 95 95	STF13161HF STF23161 STF26161	34, 38 34, 38 34, 38	XEN5A31 XEN5A31 XEN5E31	95 95
HL551 HL551E3	68 69	RSEN2PL RSEN2W	95 95	STF33161	34, 38	XEN5H	95 95
HL551PC HLWG	68 67-68	RSEN2X	95	STF36161 VE3311 VE3315	34, 38 52 52	XEN5NT31 XEN5PL XEN5PX	95 95 95 95 95 95 95 95 95
HV203 HVBC	67 67	RSEN3120 RSEN3PL RSEN3W	95 95 95	VE3317	52	XEN5V31	95 95
IR2-TESTWARE™ IR2-TX	77 77 77	RSEN3X RSEN5120	95 95	VE3LS1 VEBACK	52 52 58	XEN5W XEN60HS	95 95
LR2L1A LR2L1E	61 61	RSEN5PL RSEN5W	95 95	VRKIT WA2321 XE02/2A32	58 48, 54, 94	XEN6A31 XEN6A31	95 95
LR3L1A LR3L1E	61 61	RSEN5X RSEN6120	95 95	XE02/2NT32 XE022PL	56, 94 46, 94	XEN6E31 XEN6H XEN6NT31	95 95 95 95 95
LS2L1A LS2L1E	60 60	RSEN6PL RSEN6W	95 95	XE02271 XE02A31 XE02E31	48, 54, 94 53, 94	XEN6PL XEN6PX	95
LS3L1A LS3L1E	60 60	RSEN6X SER-230-003	95 13-16	XE02E4 XE02H	53, 94 53, 94 27-28, 94	XEN6V31 XEN6W	95 95
NB/BFM07 NB/BWM07	56 56	SER-230LTC-003 SER-BZKIT	13-16 13-15	XE02H XE02NT31 XE02PL	56, 94 46, 94	XLF802H XLF802HS	27-28, 94 27, 29, 94
NB3311 NB3314	56 56	SER-DAB-R230 SER-DAB-R230LTC	18, 22 18, 22	XE02PX XE02V31	41, 42, 94	XLF802W XLF803H	34-35, 94 27-28, 94
NB3315 OH/BCM	56 27-28	SER-DAB-RM3 SER-DA-R230	18, 22 18, 22 18, 22	XE02V31 XE02W XE03/6A32	52, 94 34-35, 94 48, 54, 94	XLF803HS XLF803W	27, 29, 94 34-35, 94
OH/BWM OH/WG	27, 29-30 27-28, 30	SER-DA-R230LTC SER-DA-RM3	18, 22 18, 22 18, 22	XE03/6NT32 XE036PL	56, 94 46, 94	XP2312 XP4322	71 71
OH13161HF OH13161LTC	27, 30 27, 30 27, 30	SER-DAS-R230 SER-DAS-R230LTC	18, 22 18, 22	XE03A31 XE03E31	48, 54, 94 53, 94	XTR XW2LS11	59
OH1L261HF OH23161	27-28 27, 30	SER-DAS-RM3 SER-DBZ5-AL	18, 22 18, 21-23	XE03E31 XE03E4 XE03H	53, 94 53, 94 27-28, 94	XW3LS11 XW3LS11 XXW23111	59 59 59
OH33161 OH3L261	27, 30 27-28	SER-DBZ5-BR SER-DBZ5-SI	18, 21-23 18, 21-23	XE03NT31 XE03PL	56, 94 46, 94	XXW33111 YFAG-606	59 59 98 98
OHD1LS61HF OHD3LS61	27, 29 27, 29	SER-DBZ5-WH SER-DSB-R230	18, 21-23 18, 23	XE03PX XE03V31	41, 42, 94 52, 94	YLB-EL906 YLB-FD906	98 98
			•		•		

Product selection chart

		PLAN			п	NSTAL		MANAGE								REN	EW			
		Low energy LED	Project-wide application	High ceiling application	In-built Self-Test	Choice of trims	Modular design	First-fix installation	Mounting options	External use	Night / security lighting	Light sensor	Low temperature	Long-life performance	Dimmable lighting	Low maintenance LED	Extended warranty (2yr+)	Retrofit LED geartray	Testing system upgrade	See Pages
SERENGA		~	~		~		~	~	~		~			~	~	~	~		~	12 - 16
SERE		~	~		~	~	~	~	~		~			~	~	~	~		~	17 - 23
PREVIX AQUALUX HORIZON		~	~		•		~	•	•		~			•		•	/	/	/	24 - 30
AQUALUX		~	~	~	~		~	~	•	~	~	•	~	~		~	~	~		31 - 38
PREVIX		~	~		~		~	~	•		~			~		•	•		~	41 - 43
		~	~		~				~	~				~		~			~	45 - 47
	The second	~	~			~								~		~			~	48 - 49
	103	~			~		~	~	~					~		~			~	50 - 51
		~												~		~			~	52 - 53
"		~												~		~			~	54 - 55
ESCAPE LINE	ress.					~								~		~			~	56
_		~								~				~		~			~	57 - 59
		~		~					•		~			~		•				60 - 61
						~													~	62 - 63
	<u> </u>									~									~	64
	4	~			~					~				•		•				65
7				~						~									✓	67 - 69
INDUSTRIAL					~					~				~						70
										~										71



At Thomas & Betts, our focus is on improving your business performance by providing practical, reliable electrical products and services that connect and protect for life and solve everyday problems in the areas of Wire & Cable Management, Cable Protection, Power Connection & Control and Safety Technology. Our extensive engineering, supply chain management and technical sales support teams are committed to understanding everything that impacts your ability to accomplish your business objectives by reducing your total cost of ownership.









T&B° Cable Tray



E-Klips™



ENERGY & DATA CONNECTION

Thomas&Betts CABLE PROTECTION SYSTEMS











ENERGY & DATA PROTECTION

Thomas@Betts POWER CONNECTION & CONTROL















CRITICAL PROCESS PROTECTION

Thomas@Betts SAFETY TECHNOLOGY









PEOPLE PROTECTION



UK OFFICE

LS27 9LL

United Kingdom

Thomas & Betts Limited
Emergi-Lite Safety Systems
Bruntcliffe Lane
Leeds
West Yorkshire

Tel +44 (0)113 281 0600 Fax +44 (0)113 281 0601 emergi-lite.sales@tnb.com www.emergi-lite.co.uk

EUROPEAN HEADQUARTERS

Thomas & Betts 200 Chaussée de Waterloo B-1640 Rhode-St-Genèse Belgium

Tel +32 (0)2 359 8200 Fax +32 (0)2 359 8201

MIDDLE EAST OFFICE

Thomas & Betts Ltd. Br.
Office 724 6WA West Wing
Dubai Airport Free Zone
PO Box 54567
Dubai
United Arab Emirates

Tel +971 (0)4 609 1635 Fax +971 (0)4 609 1636

emergi-lite-salesme@tnb.com

SOUTH EAST ASIA OFFICE

Thomas & Betts Asia (Singapore) Pte Ltd 10 Ang Mo Kio Street 65 #06-07 Techpoint Singapore 569059

Tel +65 6720 8828 Fax +65 6720 8780

asia.inquiry@tnb.com

www.tnb.com/uk www.tnb-europe.com

The content of this Thomas & Betts catalogue has been carefully checked for accuracy at the time of print. However, Thomas & Betts doesn't give any warranty of any kind, express or implied, in this respect and shall not be liable for any loss or damage that may result from any use or as a consequence of any inaccuracies in or any omissions from the information which it may contain. E&OE.

Copyright Thomas & Betts 2013. Copyright in these pages is owned by Thomas & Betts except where otherwise indicated. No part of this publication may be reproduced, copied or transmitted in any form or by any means, without our prior written permission. Images, trade marks, brands, designs and technology are also protected by other intellectual property rights and may not be reproduced or appropriated in any manner without written permission of their respective owners. Thomas & Betts reserves the right to change and improve any product specifications or other mentions in the catalogue at its own discretion and at any time. These conditions of use are governed by the laws of the Netherlands and the courts of Amsterdam shall have exclusive jurisdiction in any dispute.

