

B.E.G. KNX



▪ www.beg-luxomat.com ▪

KNX SOLUTIONS FOR INTELLIGENT BUILDING CONTROL



| | |
|--|----------------------|
| | Rated current |
| | Typ. power input |
| | Detection area |
| | Switching power |
| | Range (approx.) in m |
| | Lux value |
| | Degree of protection |
| | Dimensions |
| | Ambient temperature |
| | Housing |
| | Display elements |
| | Manual operation |
| | Power supply |
| | Remote controllable |

Three steps to find the right device

1. Application

Page tabs sorted by use or application

2. Function

Product sequence by type description and functionality

3. Technical Data

Specification by technical data and detection area





Sensors **5 - 19**

- Outdoor motion detectors KNX BUS 7
- Ceiling occupancy detectors KNX BUS 8 - 14
- Wall occupancy detectors KNX BUS 15
- Push button interfaces 16
- Weather station 17



Built-in devices **20 - 33**

- Switch actuators 22 - 24
- Blind actuators 25 - 26
- Dimmer actuators 27
- KNX-RCT Room controller 28
- DALI/KNX Gateway 29
- KNXnet/IP Interface 30
- KNXnet/IP Interface Web 31
- Power supplies 32



Visualisation **33 - 35**

- Control Touch-Panel 35

Product listing **36**



B.E.G. Brück Electronic GmbH – a company with a tradition

Since 40 years, the family company founded in 1975 with its headquarters in Lindlar (near Cologne) stands for quality and innovation with customer satisfaction at its heart.

The foundation stone of the products within the comprehensive range was the development and production of emergency lights. Shortly thereafter the production of emergency lighting systems followed.

B.E.G. was one of the first companies in Germany to commence the production of motion detectors and automatic lights in 1986. Since then, **B.E.G.** has produced several generations of motion detectors mainly for outdoor use on buildings that help increase security. The growth in automated systems for buildings and the resulting increase in the demand for intelligent control led to an expansion in our range of daylight- and presence-dependent occupancy detection. The cost reduction through energy saving and the protection of the environment plus the additional comfort factor are strong arguments for the use of occupancy detectors.

The new purpose-built distribution and logistics centre with an attached production and development unit in Lindlar was commissioned in 2007.

In 2014, the new administration building has been built next to the distribution and production centre. Naturally, the new centre's building services are equipped with devices from the **B.E.G.** range: all rooms and passages are fitted with KNX occupancy detectors. For controlling DALI lights, occupancy detectors, blinds and light switches, the newly-developed KNX Room Controller RCT is used. The market for energy-efficient products, such as **B.E.G.**'s occupancy detectors, has been growing strongly for years. The new administration centre and its location next to the logistics centre offer the possibility to continue **B.E.G.**'s expansion.

In order to offer the customers a clear product structure, the product range has been divided into six product lines: **LUXOMAT®**, **LUXOMATIC®**, **B.E.G. KNX**, **B.E.G. SMARTHOME®**, **SAFETYLUX®** and **CHRONOLUX**. They emphasise **B.E.G.**'s strengths: a broad product range, individual solutions, outstanding quality, and personal service. **B.E.G. – The lighting control professionals.**

Today, **B.E.G.** has an excellent reputation all over Germany and internationally with a steadily increasing number of offices and representatives in many countries around the world.

Save energy in buildings effectively – with **B.E.G.** KNX



■ Only by means of sensors a KNX system can react adequately

An intelligent building is made with **B.E.G.** sensors

By means of KNX, several areas of a building can be linked. In order to be able to react to the surrounding conditions, sensors are used which enter these factors into the system.

Motion and occupancy sensors are first choice for controlling the lighting. **B.E.G.** offers KNX occupancy detectors for different ranges with up to 44 m in diameter and a detection area of 360°. **B.E.G.**'s broad product range offers detectors for almost every demand.

Besides controlling the lighting, a suitable occupancy detector also offers the possibility to control CVC systems depending on presence.

In order to allow the user to influence the system manually and to override the automatic control, pushbuttons can be integrated by means of flush-mounted push button interfaces.

The KNX weather station provides an elevated comfort. It enters all information on weather, brightness, temperature and – thanks to GPS – also the exact time into the system. All information can then be used to control, for example, the shading or the shutters.




Profit from a building automation reacting independently on the surrounding conditions.

KNX motion detectors for outdoor use

| Motion detector | Page | Part. no. | Wall installation | Ceiling installation | Outer corner installation | Corner socket | Motion detection | Range | Detection angle |
|----------------------|------|--------------------------------|-------------------|----------------------|---------------------------|---------------|------------------|-------|-----------------|
| RC-plus next 230 KNX | 7 | 92894 – white 92895 – black | ■ | ■ | □ | □ | ■ | 20 m | 230° |

□ Accessory necessary

KNX occupancy detectors for switching and dimming

| Occupancy detector | Page |  |  |  | Daylight measurement | Motion detection | Range | Additional functions |
|--------------------|------|---|---|---|----------------------|------------------|---------------|-----------------------|
| PD2-KNX | 8 | 92880 | 92881 | 92882 | ■ | ■ | Ø 10 m | – |
| PD4-KNX | 9 | 92883 | 92884 | 92885 | ■ | ■ | Ø 24 m | – |
| PD4-KNX-GH | 10 | 92889 | – | – | ■ | ■ | Ø 44 m | for high-bay storages |
| PD4-KNX-C | 11 | 92886 | 92887 | 92888 | ■ | ■ | Ø 40 m | Corridor detector |
| PD9-KNX | 12 | – | 92890 | – | ■ | ■ | Ø 10 m | Mini detector |
| PD9-KNX-GH | 13 | – | 92891 | – | ■ | ■ | Ø 6 m | for high-bay storages |
| PD11-KNX-FLAT | 14 | – | 92893 | – | ■ | ■ | Ø 8 m | – |
| Indoor 180-KNX | 15 | – | – | 92892 | ■ | ■ | max. r = 10 m | – |

Push button interfaces

| Push button interface | Page | Part. no. | Installation in 60 mm pattress boxes | Supply voltage | Number of inputs | Maximum number of binary outputs | Functions |
|-------------------------------|------|-----------|--------------------------------------|----------------|------------------|----------------------------------|---------------------------|
| KNX push button interface, 2x | 16 | 90130 | ■ | via KNX BUS | 2 | 1 | for switching and dimming |
| KNX push button interface, 4x | 16 | 90131 | ■ | via KNX BUS | 4 | 2 | for switching and dimming |

Weather station

| Weather station | Page | Part. no. | Light evaluation | Wind evaluation | Rain evaluation | GPS | Timeswitch |
|-----------------|------|-----------|------------------|-----------------|-----------------|-----|------------|
| KNX-WTS-GPS | 17 | 90221 | ■ | ■ | ■ | ■ | ■ |

Clearly structured and easy to operate menu for set-up




KNX RC-plus next 230 KNX



white

black




i PRODUCT INFORMATION

- KNX motion detector with integrated KNX bus connector
- Switching mode, control mode, slave mode, occupancy-independent regulating mode
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Set values and follow-up times can be changed for all channels using communication objects
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control
- Additional functions can be set via optional remote control
- Wall, ceiling and corner mounting
- Factory settings 3 min and 20 lux

■ TECHNICAL DATA

- 24 V DC from KNX BUS
- 7mA
- 230°
- max. 20 m when walking across (tangential)
- IP54 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux

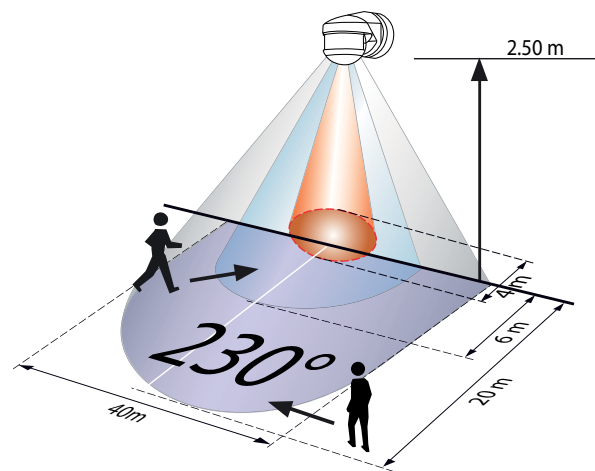

- Walking across
- Walking towards
- Anti-creep


| Description | Colour | Part number |
|--|--------------|--------------|
| RC-plus next 230 KNX | white | 92894 |
| RC-plus next 230 KNX | black | 92895 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Outside corner socket for RC-plus next | white/ black | 97004/ 97024 |
| Inside corner socket for RC-plus next | white | 97005 |
| Wire basket BSK (Ø 164 x 143 mm) | white | 92467 |

KNX PD2-KNX-SM/-FC/-FM

■ TECHNICAL DATA




FC

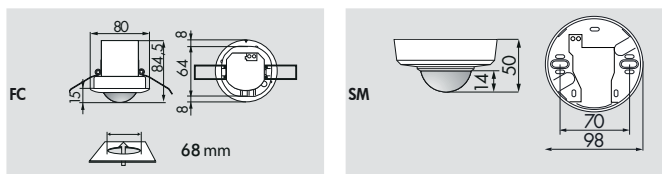

FC

SM




FM

i PRODUCT INFORMATION

- KNX occupancy detector with integrated KNX bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control


- 24 V DC from KNX BUS
- 7mA
- 360°
- Ø 10 m across
- Ø 6 m towards
- Ø 4 m seated
- IP □ FC= IP20 SM= IP20 FM= IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

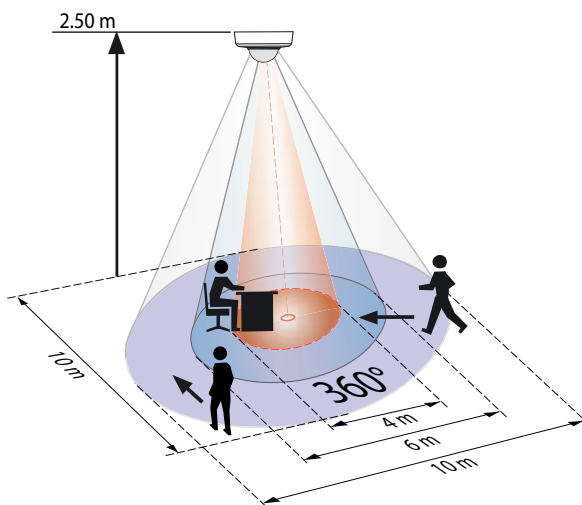

- Walking across
- Walking towards
- Seated activity

| Description | Colour | Part number |
|---------------------------------|--------|-------------|
| PD2-KNX-FC | white | 92881 |
| PD2-KNX-SM | white | 92880 |
| PD2-KNX-FM | white | 92882 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |
| Socket IP54 for PD2- and PD4-SM | white | 92161 |

KNX PD4-KNX-SM/-FC/-FM

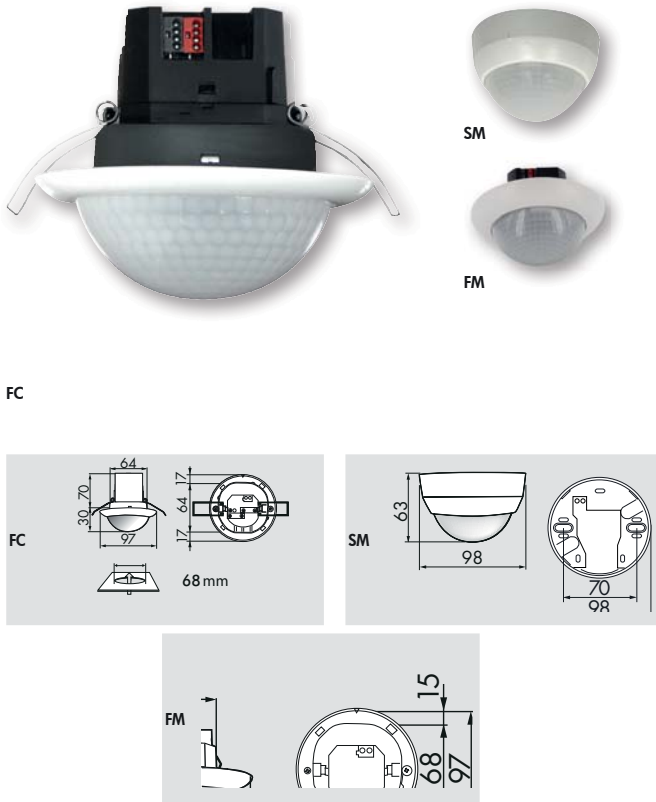

FC

FC

SM


FM

PRODUCT INFORMATION

- KNX occupancy detector with extended detection area and integrated KNX bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

■ TECHNICAL DATA

- 24 V DC from KNX BUS
 - 7mA
 - 360°
 - Ø 24 m across
Ø 8 m towards
Ø 6,4 m seated
 - FC= IP20 SM= IP20 FM= IP20 / Class II
 - 25 °C to +55 °C
 - Polycarbonate, UV- and shock resistant
 - IR adapter for Smartphones, IR-PD-KNX
 - 5 - 1200 Lux
- Mixed light measuring

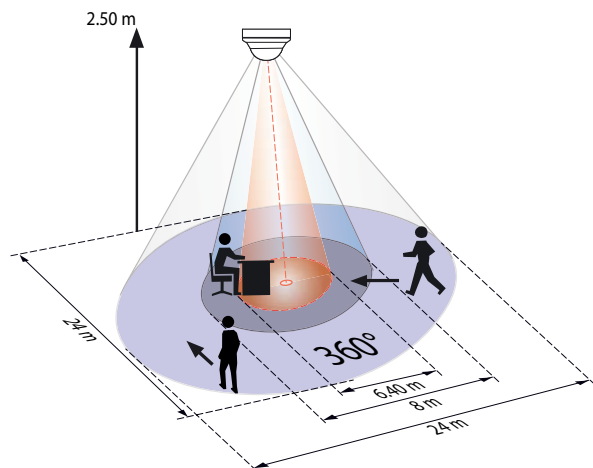


- Walking across
- Walking towards
- Seated activity

| Description | Colour | Part number |
|---------------------------------|--------|-------------|
| PD4-KNX-FC | white | 92884 |
| PD4-KNX-SM | white | 92883 |
| PD4-KNX-FM | white | 92885 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |
| Socket IP65 for PD4-SM | white | 92375 |
| Socket IP54 for PD2- and PD4-SM | white | 92161 |

KNX PD4-KNX-GH-SM



SM




SM

i PRODUCT INFORMATION

- KNX occupancy detector designed for high-bay warehouses, with integrated KNX bus connector
- When using the product database B.E.G. Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control
- **When used in high-bay warehouses, care should be taken that, in the cross-aisles of the warehouse, detectors are installed that can detect movement only in the desired aisle locations, by using blinds or other technical arrangements.**

■ TECHNICAL DATA

- 24 V DC from KNX BUS
- 7mA
- oval 360°
- max. Ø 30 m towards
max. Ø 44 m across
- Light control feasible up to 5 m
- IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

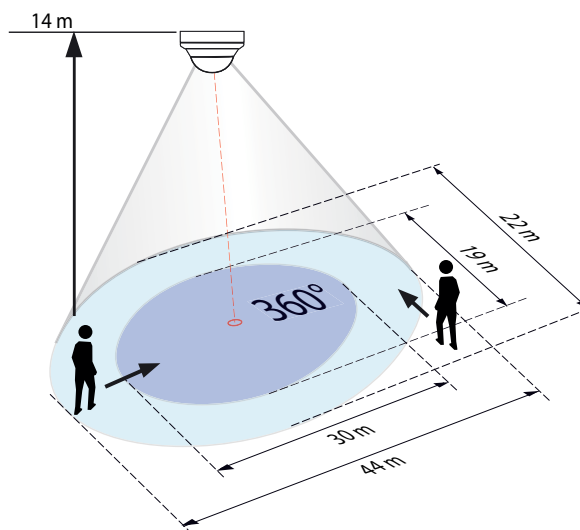


- Walking across
- Walking towards

| Description | Colour | Part number |
|---------------------------------|--------|-------------|
| PD4-KNX-GH-SM | white | 92889 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Socket IP65 for PD4-SM | white | 92375 |
| Socket IP54 for PD2- and PD4-SM | white | 92161 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |


KNX PD4-KNX-C-SM/-FC/-FM




FC



FC



SM




FM

PRODUCT INFORMATION

- KNX occupancy detector designed for corridors, with integrated KNX bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

■ TECHNICAL DATA

- 24 V DC from KNX BUS
- 7mA
- 360°
- Ø 40 m across
Ø 20 m towards
- Mandatory mounting height 2,4 m - 2,6 m
- FC= IP20 SM= IP20 FM= IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

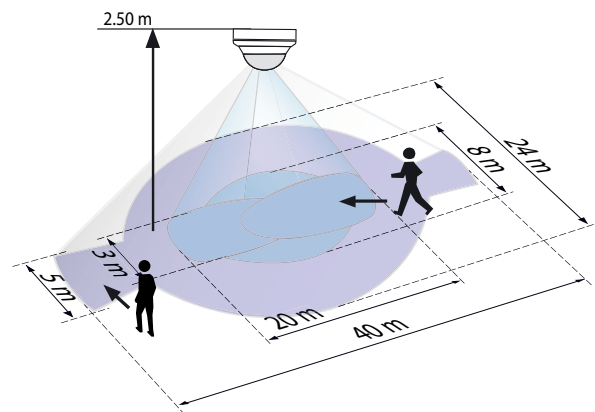


- Walking across
- Walking towards

| Description | Colour | Part number |
|---------------------------------|--------|-------------|
| PD4-KNX-C-FC | white | 92887 |
| PD4-KNX-C-SM | white | 92886 |
| PD4-KNX-C-FM | white | 92888 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |
| Wall bracket for PD4-SM | white | 92441 |
| Socket IP54 for PD2- and PD4-SM | white | 92161 |
| Socket IP65 for PD4-SM | white | 92375 |

KNX PD9-KNX-FC



„Size comparison“

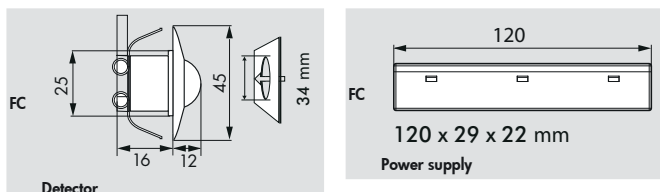


■ TECHNICAL DATA

- 24 V DC from KNX BUS
- 7mA
- 360°
- Ø 10 m across
- Ø 6 m towards
- Ø 4 m seated
- IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- 45 cm
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

i PRODUCT INFORMATION

- KNX mini occupancy detector with integrated bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control


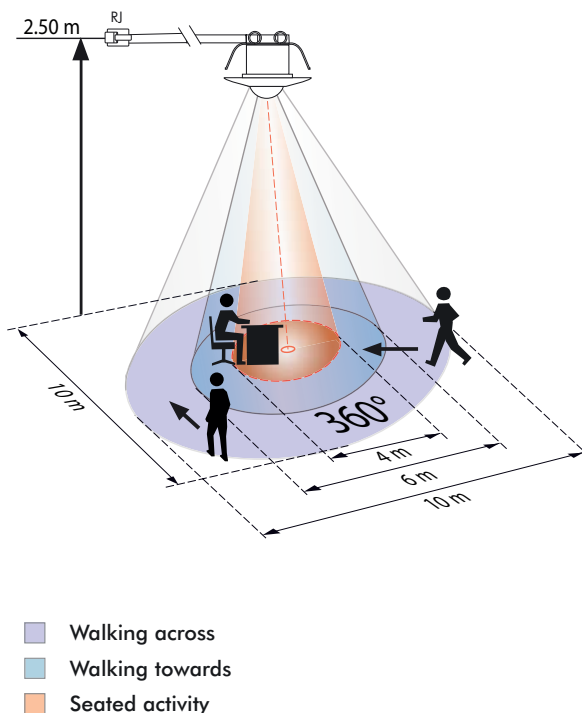


| Description | Colour | Part number |
|------------------------------|---------------------------|---------------------|
| PD9-KNX-FC | white | 92890 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Cover ring for PD9 (Ø 36 mm) | white/ silver/ anthracite | 92238/ 92237/ 92235 |
| Cover ring for PD9 (Ø 45 mm) | white/ silver | 92327/ 92346 |
| PD9-IP65-covering | - | 92958 |

KNX PD9-KNX-GH-FC



„Size comparison“




i PRODUCT INFORMATION

- KNX mini occupancy detector with integrated bus connector, for high-bay applications
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

■ TECHNICAL DATA

- 24 V DC from KNX BUS
- 7mA
- 360°
- max. Ø 6 m
- Light control feasible up to 5 m
- IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- 45 cm
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

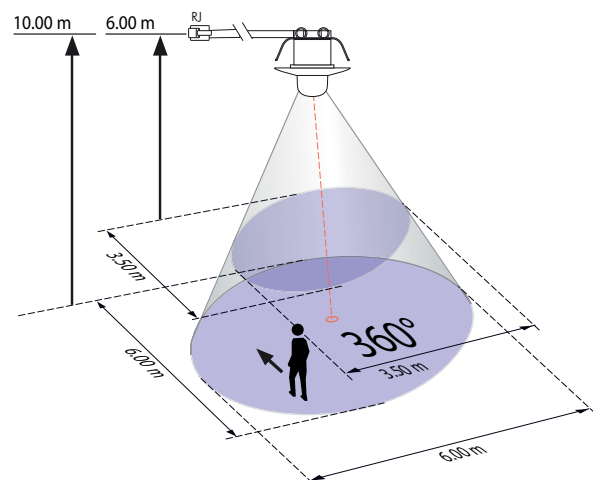


Walking across

| Description | Colour | Part number |
|------------------------------|---------------------------|---------------------|
| PD9-KNX-GH-FC | white | 92891 |
| Accessory (optional) | | |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |
| Cover ring for PD9 (Ø 36 mm) | white/ silver/ anthracite | 92238/ 92237/ 92235 |
| Cover ring for PD9 (Ø 45 mm) | white/ silver | 92327/ 92346 |

KNX PD11-KNX-FLAT-FC



FC




FC

PRODUCT INFORMATION

- Low profile KNX occupancy detector with integrated KNX bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control
- Spring clips for quick and easy installation in suspended ceilings

TECHNICAL DATA

- 24 V DC from KNX BUS
- 8mA
- 360°
- Ø 9 m across
- Ø 6 m towards
- Ø 3 m seated
- IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux
- Mixed light measuring

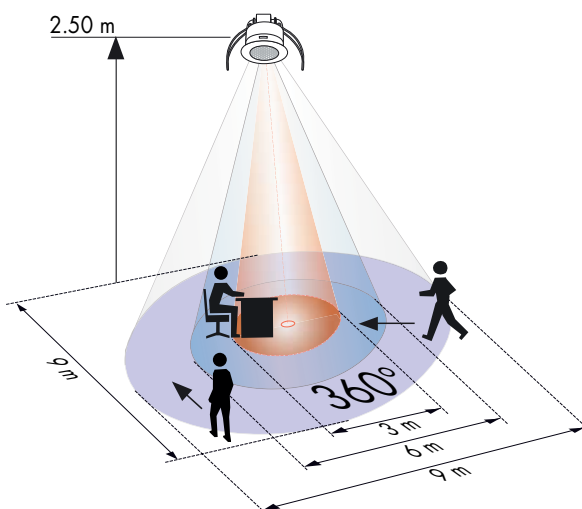


- Walking across
- Walking towards
- Seated activity

| Description | Colour | Part number |
|-----------------------------|--------|-------------|
| PD11-KNX-FLAT-FC | white | 92893 |
| Accessory (optional) | | |
| Cover ring | black | 92537 |
| IR-PD-KNX | grey | 92123 |
| IR adapter for Smartphones | black | 92726 |

KNX Indoor 180-KNX




EU version



PRODUCT INFORMATION

- KNX wall occupancy detector with integrated KNX bus connector
- When using the product database B.E.G._Praesenzmelder_928xx_V5.0, several operation modes are available:
 1. Full automatic mode
 2. Semi-automatic mode
 3. Slave mode
 4. Occupancy-independent regulating mode
- Up to three additional switching channels – selectively either daylight-dependent or not – for controlling lights, HVAC devices (with time delay) or for transmitting occupancy telegrams
- Set values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours, activatable via communication object or remote control, in order to profit from the entire operating time of the controlled lamps
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control
- For use with covering (interior cover dimensions 50x50mm) in 5 different colours

- 24 V DC from KNX BUS
- 7mA
- 180°
- max. 10 m
- max. mounting height 2.2 m
- IP20 / Class II
- 25 °C to +55 °C
- Polycarbonate, UV- and shock resistant
- IR adapter for Smartphones, IR-PD-KNX
- 5 - 1200 Lux

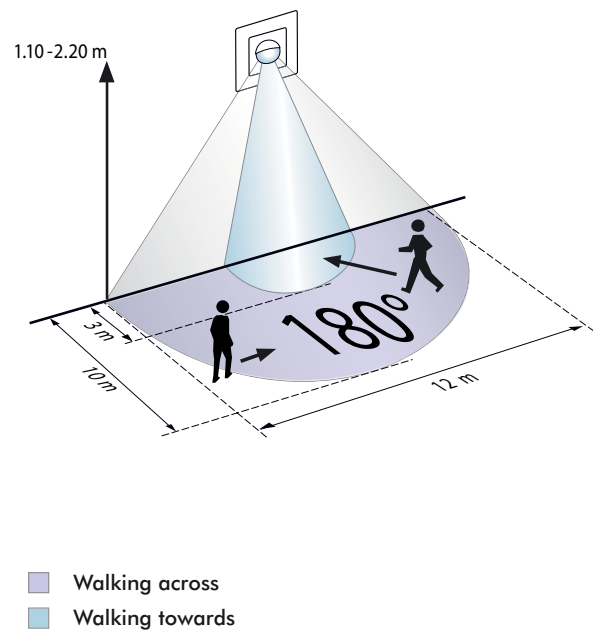


| Description | Colour | Part number |
|--|-------------------------|-------------|
| Indoor 180-KNX, covering not included | – | 92892 |
| Accessory (optional) | | |
| Indoor 180 socket for wallmounting, IP54 | pure white, RAL 9010 | 92141 |
| Lock for cover cap of Indoor 180 | – | 92018 |
| Centre plate for modular push button (angled corners) | pure white, RAL 9010 | 35126 |
| Centre plate for modular push button (rounded corners) | pure white, RAL 9010 | 35127 |
| Covering IP20 | pure white, RAL 9010 | 92630 |
| Covering IP20 | oyster white, RAL 1013 | 92632 |
| Covering IP20 | silver, RAL 9006 | 92633 |
| Covering IP20 | anthracite, RAL 7021 | 92634 |
| Covering IP20 | traffic white, RAL 9016 | 92631 |
| Frame IP54 for Indoor 180, white | pure white, RAL 9010 | 92139 |






KNX KNX push button interface



2x




■ TECHNICAL DATA

-  24 V DC from KNX BUS
-  IP20 / Class II
-  -25 °C to +55 °C
-  Plastic LEXAN UL-94-V0
-  Programming LED
-  Programming key

i PRODUCT INFORMATION

- Binary input or output device (push button interface) for pattress boxes (60 mm)
- Programmable behaviour in the event of BUS power failure or BUS resumption
- Switching and dimming function
- Blind control
- Linking of up to 50 group addresses possible
- User-friendly ETS interface
- Two or four inputs for dry push button or switch contacts
- Two or four binary outputs for the activation of control lamps - low current LEDs (I = 2mA)

| Description | Colour | Part number |
|-------------------------------|--------|-------------|
| KNX push button interface, 2x | white | 90130 |
| KNX push button interface, 4x | white | 90131 |

KNX KNX-WTS-GPS***i* PRODUCT INFORMATION**

- Weather station with sensors, evaluation electronics and bus connection in a compact housing
- Values can be used to control threshold-depending switching outputs
- Detection of the position of the sun via GPS signal (azimuth and elevation) for an automatic control of the sun shielding
- Measuring of the ambient light (output of the measured value in Lux)
- Integrated measuring of wind speed (without wind wheel) with adjustable threshold for wind alarm
- Detection of precipitation with adjustable precipitation alarm
- Measuring of temperature
- Weekly and yearly time switch
- Eight AND- and eight OR-gates

■ TECHNICAL DATA

KNX BUS 24V DC
12-40V DC or 12...28V AC V



IP44 / Class II



-30 °C to +50 °C




Polycarbonate, UV- and shock resistant

| Description | Colour | Part number |
|-------------|--------|-------------|
| KNX-WTS-GPS | white | 90221 |

General

- Technical Data:
 - **Size:** L80 x W60 x D8mm
 - **Battery:** Lithium CR2032, 3 Volt (included)
 - **Range:** cloudy or dark: 5-6 m, direct sunlight: 2-3 m



Programming function overview

| | |
|--|--|
| | Programming mode Open/Close blocks the functioning of the remaining buttons after successful setting |
| | Read-in function Storage of current light value as set value |
| | Brightness value Adjustable from 20 to 1000 lux, Recommendation: Rooms with daylight 300 lux, rooms without daylight 1000 lux |
| | Activation / Deactivation of burn-in function |
| | Dimming for adjusting the set value, store with "eye" button |
| | Follow-up time for adjusting the duration for the lights to stay on |
| | For changing operating function ON = full automatic mode OFF = semi-automatic mode |
| | Activation / Deactivation of the corridor function (time adjustable) |
| | Activation / Deactivation of the LED indicating movement |
| | Activation of the programming mode |
| | Test mode For testing the detection area with a walk test |
| | RESET Reset all functions to ETS settings |

LUXOMAT® IR-PD-KNX



SUITABLE FOR:

- PD2-KNX
- PD4-KNX
- PD4-KNX-GH
- PD4-KNX-C
- PD9-KNX
- PD9-KNX-GH
- PD11-KNX-FLAT
- RC-plus next 230 KNX
- Indoor 180-KNX

| Description | Color | Part. no. |
|-------------|-------|-----------|
| IR-PD-KNX | grey | 92123 |

LUXOMAT® IR-ADAPTER FOR SMARTPHONES




SUITABLE FOR:

- all detectors with receiving diode

| Description | Color | Part. no. |
|----------------------------|-------|-----------|
| IR adapter for Smartphones | black | 92726 |

Blinds for B.E.G. motion detector

- LUXOMAT® RC-plus next (limitation of detection angle) – Part no. 32697




RC-plus next with blinds

Blinds for B.E.G. occupancy detector

- LUXOMAT® PD2-SM+FM – Part. no. 92260



The blinds have predetermined breaking points at regular distance. The detection area can therefore be accurately adapted to your needs.



PD2-SM




PD2-SM with blinds


- LUXOMAT® PD4-SM+FC+FM – Part. no. 92313



The blinds have predetermined breaking points at regular distance. The detection area can therefore be accurately adapted to your needs.



PD4-FM



PD4-FM with blinds

- LUXOMAT® Mini motion detector PD9 – Part. no. 32702 and PD9-GH for large mounting heights – Part. no. 33207



PD9-DE



PD9-DE with blinds



PD9-GH-DE



PD9-GH-DE with blind

- LUXOMAT® PD9-IP65-covering – Part.-no. 92958




PD9-IP65-covering

- LUXOMAT® Indoor 180 – Part. no. 92294




- for adapting the detector's detection area to the local circumstances

- LUXOMAT® PD11-FC – Part.-no. 38522



PD11-FC



PD11-FC with blinds

- LUXOMAT® Indoor 180 – Part. no. 33233 and part. no. 92028



- to mask detection below the mounting height (to prevent small animals from being detected)



- lock for protecting the upper cover cap against unwanted removal



Indoor 180 with blind

- LUXOMAT® Indoor 180 – Part. no. 35126




- Centre plate for installing a sensor insert Indoor 180 in a modular push button Dimensions: 55 x 55 mm, angled corners

- LUXOMAT® Indoor 180 – Part. no. 35127



- Centre plate for installing a sensor insert Indoor 180 in a modular push button Dimensions: 55 x 55 mm, rounded corners

- Blinds allow the detection area of the sensor to be adapted to local conditions. Sources of interference or areas where monitoring is not required can thus be excluded from motion detection. Blinds are supplied in the packaging, and can also be ordered separately if more are needed.

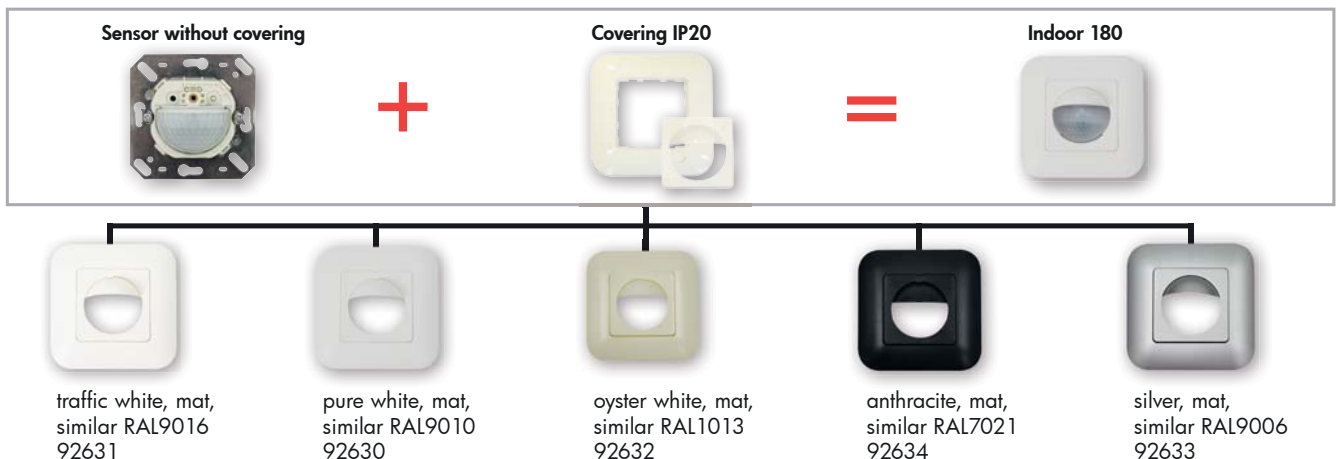

BUILT-IN DEVICES

KNX – The intelligent route to secure, convenient and profitable building automation systems



- The **B.E.G.** solution for building automation and intelligent living

Invisible components

Built-in KNX components are mostly invisible to the user, but perform important functions in the KNX system:

The complete KNX system takes its power from the KNX bus, for which the **B.E.G.** power supply converts 230V into 30 VDC. To access the system, a KNXnet/IP interface is required. This is the interface between the KNX ETS software and the devices in the system. Additional options such as devices with integrated webservers make the system even more convenient.

Additional devices are then controlled via the interface. Actuators provide reliable control of KNX systems. Eight or 16 devices can be switched with one switch actuator, for example household electricals, HVAC installations or lighting.

For both switching and control of lighting on demand, the dimming actuator can be used as a 1-10V electronic ballast. In addition, a DALI system can be integrated into the KNX system via a KNX/DALI Gateway. In this way, an intelligent lighting system can be built up using ETS.

Additionally, blind actuators allow convenient control of solar protection, for example using weather data from the KNX weather station.

The KNX-RCT Room Controller offers quick and easy installation: a DALI Gateway and two pushbutton interfaces are already built in. The plug-in terminals allow the KNX system, for example of an office, to be wired directly in the ceiling.

Overview of KNX Actuators

| Actuator | Page | Part. no. | DIN rail | Supply voltage | Number of outlets | Size | Functions | Special functions |
|-------------------|------|-----------|----------|----------------|-------------------|------|------------------|----------------------|
| KNX SA-8C- 230 V | 22 | 90200 | ■ | 230 VAC/ 50Hz | 8 | 4TE | Switch loads | – |
| KNX SA-16C- 230V | 22 | 90201 | ■ | 230 VAC/ 50Hz | 16 | 8TE | Switch loads | – |
| KNX SA-8C-230V-CL | 23 | 90209 | ■ | 230 VAC/ 50Hz | 8 | 8TE | Switch loads | – |
| KNX SA-8C-EM | 24 | 90210 | ■ | 230 VAC/ 50Hz | 8 | 8TE | Switch loads | Current measurement |
| KNX SBA-4C-230V | 25 | 90190 | ■ | 230 VAC/ 50Hz | 4 | 4TE | Control shutters | – |
| KNX SBA-4C-24 V | 26 | 90191 | ■ | 24 VAC/ 50 Hz | 4 | 4TE | Control shutters | for 24 V DC-shutters |
| KNX SBA-8C-230V | 25 | 90192 | ■ | 230 VAC/ 50Hz | 8 | 8TE | Control shutters | – |
| KNX CD-4C | 27 | 90180 | ■ | 230 VAC/ 50Hz | 4 | 4TE | Dimming 1-10 V | – |

SA = Switching Actuator
SBA = Switching Blind Actuator
CD = Control device 1-10 V

XC = Channel
CL = Capacitive load
EM = E-metering

Overview KNX Room Controller

| Room Controller | Page | Part. no. | DIN rail | Supply voltage | Connections |
|-----------------|------|-----------|----------|-----------------|---|
| KNX-RCT | 28 | 92979 | – | 230 VAC and BUS | KNX-BUS, DALI-BUS, 230V, 2 push buttons, Occupancy detector |

Overview of DALI/KNX Gateway

| Gateway | Page | Part. no. | DIN rail | Supply voltage | DALI-Programming Tool | Number of DALI-EBs | Size | Additional functions |
|-----------------------|------|-----------|----------|-----------------------------|-----------------------|--------------------|------|----------------------|
| DALI/KNX Gateway IP-N | 29 | 90134 | ■ | 110 - 240VAC/ 50 - 60 Hz | □ | 64 | 4TE | – |

Overview of KNXnet/IP Interfaces

| KNXnet/IP Interface | Page | Part. no. | DIN rail | Supply voltage | Display | Integrated Webserver | Size | Functions | Special functions |
|-------------------------|------|-----------|----------|--------------------------------|---------|----------------------|------|-------------------|--------------------------|
| KNXnet/IP Interface | 30 | 90125 | ■ | 12 - 30VAC/DC external and BUS | – | – | 4TE | BUS access via IP | – |
| KNXnet/IP Interface Web | 31 | 90126 | ■ | 12 - 30VAC/DC external and BUS | – | – | 4TE | BUS access via IP | Web server visualisation |

Overview of power supplies

| System devices | Page | Part. no. | DIN rail | Supply voltage | Nominal rated current | Maximum rated current | Number of participants | Separate 30 VDC outlet | Size |
|----------------|------|-----------|----------|------------------|-----------------------|-----------------------|------------------------|------------------------|------|
| KNX PS-160 mA | 32 | 90211 | ■ | 230 VAC/ 50Hz | 160 mA | 350 mA | 16 | – | 4TE |
| KNX PS-640 mA | 32 | 90212 | ■ | 230 VAC/ 50Hz | 640 mA | 1300 mA | 64 | ■ | 6TE |


PS = Power Supply

KNX KNX SA-8C / 16C-230 V



8 C

16 C

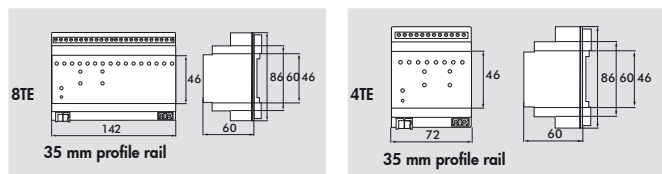

8TE

4TE

35 mm profile rail

35 mm profile rail

i PRODUCT INFORMATION

- The switch actuators KNX SA-8C-230V and KNX SA-16C-230 V receive KNX telegrams and switch up to 8 or 16 consumers independently of one another.
- Each outlet is controlled by way of a monostable relay.
- Each outlet can be individually programmed through the ETS3/4. A choice can be made between logical links, status reports, block functions, central switch functions and comprehensive time functions, such as activation/deactivation of delays and staircase lighting timer functions. Scenario functions are also available.
- In the case of the series installation devices, four L-connections each are internally bridged.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

■ TECHNICAL DATA


- Supply voltage**
230 VAC / 50 Hz
- Output voltage**
230 VAC / 50 Hz
- IP** **Class II**
- 0 °C to +45 °C**
- Plastic LEXAN UL-94-V0**
- Red LED: programming LED, Green LED: Channel status**
- Manual operation of the shutter channels directly on the device**
- 10 A cos φ = 1**
- Resistive loads**
1900 W
- HV halogen lamps**
1400 W
- LV halogen lamps**
500 W
- Fluorescent lamps uncompensated**
500 W
- Fluorescent lamps parallel compensated**
120 W
- Capacitive loads**
max 21 μF

| Description | Colour | Part number |
|------------------|--------|-------------|
| KNX SA-16C-230 V | white | 90201 |
| KNX SA-8C-230 V | white | 90200 |

KNX KNX SA-8C-230 V-CL



8 C



i PRODUCT INFORMATION

- The switch actuator KNX SA-8C-230V-CL receives KNX telegrams and switches consumers independently of one another.
- Suitable for loads with up to 100µF at 16A
- Each outlet is controlled by way of a bistable relay and can also be manually activated with the buttons at the actuator.
- Each outlet can be individually programmed through the ETS3/4. A choice can be made between logical links, status reports, block functions, central switch functions and comprehensive time functions, such as activation/deactivation of delays and staircase lighting timer functions. Scenario functions are also available.
- In the event of a mains failure, all relays maintain their current switch position. In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

■ TECHNICAL DATA

Supply voltage
230 VAC / 50 Hz

Output voltage
230 VAC / 50 Hz

IP IP20 / Class II

0 °C to +45 °C

Plastic LEXAN UL-94-V0

LED Red LED: programming LED, Green LED: Channel status

Manual operation of the shutter channels directly on the device

16 A cos φ = 1

Resistive loads
2700 W

HV halogen lamps
2500 W

LV halogen lamps
1000 W

Fluorescent lamps uncompensated
1800 W

Fluorescent lamps parallel compensated
1000 W


Capacitive loads
max 100 µF

| Description | Colour | Part number |
|--------------------|--------|-------------|
| KNX SA-8C-230 V-CL | white | 90209 |

KNX KNX SA-8C-EM



8 C









8TE

PRODUCT INFORMATION

- The switch actuator KNX SA-8C-230V-EM receives KNX telegrams and switches consumers independently of one another.
- Measures the current consumption of the connected consumers as of a current of 20mA
- The following values can be determined: mA, A, kW
- Determination of the consumption per channel and sum of all channels
- Surveillance of service intervals
- Suitable for loads with up to 200 μ F at 16A
- Resettable operating hour counter
- Each outlet is controlled by way of a bistable relay and can also be manually activated with the buttons at the actuator.
- Each outlet can be individually programmed through the ETS3/4. A choice can be made between logical links, status reports, block functions, central switch functions and comprehensive time functions, such as activation/deactivation of delays and staircase lighting timer functions. Scenario functions are also available.
- In the event of a mains failure, all relays maintain their current switch position. In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

■ TECHNICAL DATA

| | |
|---|--|
|  | Supply voltage 230 VAC / 50 Hz |
| | Output voltage 230 VAC / 50 Hz |
|  | IP20 / Class II |
|  | 0 °C to +45 °C |
|  | Plastic LEXAN UL-94-V0 |
|  | Red LED: programming LED, Green LED: Channel status |
|  | Manual operation of the shutter channels directly on the device |
| | 16 A cos ϕ = 1 |
| | Resistive loads 3680 W |
| | HV halogen lamps 3680 W |
| | LV halogen lamps 2000 W |
| | Fluorescent lamps uncompensated 3680 W |
| | Fluorescent lamps parallel compensated 2500 W |
| | Capacitive loads max 200 μ F |

Description

Colour


Part number

KNX SA-8C-EM

white

90210

KNX KNX SBA-4C / 8C-230 V

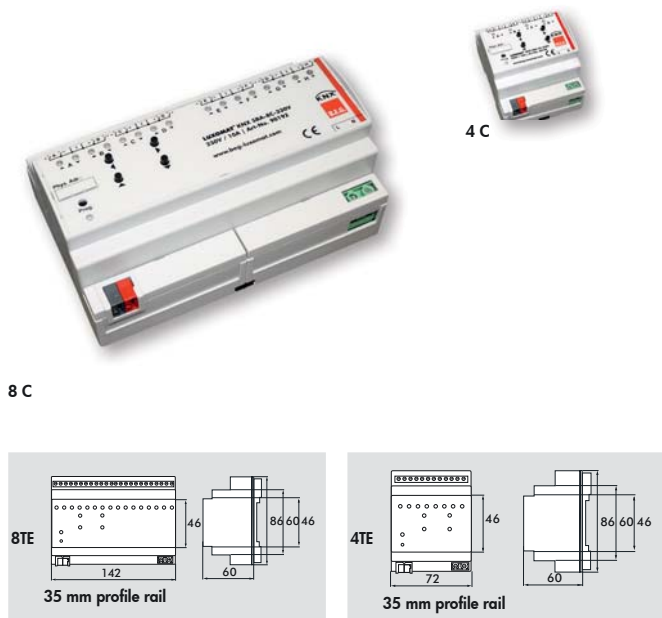

■ TECHNICAL DATA

Supply voltage
230 VAC / 50 Hz

Output voltage
230 VAC / 50 Hz

IP IP20 / Class II

Temperature
0 °C to +45 °C

Material
Plastic LEXAN UL-94-V0

LED Red LED: programming LED, Green LED: Channel status

Operation
Manual operation of the channels directly on the device

Roller blind motors
600 W

i PRODUCT INFORMATION


- The blind actuators KNX SBA-4C-230V and KNX SBA-8C-230 V receive KNX telegrams and control several blind motors with limit switches independently of one another.
- Each channel is controlled with two monostable relays and can also be manually activated with the buttons at the actuator.
- Each channel can be individually programmed through the ETS3/4. Status reports, blocking functions, central switch functions and extensive calibration and positioning functions are available for selection.
- In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

| Description | Colour | Part number |
|-----------------|--------|-------------|
| KNX SBA-8C-230V | white | 90192 |
| KNX SBA-4C-230V | white | 90190 |

KNX KNX SBA-4C-24 V



4 C



■ TECHNICAL DATA

Supply voltage

230 VAC / 50 Hz

Output voltage

24 VDC



IP20 / Class II



0 °C to +45 °C



Plastic LEXAN UL-94-V0



Red LED: programming LED, Green LED: Channel status



Manual operation of the channels directly on the device



24 V DC Roller blind motors


200 W

i PRODUCT INFORMATION

- The blind actuator KNX SBA-4C-24V receives KNX telegrams and controls several blind motors with limit switches independently of one another.
- Each channel is controlled with two monostable relays and can also be manually activated with the buttons at the actuator.
- Each channel can be individually programmed through the ETS3/4. Status reports, blocking functions, central switch functions and extensive calibration and positioning functions are available for selection.
- In the event of bus voltage failure or resumption, the switch positions of the relay can be individually programmed for each channel.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

| Description | Colour | Part number |
|----------------|--------|-------------|
| KNX SBA-4C-24V | white | 90191 |

KNX KNX CD-4C



i PRODUCT INFORMATION

- The dimmer actuator KNX CD-4C serves the purpose of switching and dimming fluorescent lamps with 1-10V EB. The voltage is directed to the EB through the relay of the device.
- The lights are regulated by way of 1-10V voltage. **The voltage 1-10V is provided by the EBs.**
- The device is equipped with short circuit and temperature protection, as well as a lamp-preserving soft start.
- The device is planned for permanent installation on a DIN-rail (top hat) in high voltage current distributors.
- Installation must take place in dry interiors.

■ TECHNICAL DATA

Supply voltage
230 VAC / 50 Hz

Output voltage
230 VAC

analogue control outputs
1 - 10 V

IP IP20 / Class II

Temperature
0 °C to +45 °C

Material
Plastic LEXAN UL-94-V0

LED
Red LED: programming LED, Green LED: Channel status

Operation
Manual operation of the channels directly on the device

Current
16 A $\cos \varphi = 1$

Resistive loads
2700 W

HV halogen lamps
2500 W

LV halogen lamps
1000 W


Fluorescent lamps uncompensated
1800 W

Fluorescent lamps parallel compensated
1000 W








Capacitive loads
max 100 μ F

| Description | Colour | Part number |
|-------------|--------|-------------|
| KNX CD-4C | white | 90180 |

KNX KNX Room Controller



■ TECHNICAL DATA

-  230 V AC
-   IP20 / Class I
-  -5 °C to +45 °C
-  Polycarbonate, UV- and shock resistant
- Pollution degree 2
-  Illumination: μ 16 A
-  Blind/roller shutter: μ 16 A



Please note: The following connectors are required:


- Feeder: Wieland No. 92.931.3053.1 black
- Blinds / Roller shutters: Wieland No. 92.954.4053.1 black
- DALI: Wieland No. 92.954.4453.0 blue
- KNX: Wieland No. 93.421.0553.1 green
Wieland No. 93.422.0553.1 green
- Push button terminal: (2x) Adels No. 162 463 P blue

PRODUCT INFORMATION


- Pre-wired control unit for KNX occupancy detectors and other loads for being mounted in a false ceiling
- Gateway DALI/KNX for connecting up to 45 DALI lights
- GST18 plugs and sockets
- Pre-wiring allows for cost savings and prevents installations
- The integrated service switch allows for using (basic functions) the connected loads even without ETS
- All B.E.G. KNX motion and occupancy detectors can be combined with the KNX-RCT
- Already integrated are a DALI gateway, a roller shutter actuator and two push button interfaces

| Description | Colour | Part number |
|-------------------------|--------|-------------|
| KNX-RCT Room Controller | white | 92979 |
| Plug set KNX-RCT | — | 92983 |


KNX DALI/KNX-Gateway IP-N



■ TECHNICAL DATA

 110 - 240 V 50 / 60 Hz
max. 0,1 A, additionally via KNX BUS

 7W

 IP20 / Class I

 0 °C to +45 °C


 Plastic LEXAN UL-94-V0

LNK-LED yellow for indicating Ethernet connection

ERR-LED red for displaying error conditions,

LED red for displaying normal/addressing mode

LC-Display, 2 lines with 12 characters each with menu for commissioning and setting of parameters


 3 keys for device control and parameterisation, learn keys for switching normal/addressing mode

PRODUCT INFORMATION

- The gateway connects the KNX BUS with the DALI BUS (DALI BUS for controlling the illumination)
- Each gateway is for controlling and dimming up to 64 electronic ballasts in 16 groups
- RJ45 interface for integration into the IP network
- Commissioning and assignment of the electronic ballasts (DALI) via operating keys, ETS or integrated web server
- Various operating modes
- Burn-in function for optimising the lifetime of the lamps
- Scenes module for controlling individual electronic ballasts
- Individual error detection (transmission to KNX or Ethernet)
- Function for quick and easy replacement of one electronic ballast without ETS or system integrator
- Test function and evaluation for DALI emergency lights

| Description | Colour | Part number |
|-----------------------|--------|-------------|
| DALI/KNX-Gateway IP-N | white | 90134 |

KNX KNXnet/IP Interface



■ TECHNICAL DATA

12 - 30 V AC / DC

IP20 / Class I

0 °C to +45 °C

Plastic LEXAN UL-94-V0

LA-LED for indicating communication on the Ethernet connection, **LK-LED** for indicating Ethernet connection


LED red when displaying normal/addressing mode
 Learn keys for switching normal/addressing mode

PRODUCT INFORMATION

- Cost-efficient programming of a KNX system via LAN.
- Programming interfaces from the ETS to the KNX BUS
- Scan function (ETS3 and 4)
- KNXnet/IP-secured tunnel connection
- Plastic housing, 4 widths units (DIN-rail, top hat)
- Programmable via ETS3 and 4
- Connection: 12-30V AC/DC, network and KNX

| Description | Colour | Part number |
|---------------------|--------|-------------|
| KNXnet/IP Interface | white | 90125 |

KNX KNXnet/IP Interface Web



i PRODUCT INFORMATION

- Websites can be called up from the integrated web server via the TCP/IP network in order to display KNX statuses or to switch events
- Controllable via Smartphone or tablet PC
- Programming interfaces from the ETS to the KNX BUS
- Programmable via ETS3 and 4
- KNXnet/IP-secured tunnel connection
- Plastic housing, 4 widths units (DIN-rail, top hat)
- Connection: 12-30V AC/DC, network and KNX
- Pre-installed visualisation software
- Integrated web server

■ TECHNICAL DATA

- 12 - 30 V AC / DC
- IP20 / Class I
- 0°C to +45
- Plastic LEXAN UL-94-V0
- LA-LED** for indicating communication on the Ethernet connection, **LK-LED** for indicating Ethernet connection
- LED red** for displaying normal/addressing mode
- Learn keys for switching normal/addressing mode



| Description | Colour | Part number |
|-------------------------|--------|-------------|
| KNXnet/IP Interface Web | white | 90126 |

KNX KNX PS 160 mA / 640 mA



160 mA

640 mA



■ **TECHNICAL DATA**

Supply voltage

230 VAC / 50 Hz

Output voltage

24 VDC / 50 Hz



160 mA / 640 mA



IP20 / Class II



0°C to +45°C



Plastic LEXAN UL-94-V0

i **PRODUCT INFORMATION**

- The power supply KNX PS has an integrated inductor for supplying the BUS with a constant, stabilised voltage
- The device is designed for DIN-rail (top hat) assembly in high voltage current distributors
- The KNX PS 640mA also possesses a non-detuned, separate 30 VDC voltage outlet for supplying other devices.

| Description | Colour | Part number |
|---------------|--------|-------------|
| KNX PS 160 mA | white | 90211 |
| KNX PS 640 mA | white | 90212 |

KNX Control Touch-Panel – The multi-functional display and control device



KNX system control – flexibility and clarity

With **B.E.G.** KNX products, individual and flexible solutions for building automation can be implemented. Values and scenes are programmed via the KNX ETS software, so that the system switches on or off at predetermined times or reacts to information from KNX sensors.

For the convenience of users in private houses, it is important to be able to override the settings if needed.

For this purpose, **B.E.G.** offers the KNX Control Touch-Panel as part of its comprehensive product range. All important standard functions and also the KNX system status display can be easily adjusted via the graphical 5.7-inch colour TFT display with LED backlighting.

The password-protected touchscreen display allows 110 KNX functions to be used, storing up to 64 scenes which the user can easily configure.

KNX CONTROL TOUCH-PANEL (90120)



WITH FOR DIFFERENT BACKGROUND DESIGNS




Blue Design



Grey Design



Black Design



White Design

FOUR DIFFERENT FRAMES CAN BE ORDERED AS OPTIONS



Glass frame black (90127)



Glass frame white (90142)



Metal frame Stainless steel (90138)




Metal frame Aluminium (90137)



PATRESS BOX (90128)

KNX KNX Control Touch-Panel



■ TECHNICAL DATA

-  230 V AC 50 / 60 Hz KNX BUS
-  11W
-  IP20 / Class I
-  0 °C to +45 °C
-  Plastic ABS Terez 32/19V0
-  **LED red** for displaying normal/addressing mode, Graphic-compatible 5.7" TFT colour display 320 x 240 pixels with LED background illumination
-  Learn key for switching normal/addressing mode; resistive analogue touch with touch-sensitive surface on the display

PRODUCT INFORMATION

- Graphic-compatible TFT colour display with LED background lighting
- All important standard functions and status displays of the KNX system
- Password protection, logic module, alarm module, etc.
- Password assignment for 10 main operator pages and all configuration pages possible
- Individual symbol assignment
- 110 KNX functions in the form of operator pages
- Programmable via ETS3 and 4
- Up to 64 easy to configure scenarios
- Easy operation
- Integrated weekly switching schedule
- Occupancy simulation for holiday periods
- Logical linking of up to 60 objects

| Description | Colour | Part number |
|-----------------------------|-----------|-------------|
| KNX Control Touch-Panel | – | 90120 |
| Accessory (optional) | | |
| Glass frame | white | 90142 |
| Glass frame | black | 90127 |
| Metal frame Aluminium | aluminium | 90137 |
| Metal frame Stainless steel | silver | 90138 |
| FM-box (pattress box) | grey | 90128 |

| Part no. | Description | Prod./Gr. | Page |
|----------|--|-----------|------|
| 32697 | Blinds for RC-plus next | 06 | 19 |
| 32702 | Blinds for PD9 | 06 | 19 |
| 33207 | Blinds for PD9-GH | 06 | 19 |
| 33233 | Blinds for 180 | 06 | 19 |
| 35126 | Centre plate for modular push button (angled corners) | 06 | 19 |
| 35127 | Centre plate for modular push button (rounded corners) | 06 | 19 |
| 90120 | KNX Control Touch-Panel | 20 | 35 |
| 90125 | KNXnet/IP Interface white | 20 | 30 |
| 90126 | KNXnet/IP Interface Web white | 20 | 31 |
| 90127 | Glass frame Control Touch-Panel black | 06 | 34 |
| 90128 | Patress box for Control Touch-Panel | 06 | 34 |
| 90130 | KNX sensor interface, 2x white | 20 | 16 |
| 90131 | KNX sensor interface, 4x white | 20 | 16 |
| 90134 | DALI/KNX-Gateway IP-N white | 20 | 29 |
| 90137 | Metal frame Control Touch-Panel aluminium | 06 | 34 |
| 90138 | Metal frame Control Touch-Panel silver | 06 | 34 |
| 90142 | Glass frame Control Touch-Panel white | 06 | 34 |
| 90180 | KNX CD-4C white | 20 | 27 |
| 90190 | KNX SBA-4C-230V white | 20 | 25 |
| 90191 | KNX SBA-4C-24V white | 20 | 26 |
| 90192 | KNX SBA-8C-230V white | 20 | 25 |
| 90200 | KNX SA-8C-230 V white | 20 | 22 |
| 90201 | KNX SA-16C-230 V white | 20 | 22 |
| 90209 | KNX SA-8C-230 V-CL white | 20 | 23 |
| 90210 | KNX SA-8C-EM white | 20 | 24 |
| 90211 | KNX PS 160 mA white | 20 | 32 |
| 90212 | KNX PS 640 mA white | 20 | 32 |
| 90221 | KNX-WTS-GPS weiß | 18 | 17 |
| 92018 | Lock for cover cap of Indoor 180 | 06 | 15 |
| 92123 | IR-PD-KNX | 09 | 18 |
| 92139 | Frame IP54 for Indoor 180, white | 06 | 15 |
| 92141 | Indoor 180 socket for wall mounting, IP54 | 06 | 15 |
| 92161 | Socket IP54 for PD2- and PD4-SM | 06 | 8 |
| 92199 | Wire basket BSK (Ø 200 x 90 mm) | 06 | 8 |
| 92235 | Cover ring for PD9, (Ø 36 mm), RAL 7021, anthrazite | 06 | 12 |
| 92237 | Cover ring for PD9, (Ø 36 mm), RAL 9006, silver | 06 | 12 |

| Part no. | Description | Prod./Gr. | Page |
|----------|--|-----------|------|
| 92238 | Cover ring for PD9, (Ø 36 mm), RAL 9010, white | 06 | 13 |
| 92260 | Blinds for PD2- and PD4 SM | 06 | 19 |
| 92294 | Blinds for Indoor 180 | 06 | 19 |
| 92313 | Blinds for PD4 SM/FC/FM SET | 06 | 19 |
| 92327 | Cover ring for PD9 (Ø 45 mm) | 06 | 12 |
| 92346 | Cover ring for PD9 (Ø 45 mm) | 06 | 12 |
| 92375 | Socket IP65 for PD4-SM (IP20) | 06 | 9 |
| 92441 | Wallbracket for PD4-SM | 06 | 11 |
| 92467 | Wire basket BSK (Ø 164 x 143 mm) | 06 | 7 |
| 92537 | Cover ring for PD11 black | 06 | 14 |
| 92630 | Covering IP20 pure white, RAL 9010 | 06 | 19 |
| 92631 | Cover ring for Indoor 180 (IP20) traffic white, RAL 9016 | 06 | 19 |
| 92632 | Covering IP20 oyster white, RAL 1013 | 06 | 19 |
| 92633 | Covering IP20 silver, RAL 9006 | 06 | 19 |
| 92634 | Covering IP20 anthracitet, RAL 7021 | 06 | 19 |
| 92726 | IR-Adapter for Smartphones | 09 | 7 |
| 92880 | PD2-KNX-SM | 18 | 8 |
| 92881 | PD2-KNX-FC | 18 | 8 |
| 92882 | PD2-KNX-FM | 18 | 8 |
| 92883 | PD4-KNX-SM | 18 | 9 |
| 92884 | PD4-KNX-FC | 18 | 9 |
| 92885 | PD4-KNX-FM | 18 | 9 |
| 92886 | PD4-KNX-C-SM | 18 | 11 |
| 92887 | PD4-KNX-C-FC | 18 | 11 |
| 92888 | PD4-KNX-C-FM | 18 | 11 |
| 92889 | PD4-KNX-GH-SM | 18 | 10 |
| 92890 | PD9-KNX-FC | 18 | 12 |
| 92891 | PD9-KNX-GH-FC | 18 | 13 |
| 92892 | Indoor 180-KNX | 18 | 15 |
| 92893 | PD11-KNX-FLAT-FC | 18 | 14 |
| 92894 | RC-plus next 230 KNX white | 18 | 7 |
| 92895 | RC-plus next 230 KNX black | 18 | 7 |
| 92979 | KNX Room Controller white | 18 | 28 |
| 92983 | Plug set KNX RCT | 18 | 28 |
| 97004 | Outside corner socket for RC-plus next white | 06 | 7 |
| 97005 | Inside corner socket for RC-plus next white | 06 | 7 |
| 97024 | Outside corner socket for RC-plus next black | 06 | 7 |



YOUR PARTNER IN QUALITY AND SERVICE

We want you to be happy

When developing a product, our main issue is quality. It is our utmost concern to offer products which do not only meet the demands of our customers but exceed them.

Pre-sales service – tailor-made to suit you

Our field staff are at your disposal. They will assist you in planning your project and finding the right detector for the special application and local demands. They keep you informed about new **B.E.G.** products. Our team of field and indoor service staff will answer your questions, also technical questions, and help you in finding the right solution.

After-sales service – we do not leave you in the lurch

We care for our customers. Therefore, we offer an after-sales service. Our well-trained indoor service team will answer your questions concerning application, re-orders and guarantee matters. If there should be a problem concerning our products, our competent technical support will help you on the telephone or – if necessary – on site. **+44 (0) 870 850 5412**

Distribution and logistics centre – delivery of the products within short time and in perfect condition

Thanks to an extensive stock and reliable logistics partners we are able to deliver our products in perfect condition to your schedule.

Guarantee

If there should be a guarantee matter we are at your disposal.

B.E.G.

ISO 14001

ISO 9001



Environmental
Management

Quality
Management

B.E.G. (UK) Ltd.

Q West, Great West Road
Brentford, Middlesex, TW8 0GP
Tel: +44 (0) 870 850 5412
Fax: +44 (0) 870 850 5413
E-Mail: info@beguk.co.uk
Internet: www.beg-luxomat.com

B.E.G. Ireland

Marlin Electrical
10 Vesey Place ■ Glenageary
Dun Laoghaire, Dublin
Tel: +353(0)12807205
Fax: +353(0)12807776
Internet: www.beg-luxomat.com

B.E.G. Brück Electronic GmbH

Gerberstr. 33
D-51789 Lindlar
Telefon: +49 (0) 2266.90 121-0
Fax: +49 (0) 2266.90 121-50
E-Mail: info@beg.de
Internet: www.beg-luxomat.com



Lights/Floodlights/Photo electric switches

KNX/DALI

SMARTHOME