


RCBO residual current devices 6 kA

Certified compliant BS EN 61009-1

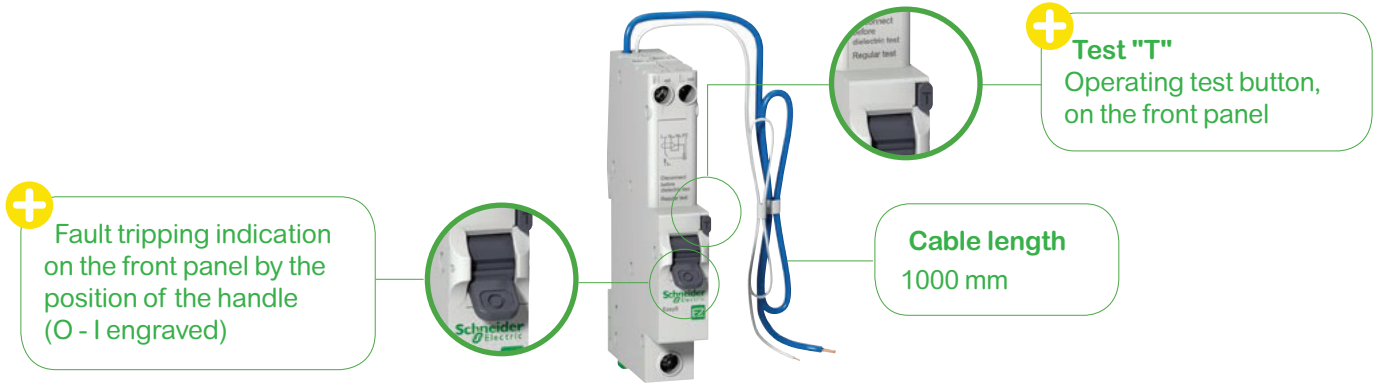

Characteristics

Main characteristics		
Endurance (O-C)	Electrical	4000 cycles
	Mechanical	10000 cycles
Passive, will not trip in the event of a voltage loss		
Additional characteristics		
Degree of protection	Device only	IP20
Overvoltage category (IEC 60364)	IV	
Operating temperature	-15°C to +60°C	
Storage temperature	-40°C to +85°C	
Hazardous substances	RoHS 2003 compliant	
Tropicalisation (IEC 60068-1)	Treatment 2 (relative humidity 95 % to 55°C)	

Weight (g) and Dimensions (mm)

Weight (g)	
Type	Easy9 RCBO
1P+N	180

