

Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.


> Before installing an LED High Bay or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

PRODUCT DIMENSIONS

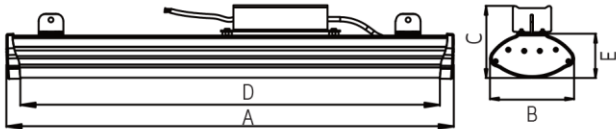

	A	B	C	D	E
150W	905	135	115	865	72

All units are in mm

Important Warranty Information

The Tri-colour Downlight has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 571788



Certificate No. EMS 571787

NET LED Ltd.
Buckingway Business Park
300 Anderson Road
Cambridge
CB24 4UQ
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk

www.netled.co.uk/downloads

Distributed by

NET LED
LIGHTING

LED LINEAR HIGH BAY INSTALLATION GUIDE

LED LINEAR HIGH BAY NET-23-12-18

KEY DATA

Light Source	LED
Power	150W
Luminous Flux	2000lm
Luminous Efficacy	113lm/W
IP Rating	IP65
IK Rating	IK10
Colour Temperature	5000K
Colour Rendering	>80 CRI
Housing Material	Aluminium
Diffuser Material	Polycarbonate
Manufacturer	FYTLED


SUPPLY/EARTH CLASS

100-270V AC 50/60 Hz
Mains Input Termination



Class I

Mains Input Termination

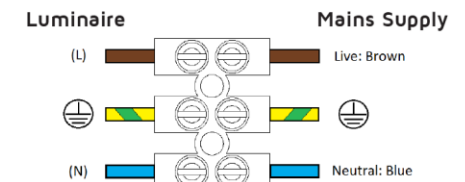

1-10V Dimming Terminal



UK CA

CE



Installation procedure: Carefully read the instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

Installation instructions for suspended use:



Non-replaceable light source




Replaceable control gear by professional


Step 1: Drill two 100mm holes where Linear High Bay is going to be installed.




Step 2: Fix the expansions screws in the holes.




Step 3: Connect the Linear High Bay to the suspension kit; make sure the safety clip is closed.

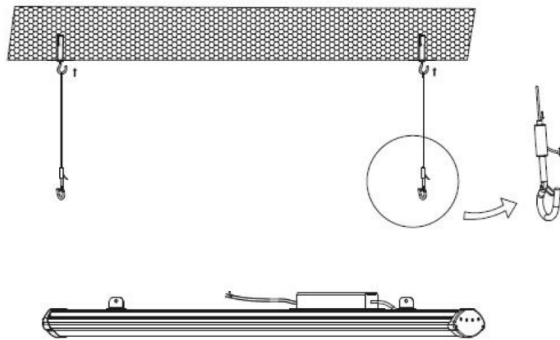

Step 4: Connect the driver to the power line according to the wiring diagram below.

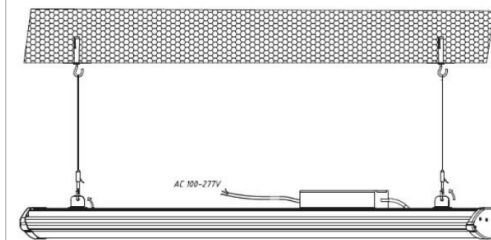

Mains Input Termination

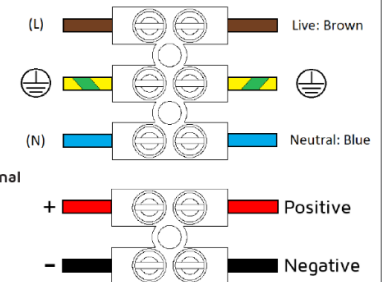

LED High Bays

Available in 100W, 150W & 200W, the Orwell Range of LED High Bays are dimmable (1-10V) as standard.



LED High Power Flood Lights

Available in 150W, 200W & 240W.



Full product range available

Visit www.netled.co.uk for more commercial LED lighting products, including:

Panel Lights, Downlights, T5 and T8 Tubes, Batten and Linear Luminaires, 2D Bulkheads and retrofit Gear Trays, Non-Corrosive Luminaires and much more.