

Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.

> Before installing an LED High Bay or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.



Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

Non-replaceable light source

>The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.

PRODUCT DIMENSIONS



	Height	Diameter
100W	225	Ø250
150W	246	Ø280
200W	247	Ø320

All units are in mm

Important Warranty Information

The LED High Bay has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 571788



Certificate No. EMS 571787

NET LED Ltd.
Buckway Business Park
300 Anderson Road
Cambridge
CB24 4UQ
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk

www.netled.co.uk/downloads

Distributed by



LED HIGH BAY INSTALLATION GUIDE

LED HIGH BAY NET-23-12-XX

KEY DATA


Light Source	LED		
Power	100W	150W	200W
Luminous Flux	14900lm	21500lm	29500lm
Luminous Efficacy	142lm/W	141lm/W	141lm/W
Colour Temperature	5000K		
Colour Rendering	>70 CRI		
Housing Material	Aluminium		
Diffuser Material	Polycarbonate		
IP Rating	IP65		
IK Rating	IK10		
Manufacturer	FYTLED		

SUPPLY/EARTH CLASS

100-270V AC 50/60 Hz




Class I

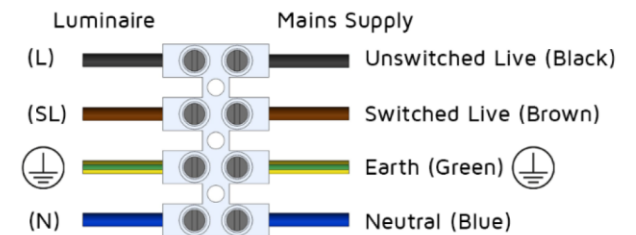


Installation procedure: Carefully read the instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.


High Bay Installation:




Step 1: Carefully remove the High Bay light from the packaging.

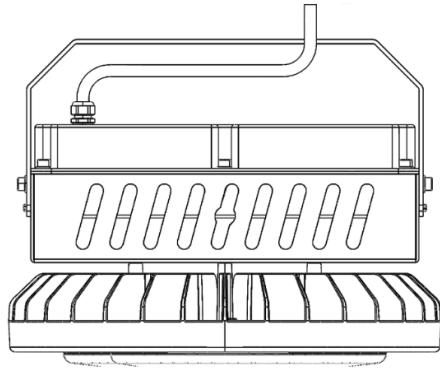


Step 2: Mount the High Bay light to the ceiling using a bracket or a suitable suspension kit.

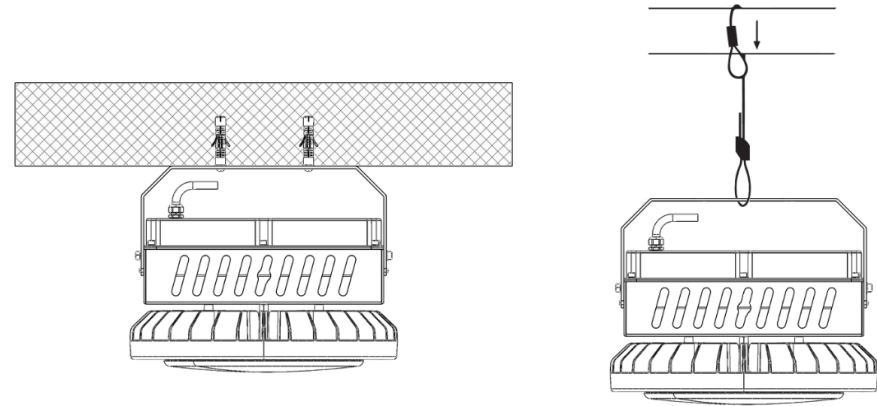

Step 3: Secure the supply cable using suitable clips. Ensure that the cable is not touching the body of the High Bay.

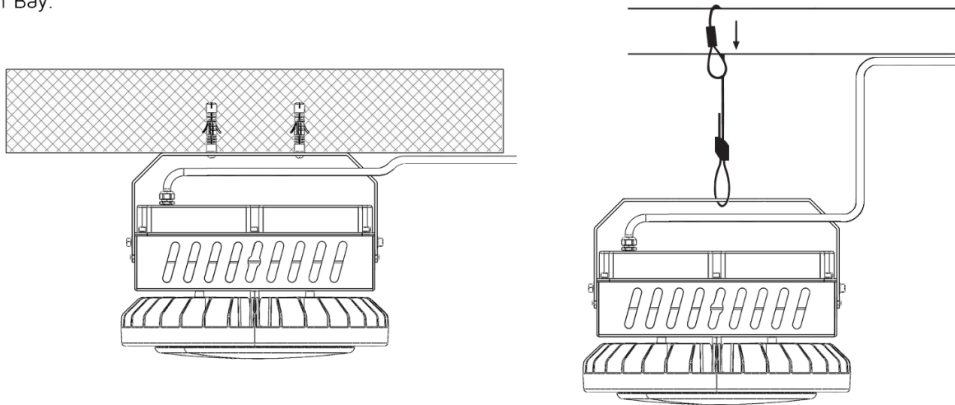

Step 4: Connect the cable to the mains as per the illustration below.

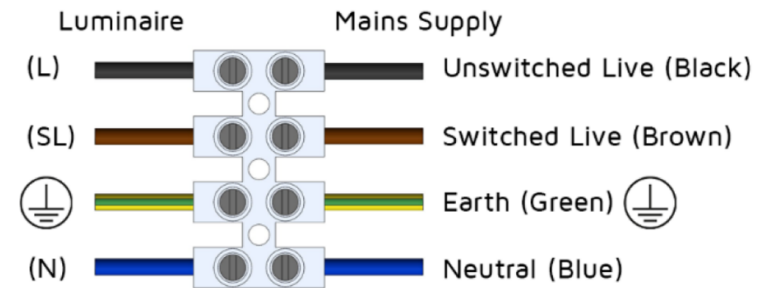

Accessories

Microwave Sensor

The light output can be automatically regulated according to motion and ambient light levels.



Ensure that the Emergency Test Record is completed.

NET LED LIGHTING

Part Number:	Installation Date:									
Luminaire Ref/Location	In case of difficulty, contact the Installation Engineers:									
Full Recharge Time 24 Hours	Duration 3 Hours									
Lamp Type - LED										
ROUTINE TEST RECORD										
Monthly Test	Year 1		Year 2		Year 3		Year 4		Year 5	
	Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
Functional										
Functional										
Functional										
Functional										
One Hour										
Functional										
Functional										
Functional										
Three Hour										

Example of Emergency Test Record.

Full product range available

Visit www.netled.co.uk for more commercial LED lighting products, including:

Panel Lights, Downlights, T5 and T8 Tubes, Linear Luminaires and much more.