

Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.

> Before installing an LED T8 Tube or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.


> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

Non-replaceable light source

>The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.

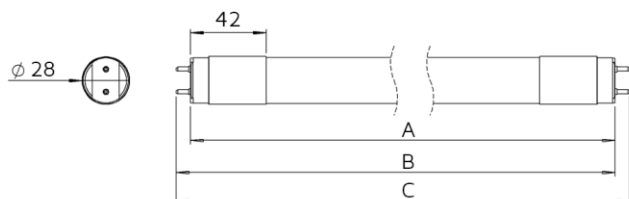

All dimensions are in mm	A	B	C
2ft / 600mm	588	596	603
3ft / 890mm	894	901	908
4ft / 1200mm	1198	1206	1213
5ft / 1500mm	1498	1506	1513
6ft / 1800mm	1764	1771	1778

Important Warranty Information

The LED T8 Tube has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 571788



Certificate No. EMS 571787

NET LED Limited
Buckingway Business Park
300 Anderson Road
Cambridge
CB24 4UQ UK
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk

www.netled.co.uk/downloads

NET-55-02-XX

KEY DATA

Light Source:	LED				
Length (ft):	2ft	3ft	4ft	5ft	6ft
Length (mm):	600	890	1200	1500	1800
Power (W):	8W	9W	15W	16W	22W
Luminous Flux (lm):	1080	1220	1200	2200	3000
Luminous Efficacy:	130lm/W				
Colour Temperature:	5500K	5500K	3000K 5500K	3000K 5500K	3000K 5500K
Colour Rendering (Ra):	>80				
Housing Material:	Aluminium				
IP Rating:	IP20				
Manufacturer:	Wiscon				


SUPPLY/EARTH CLASS

100-240V AC 50/60 Hz

Fig.1 Mains Input Termination



Class II

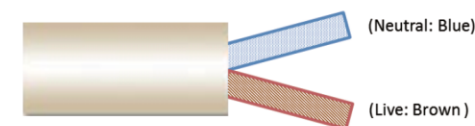

Installation procedure: Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

For a light fitting with an electronic ballast:




Non-replaceable light source




Non replaceable control gear

Step 1: Turn off the power supply and locate the electronic ballast in the fitting.

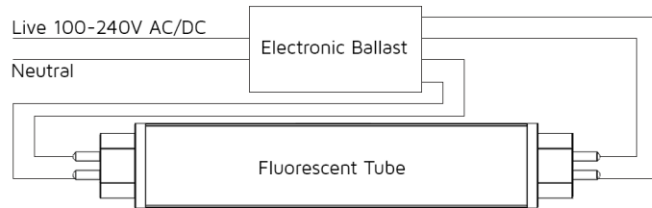


Step 2: Bypass/remove the electronic ballast along with any additional control gear or power factor correction capacitors as shown in the illustration below.

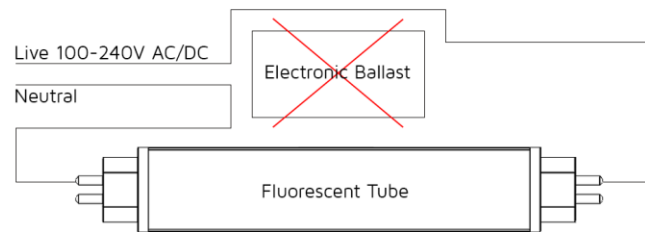

Note: A qualified electrician is required to remove/bypass the ballast from the fitting.

Step 3: Finally, to complete the circuit, add a link wire as shown in the illustration below. Install the LED tube and switch on the power supply. Our LED tubes can be installed in any orientation.

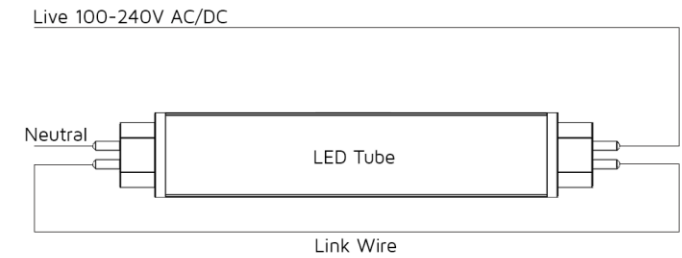

Note: All our tubes incorporate an internal fuse which provides an added layer of protection for the LED tube and the driver.

Optional additional products: A number of additional compatible products are available. To view our full range, please visit www.netled.co.uk

Have you considered a complete luminaire?

Foxton Battens

We supply LED battens which are well-suited for use in offices, corridors, receptions, schools and hospitals.



Hilton Non-Corrosive Luminaire

We supply IP65-rated (weather and dustproof) luminaires. These can be supplied with stainless steel retaining clips (sold separately). Designed for use in industrial, storage and outdoor environments.



3 Hour Emergency Kits

We supply 3 Hour Emergency Kits for our T8 LED Tubes. Available in Standard and DALI versions.

