



Protection, Monitoring and Control Components for Low Voltage Equipment

SELECTION GUIDE: **UK EDITION**



[Telehouse Data Centre, London. 199 TemPower 2 ACBs, 423 TemBreak 2 MCCBs.]

Terasaki supply circuit breakers which protect people and equipment from electrical faults. Safety and protection are the prime purposes of our products.

We supply products to switchboard builders, shipbuilders and equipment manufacturers. We are global market leaders for switchgear in the marine market. Terasaki have worldwide export experience and the necessary professional skills to support your business.



[Terasaki is the world leader for circuit breakers and switchgear in the marine market.]



Terasaki Profile	4
Overheating Protection and Selectivity Analysis Software	7
Air Circuit Breakers	8
ACB Selection Guide	9
Protection Relay Guide	10
ACB Accessories	11
Advanced External Display and Protection Products	12
Monitoring and Communication: T2ED	12
Earth Leakage Protection Relays	12
Moulded Case Circuit Breakers	13
Electronic Protection Including Types with Monitoring and Communication	14
Adjustable Thermal and Adjustable Magnetic Protection	16
TemBreak 2 Lite	18
Circuit Breakers with Integral Residual Current Protection (CBR)	19
Moulded Case Circuit Breakers for Special Applications	20
MCCB Accessories	21
Retrofit	22
Retrofit Concept	22
Retrofit Services	23
Power Factor Correction	24
Contactors	25
Contactor Selection Guide 3P	26
Contactor Selection Guide 4P	28
Pro-DB Distribution Boards	30
Pro-Panel Panelboards	31
DIN Modular Protection	32
Accessories	32
DIN Modular Protection Selection Guide	33
Automatic Transfer Controller	34
Discrimination and Cascade	35



TERASAKI PROFILE



Mr. Taizo Terasaki
President



Mr. Masakazu Fujita
Chairman

“We want to meet the needs of more customers around the world in our circuit breaker and lifecycle service businesses.”

Mr. Taizo Terasaki, President

Foundation:

October 1, 1923

Established:

April 1, 1980

Capital:

1236640 thousands of yen

Chairman:

Masakazu Fujita

President:

Taizo Terasaki

Number of Employees:

1776

Net Sales:

36880 million yen

Subsidiaries:

5 domestic (Japan) and 8 overseas

Affiliated companies:

2 domestic

Listings:


Tokyo Stock Exchange (Jasdaq)
[Security Code 6637]



Mr. Yasuhiko Terasaki
Late chairman of the company



Mr. Yasutaro Terasaki
Founder of the company

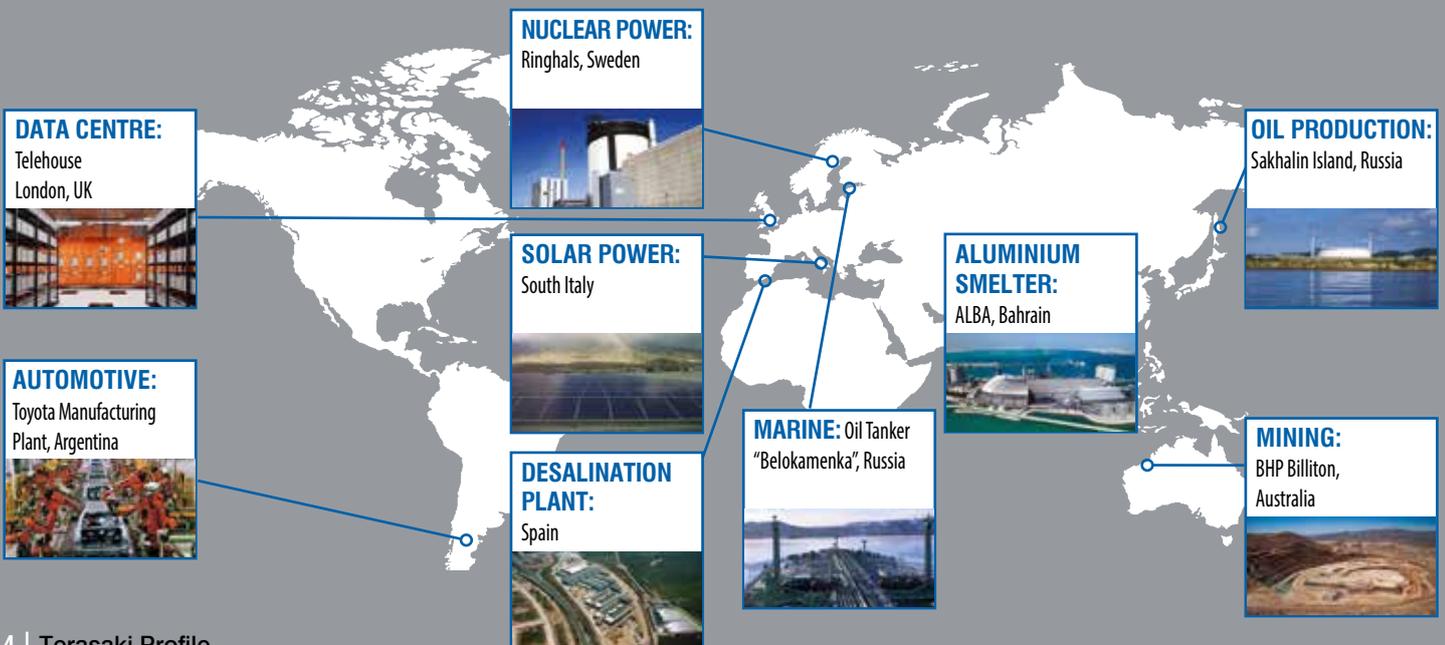



TERASAKI PROFILE - UK



Terasaki Electric (Europe) Ltd. was established in the UK in 1941: It was the first Terasaki overseas subsidiary. From our base we now operate in 61 countries throughout the world, supplying electrical distribution products and providing safety and protection for people and equipment.

Having our main logistics base in the UK means we can reduce delivery times and supply the products as fast as the customer needs it.

Available Stock (monthly):

Terasaki stock equates to approx 800 ACBs; 2500 MCCBs

Size of Warehouse:

1800 square meters of storage

Delivery Performance:

On average we deliver 95.77% of the items on the day we promised we would.

Operations:

We assemble, modify and test circuit breakers and accessories.

Turnover:

£28.2 million

Number of Employees:

143



DIRECT RESPONSE SERVICE DIVISION

Terasaki's preventative maintenance service is designed to ensure integrity of electrical supplies. We will tailor a program based on the structure of YOUR electrical system. We can provide the following services for switchgear on industrial and commercial sites:

- RETROFIT & LIFE CYCLE
- DISCRIMINATION ANALYSIS
- FAULT DIAGNOSIS
- DUCTOR TESTING
- SWITCHBOARD SERVICE AND MAINTENANCE
- PREVENTATIVE MAINTENANCE
- LV ARC HAZARD REDUCTION SOLUTIONS
- SPARES MANAGEMENT AND SUPPLY
- CIRCUIT BREAKER MAINTENANCE AND REPAIR





Air Circuit Breakers



Moulded Case Circuit Breakers



Din Modular Protection



Automatic Transfer Controller



Contactors



External Display



Asset Management



Retrofit

R&D

We are meeting the needs of customers with a complete system of development, design and manufacture based on the know-how we have accumulated with electrics, electronics and control over the decades since our founding.

We have DEKRA (formerly KEMA) - approved test systems and two generators in house to carry out the necessary development tests.

Terasaki realises optimised products through 3D CAD, software development, mould and sheet metal design, structure design and resin flow analysis.



CAPABILITIES

Safety & Reliability

High MTBF; Low MTTR; temperature monitoring, double control circuits

Approvals

ISO 9001; ISO 14001; OHSAS 18001; Lloyds; BV; GL; GOST; SABS; DEKRA (KEMA); ASTA; IEC 60947-2; IEC 61439; IEC 60898

Asset Management

Retrofits; Preventative Maintenance; Lifecycle Management

Special Protection Solutions

DC; PV; UPS; 1000V AC; Integrated residual protection; 100kA and above



3C Overheating Protection for Contacts, Connections & Conductors



3C BENEFITS

- **LOW INVESTMENT** [system is integrated with circuit breakers]
- **FAST INSTALLATION** [breakers are supplied with sensors already fitted]
- **EASY UPGRADE** [the 3C system can be retrofitted to existing installations]
- **FREE EXTENDED WARRANTY ON NEW CIRCUIT BREAKERS**
[when 3C overheating protection is included with the order]



TemCurve Selectivity Analysis Software

TemCurve Lite 3.0

TemCurve Lite Selectivity Software can assist in protection device grading from the transformer primary to the point of final distribution. The software is designed for the Terasaki range of circuit breakers, but also includes a large number of complimentary protection devices such as low and high voltage fuses and relays.

TemCurve Lite 3.0 is FREE

- The software package is now multilingual allowing you to select from: English, Italian, Spanish, Russian, Swedish, Chinese and Japanese language options
- It can output DXF and PDF files
- Latest product developments included: TemBreak 2 Lite MCCBs and TemBreak 2 CBRs.






5 Reasons to use TemPower 2 ACBs



1. Patented High Performance 5000A and 6300A ACBs

The air circuit breaker interrupts the current at two points on the line side while dissipating heat from contacts or terminals by efficient air convection through pressure valve.



Efficient air convection through a pressure valve


2. Double opening and closing coils

Double Opening and Closing Coils provides extended control system redundancy to an ACB. Double coils allow designers to implement back-up tripping and closing systems. It provides the end-user with ultimate reliability on critical UPS circuits connected to critical loads.




3. Fast interruption by unique "Double Break" system*

The unique "DoubleBreak" main contact system ensures extremely fast interruption of short circuit currents and substantially reduces main contact wear. The internally symmetrical "DoubleBreak" structure means the moving contact is isolated from the supply voltage even when the ACB is reverse connected. TemPower 2 ACBs up to 4000A use DoubleBreak technology.



4. Easy Maintenance

The unique design of TemPower 2 incorporates its isolating clusters and main contacts on the ACB body. The main contacts and isolating clusters may be maintained without having to isolate the switchboard.



5. Replacement of the main contacts*

The fixed and moving contacts can easily be replaced in the field, thus prolonging the life on the circuit breaker. Changing each pole takes around 15 minutes.

*Not available on AR6



CUSTOMER ENDORSEMENT

"The performance of Terasaki's ACBs was proven on site when a main busbar failed in one of the switchrooms. The ACB was reclosed on the short-circuit fault twice during fault diagnosis and is still in operation following a service by Terasaki."

Andy Oswald, BAA
(Airport Operating Company, UK)



Air Circuit Breakers Selection Guide



TemPower 2 ACB

Frame Reference	Quantity	Unit	Condition	AR2			AR3	AR4	AR6	
ACB Model				AR208, AR212, AR216	AR208, AR212, AR216, AR220	AR212, AR216, AR220	AR325, AR332	AR325, AR332	AR440	AR650, AR663
Type				D	S	H	S	H	SB	S
Number of Poles				3, 4	3, 4	3, 4	3, 4	3, 4	3, 4	3, 4
Nominal Current Ratings										
	I_n	A		800,1000,1250,1600	800,1000,1250,1600,2000	1250,1600,2000	2500,2000	2500,2000	4000	5000,6300
Electrical Characteristics										
Rated Operational Voltage	U_c	V		690	690	690	690	690	690	690
Rated Insulation Voltage	U_i	V		1000	1000	1000	1000	1000	1000	1000
Rated Impulse Withstand Voltage	U_{imp}	kV		12	12	12	12	12	12	12
Ultimate Breaking Capacity	I_{cu}	kA	690V AC	42 ⁽²⁾	50 ⁽²⁾	55	65 ⁽²⁾	85	85 ⁽²⁾	85 ⁽²⁾
			440V AC	50	65	80	85	100	100	120
			400/415V AC	50	65	80	85	100	100	120
			250V DC ⁽¹⁾	40	40	40	40	40	40	40
Service Breaking Capacity	I_{cs}	kA	690V AC	32 ⁽²⁾	50 ⁽²⁾	55	65 ⁽²⁾	85	85 ⁽²⁾	85 ⁽²⁾
			440V AC	36	65	80	85	100	100	120
			400/415V AC	36	65	80	85	100	100	120
			250V DC ⁽¹⁾	40	40	40	40	40	40	40
Making Capacity	I_{cm}	kA	690V AC	88 ⁽²⁾	105 ⁽²⁾	121	143	187	187 ⁽²⁾	187 ⁽²⁾
			440V AC	105	143	176	187	220	220	264
			400/415V AC	105	143	176	187	220	220	264
Rated Short-time Withstand Current	I_{cw}	kA	1 Second	50	65	80	85	100	100	120
			3 Seconds	36	50	55	65	75	75	85
Breaking Time		seconds		0.03	0.03	0.03	0.03	0.03	0.03	0.05
Spring Charging Time		seconds		10	10	10	10	10	10	10
Closing Time		seconds		0.08	0.08	0.08	0.08	0.08	0.08	0.08
Utilisation Category				B	B	B	B	B	B	B
Dimensions										
Fixed Type	Height	mm		460	460	460	460	460	-	-
	Width	mm	3 pole	360	360	360	466	466	-	-
	Width	mm	4 Pole	445	445	445	586	586	-	-
	Depth	mm		290	290	290	290	290	-	-
	Weight	kg	3 pole	53	54	54	80	80		
	Weight	kg	4 Pole	59	60	60	92	92		
Drawout Type	Height	mm		460	460	460	460	460	460	460
	Width	mm	3 pole	354	354	354	460	460	460	799
	Width	mm	4 Pole	439	439	439	580	580	580	1034
	Depth	mm		345	345	345	345	345	345	380
	Weight	kg	3 pole Drawout	73	79	79	105	105	126	200
	Weight	kg	4 Pole Drawout	86	94	94	125	125	158	285
Endurance										
Mechanical	Cycles		With maintenance	26000	30000	30000 ⁽³⁾	20000	20000	15000	10000
Mechanical	Cycles		Without maintenance	12500	15000	15000 ⁽³⁾	10000	10000	8000	5000
Electrical	Cycles		Without maintenance at 440V AC	11000	12000	12000 ⁽³⁾	7000	7000	3000	1000
Electrical	Cycles		With maintenance at 440V AC	26000	30000	30000 ⁽³⁾	20000	20000	15000	10000

Notes

- Special versions are available for use at 600V DC, 800V DC, 800V AC, 1000V AC and 1150V AC. Contact us for details
- Not applicable in unearthed (IT) systems
- AR220S

Mechanical (with maintenance) Endurance 25000 Cycles
 Mechanical (without maintenance) Endurance 12000 Cycles
 Electrical (with maintenance) Endurance 25000 Cycles
 Electrical (without maintenance) Endurance 10000 Cycles



Protection Relay Guide



AGR-11B

Protection Functions Dial Adjustment


- L – Long Time
- S – Short Time
- I – Instantaneous

Optional Protection Functions

- Unrestricted Ground Fault
- Neutral Protection

Manual Reset

(Optional AGR-11BL-AS,
AGR-11BL-GS)



AGR-21B

Protection Functions LCD Ammeter

- L – Long Time
- S – Short Time
- I – Instantaneous
- Pre-Trip (load shedding)
- Fault Indication Contacts

Optional Protection Functions

- Ground Fault (Unrestricted or Restricted)
- Neutral Protection
- Communication
- Phase Rotation Protection
- Generator Protection Curves
- IDMT Protection Curves
- Field Test



These features are now
available on AGR-31B H



AGR-31B (H)

Protection Functions Back-Lit Energy Analyser

- L – Long Time
- S – Short Time
- I – Instantaneous
- Pre-Trip (load shedding)
- Fault Indication Contacts

- Harmonic Monitoring
- Event History
- Dual Settings Capability

Optional Protection Functions

- Ground Fault (Unrestricted or Restricted)
- Neutral Protection
- Reverse Power
- Zone Interlocking
- 3C Overheating Protection
- Communication
- Generator Protection Curves
- Phase Rotation Protection
- IDMT Protection Curves
- Under/Over Frequency
- Under/Over Voltage Alarm

Non-Automatic (switch-disconnector) versions without protection are available in every frame size.

TemPower2 ACBs for 800V, 1000V and 1150V AC


High AC voltages are used to minimise cable costs for installations where long cable runs are necessary. Terasaki supply ACBs for large solar farms, mines and railways. The latest additions to our range are the AR316H-V8, AR320H-V8, AR325H-V8 and AR332H-V8, which can all interrupt 30kA at 800V AC.



TemPower 2 AR332H-V8 ACB



ACB Accessories

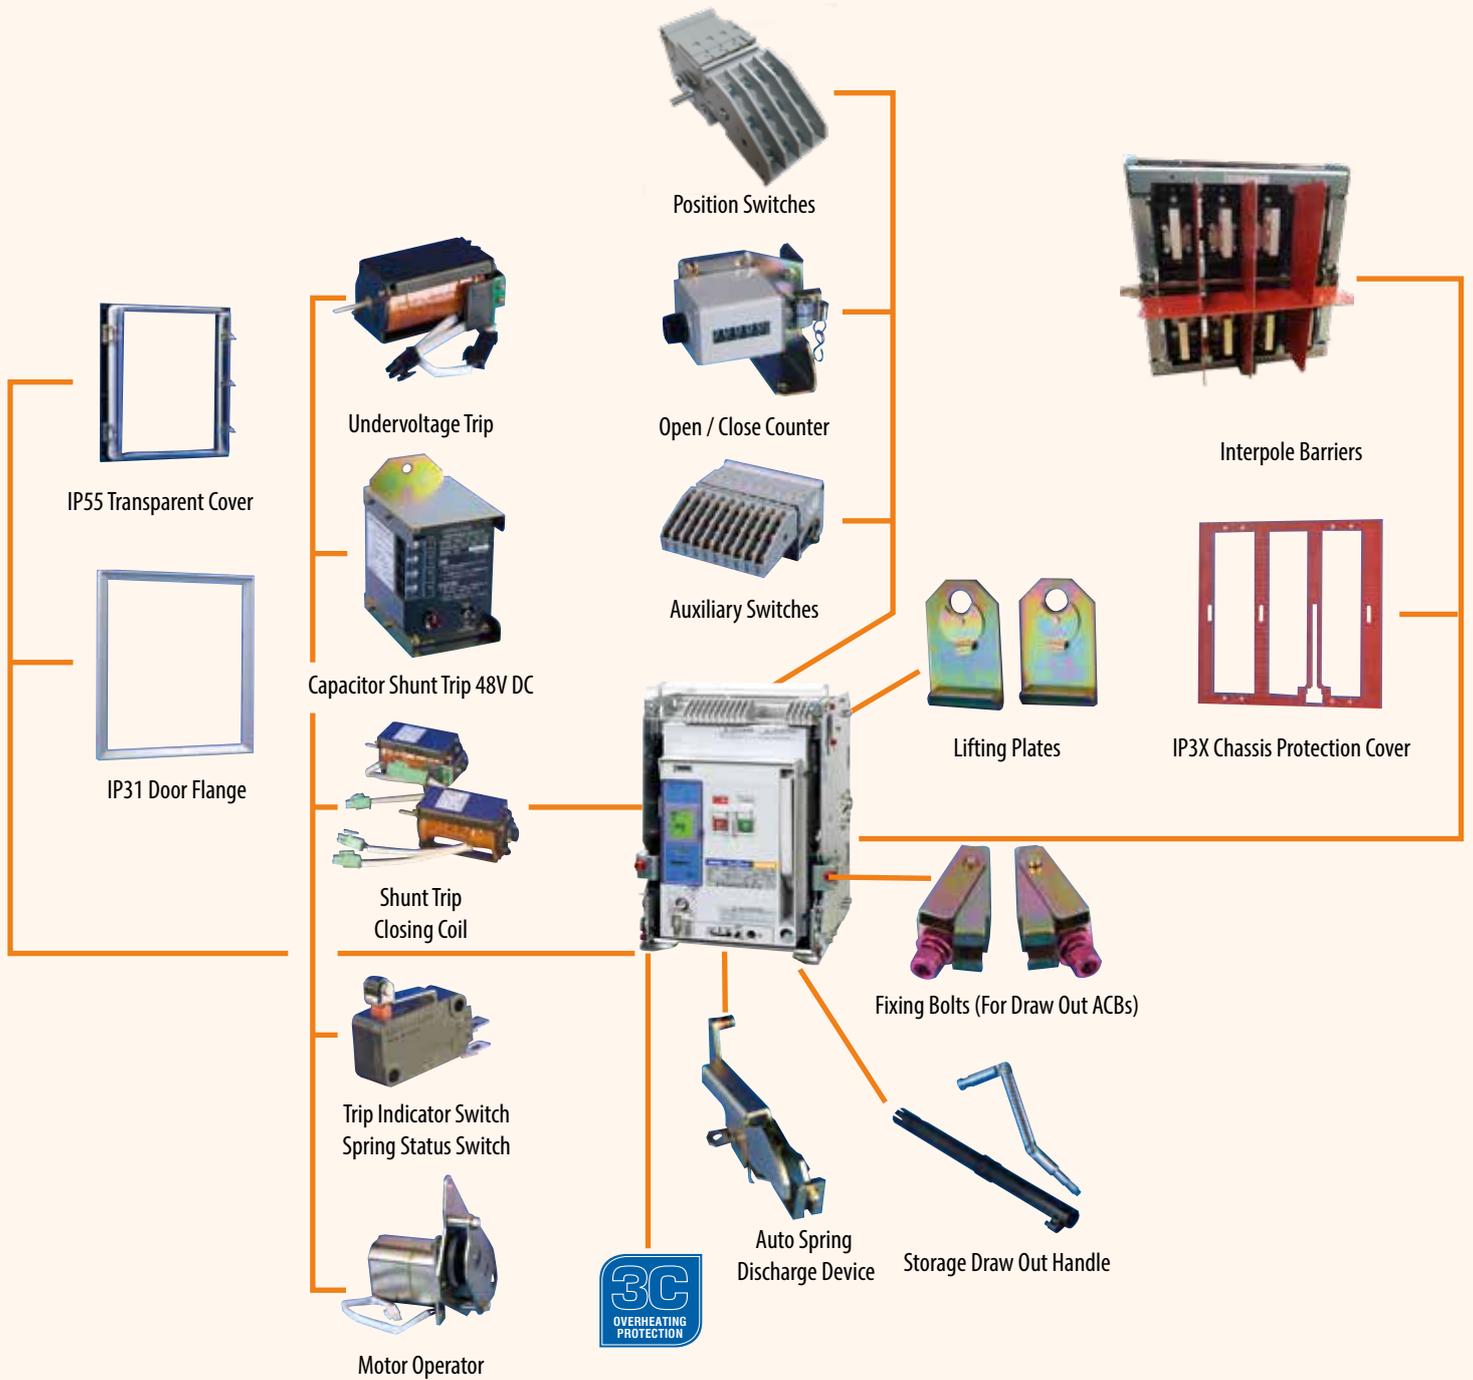

Lifter Loader



Protection Relay Checker




Tropicalisation, Anti-Corrosion, Cold Climate treatments




Test Jumper



Step Down Transformer 440V to 220V



Mechanical Interlock, Key Interlock, Castell Interlock



Shutter Truck



Monitoring and Communication: T2ED

T2ED is a new Terasaki external display for TemPower 2 ACBs and TemBreak 2 MCCBs with integrated communication options. It displays circuit measurements and information about the installed breaker in an easily readable way. T2ED may be used as a stand-alone local display. T2ED is also able to transfer all this information directly to a Modbus network.


Special Features:

View circuit values and breakers data safely from the outside

- Easy direct connection from breaker to T2ED (communication module is inside the breaker)
- Easy direct connection from T2ED to Modbus (no need for additional external communication module)
- Analogue, numerical and bar graph views

Technical Characteristics:

- Rated voltage: DC24V (Applicable range of voltage: DC18 to DC 31V)
- Consumption (at DC24V): 50mA
- Dimensions
- (96 x 96 x 50) mm
- Serial Interface: RS485
- Protocol: Modbus-RTU
- Transmission method: Two-wire half duplex

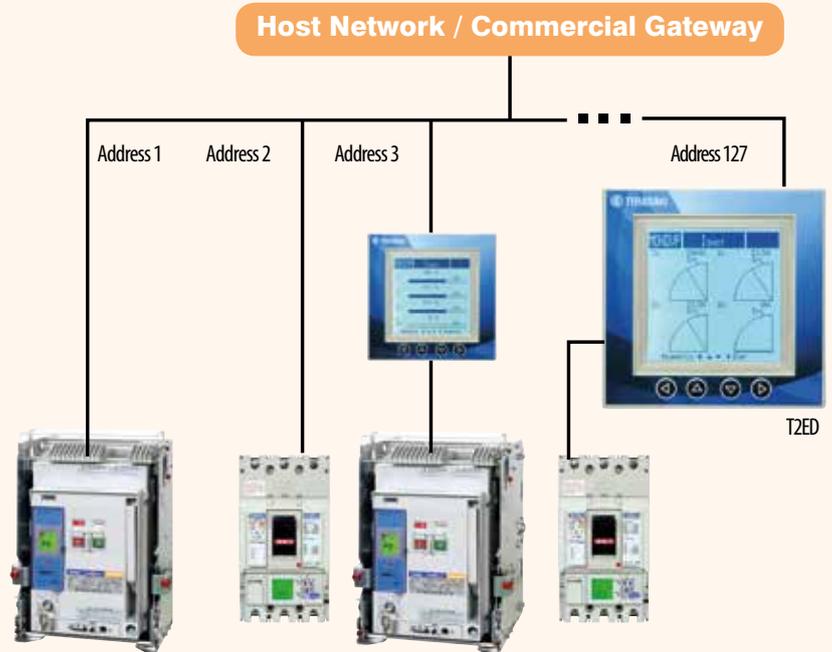

Earth Leakage Protection Relays

Terasaki TemProtect monitoring and control devices provide earth leakage protection and monitoring for most industrial and commercial applications. They are used to monitor earth currents to protect electrical equipment and personnel against dangers such as electric faults.

TemProtect has been designed to be as flexible as possible to suit a wide range of applications. The range includes Din Rail, Panel or base mount versions, relays suitable for use in AC systems (unaffected by DC components which may be present).

All relays comply with international standards including IEC 60255.

ELR-1E



Flush mounted DIN
96x96x60mm unit

ELRC-1



Relay with built-in Toroidal Transformer
Space Saving

ELR-3C



DIN rail mounted unit (DIN 43880 standard)
the three modules width 17.5mm

CTM



Supervision Relay monitors circuit
breakers tripping circuit

- Adjustable tripping current and time delay setting
- Selectable automatic or manual reset facility
- Adjustable time/current multiplier setting
- Test button
- LEDs to indicate the units status




Moulded Case Circuit Breakers

5 Reasons to Use TemBreak 2 MCCBs



1. Electronic Versions with integrated monitoring and communication

Data can be sent to integrated display, local display and Modbus network simultaneously.



*See T2ED on page 22

4. Circuit breaker with integral residual current protection (CBRs) [see page 19]

We offer integrated protection from earth leakage faults, overloads and short-circuits in one device.



2. Smaller 1000A MCCB

It is only 273mm high and 210mm wide - same size as 800A MCCB



5. Direct opening action

The robust mechanism ensures that the force you apply to the toggle is transmitted directly to the contacts. Direct opening action is recommended by IEC 60204-1, Safety of Machinery: Electrical Equipment for Machinery



3. Superior temperature performance

We offer MCCBs for use up to 50°C without derating from 20A to 1600A



CUSTOMER ENDORSEMENT

“Terasaki Electric have supplied circuit breakers for a number of high resilience projects that we have designed, through the selected switchgear suppliers.

They have always provided excellent support to our projects and we have found them to be a good company to partner with on component supply; the selected products provided the ideal solution for our mission critical environments.

We have no hesitation in including Terasaki Electric devices in our designs.”

Karl Luck, WSP (Engineering Consultancy, UK)



Electronic Protection Including Types with Monitoring and Communication

Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, AS/NZS 3947-2, NEMA AB-1

Frame Reference	Quantity	Unit	Condition	TB2 S/H/L 250			
Model				S250	S250	S250	H250
Type				NE	GE	PE	NE
Number of Poles				3,4	3,4	3,4	3,4
Nominal current ratings	I_n	(A)	50°C	40,125,160,250	40,125,160,250	40,125,160,250	40,125,160,250
Monitoring and Communication				●	●	●	●
Electrical characteristics							
Rated Operational voltage	U_e	(V)	AC 50/60 HZ	690	690	690	690
Rated insulation voltage	U_i	(V)		800	800	800	800
Rated impulse withstand voltage	U_{imp}	(kV)		8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC	7.5 25 25 36 65	7.5 25 50 65 85	20 35 50 70 125	20 45 120 125 150
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC	7.5 25 25 36 65	7.5 25 25 36 85	15 35 50 70 125	15 45 80 85 150
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	25 65	25 65	35 125	45 150
Rated short-time withstand current	I_{cw}	(kA)	0.3 sec	–	–	–	–
Utilisation category				A	A	A	A
Dimensions							
	Height	(mm)		165	165	165	165
	Width	(mm)	3 Pole 4 Pole	105 140	105 140	105 140	105 140
	Depth	(mm)		103	103	103	103
	Weight	(kg)	3 Pole 4 Pole	2.5 3.3	2.5 3.3	2.5 3.3	2.5 3.3
Operation							
Endurance	Electrical	cycles	415V AC			10,000	
	Mechanical	cycles				30,000	

Frame Reference	Quantity	Unit	Condition	TB2 H/L 800			TB2 1000		
Model				H800	L800	S800	S800	S1000	S1000
Type				NE	NE	NE	RE	SE	NE
Number of Poles				3,4	3,4	3,4	3,4	3,4	3,4
Nominal current ratings	I_n	(A)	50°C	630,800	630,800	630,800	630,800	1000 ^⑥	1000 ^⑥
Monitoring and Communication				●	●	●	●	●	●
Electrical characteristics									
Rated Operational voltage	U_e	(V)	AC 50/60 HZ	690	690	690	690	690	690
Rated insulation voltage	U_i	(V)		800	800	800	800	800	800
Rated impulse withstand voltage	U_{imp}	(kV)		8	8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC	25 ^① 40 125 125 150	25 ^① 45 180 200 200	20 ^① 30 50 50 85	25 ^① 35 65 70 100	20 ^① 30 45 50 85	25 ^① 45 65 70 100
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC	20 ^① 34 94 94 150	20 ^① 34 135 150 150	20 ^① 30 50 50 85	20 ^① 30 50 50 75	15 ^① 23 34 38 65	20 ^① 34 50 50 75
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	40 150	45 200	30 85	35 100	30 85	45 100
Rated short-time withstand current	I_{cw}	(kA)	0.3 sec	10	10	10	10	–	–
Utilisation category				B	B	B	B	A	A
Dimensions									
	Height	(mm)		273	273	273	273	273	273
	Width	(mm)	3 Pole 4 Pole	210 280	210 280	210 280	210 280	210 280	210 280
	Depth	(mm)		140	140	103	103	103	103
	Weight	(kg)	3 Pole 4 Pole	⑥ ⑦	⑥ ⑦	④ ⑤	④ ⑤	11.0 14.8	11.0 14.8
Operation									
Endurance	Electrical	cycles	415V AC		4,000			4,000	
	Mechanical	cycles			10,000			10,000	

– Not available • Optional ① MCCB cannot be used in IT systems at this voltage ② 100kA at 400V ③ 75kA at 400V ④ 8.7kg 630A, 9.1kg 800A ⑤ 11.9kg 630A, 12.3kg 800A ⑥ 13.3kg 630A, 14.8kg 800A ⑦ 16.8kg 630A, 18.8kg 800A ⑧ Not fully rated at 50°C. Contact Terasaki

TB2 H/L 400		TB2 E/S 630					
H400	L400	S400	S400	S400	E630	S630	S630
NE	NE	NE	GE	PE	NE	CE	GE
3,4	3,4	3,4	3,4	3,4	3,4	3,4	3,4
250, 400	250, 400	250,400	250,400	250,400	630	630	630
●	●	●	●	●	●	●	●
690	690	690	690	690	690 ^①	690 ^①	690 ^①
800	800	800	800	800	800	800	800
8	8	8	8	8	8	8	8
35	50	20	20	20	10 ^①	20 ^①	20 ^①
45	65	30	30	30	15	30	30
120	180	45	65	80	25	45	65
125	200	50	70	85	36	50	70
150	200	85	100	100	50	85	100
35	50	15	15	15	10 ^①	15 ^①	15 ^①
45	65	30	30	30	15	30	30
80	135	45	50	80	25	45	50
85	150	50	50	85	36	50	50
150	150	85	85	85	50	85	85
45	65	25	30	30	15	25	30
150	200	85	100	100	50	85	100
5	5	5	5	5	–	–	–
B	B	B	B	B	A	A	A
260	260	260	260	260	260	260	260
140	140	140	140	140	140	140	140
185	185	185	185	185	185	185	185
140	140	103	103	103	103	103	103
7.1	7.1	4.3	4.3	4.3	5.0	5.0	5.0
9.4	9.4	5.7	5.7	5.7	6.5	6.5	6.5
4,500		4,500					
15,000		15,000					



Electronic overload protection is adjustable from 40% to 100% of rated current.

TB2 1250			TB2 1600	
S1250	S1250	S1250	S1600	S1600
SE	NE	GE	SE	NE
3,4	3,4	3,4	3,4	3,4
800, 1250	800, 1250	800, 1250	1250, 1600	1250, 1600
–	–	–	–	–
690	690	690	690	690
800	800	800	800	800
8	8	8	8	8
20 ^①	25 ^①	45 ^①	20 ^①	45 ^①
30	45	65	30	65
45	65	85	45	85
50	70	100/85 ^②	50	100/85 ^②
85	100	125	85	125
15 ^①	20 ^①	34 ^①	15 ^①	34 ^①
23	34	50	23	50
34	50	65	34	65
38	50	75/65 ^③	38	75/65 ^③
65	75	94	65	94
30	45	65	30	65
85	100	125	85	125
15	15	15	20	20
B	B	B	B	B
370	370	370	370	370
210	210	210	210	210
280	280	280	280	280
120	120	120	140	140
19.8	19.8	19.8	27.0	27.0
25.0	25.0	25.0	35.0	35.0
4,000			2,000	
5,000			5,000	

– Not available • Optional ^① MCCB cannot be used in IT systems at this voltage ^②100KA at 400V ^③75KA at 400V ^④8.7kg 630A, 9.1kg 800A ^⑤11.9kg 630A, 12.3kg 800A ^⑥13.3kg 630A, 14.8kg 800A ^⑦16.8kg 630A, 18.8kg 800A

MCCBS up to 3200A are available. Contact Terasaki for details.



Adjustable Thermal and Adjustable Magnetic Protection

Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, AS/NZS 3947-2, NEMA AB-1

Frame Reference	Quantity	Unit	Condition	TB2 S125			TB2 S250	
Model				S125	S125		S160	S160
Type				NJ	GJ		NJ	GJ
Number of Poles				3,4	3,4		3,4	3,4
Nominal current ratings	I_n	(A)	50°C	20,32,50,63,100,125	20,32,50,63,100,125		20,32,50,63,100,125,160	50,63,100,125,160
Electrical characteristics								
Rated Operational voltage	U_e	(V)	AC 50/60 Hz DC	690 250	690 250		690 250	690 250
Rated insulation voltage	U_i	(V)		800	800		800	800
Rated impulse withstand voltage	U_{imp}	(kV)		8	8		8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC	6	6		7,5 (5*)	7,5
			525V AC	22	25		25(18*)	25
			440V AC	25	50		25(18*)	50
			400/415V AC	36	65		36 (30*)	65
			220/240V AC 250V DC	50 25	85 40		65 (42*) 40 (30*)	85 40
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC	6	6		7,5 (5*)	7,5
			525V AC	22	22		25(18*)	25
			440V AC	25	25		25(18*)	25
			400/415V AC	36/30	36/33		36 (25*)	36
			220/240V AC 250V DC	50 19	85 40		65 (35*) 40 (25*)	85 40
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	22 50	25 85		22(18*) 65(42*)	25 85
Utilisation category				A	A		A	A
Dimensions								
	Height	(mm)		155	155		165	165
	Width	(mm)	3 Pole	90	90		105	105
			4 Pole	120	120		140	140
	Depth	(mm)		68	68		68	68
	Weight	(kg)	3 Pole	1.1	1.1		1.5	1.5
4 Pole			1.4	1.4		1.9	1.9	
Operation								
Endurance	Electrical	cycles	415V AC		30,000			20,000
	Mechanical	cycles			30,000			30,000

Frame Reference	Quantity	Unit	Condition	TB2 S/H/L 250			TB2 E/S 630	
Model				S250	H250	L250	E400	S400
Type				RJ	NJ	NJ	NJ	CJ
Number of Poles				3,4	3,4	3,4	3,4	3,4
Nominal current ratings	I_n	(A)	50°C	160,250	160,250	160,250	250,400	250,400
Electrical characteristics								
Rated Operational voltage	U_e	(V)	AC 50/60 Hz DC	690 250	690 250	690 250	525 250	690 250
Rated insulation voltage	U_i	(V)		800	800	800	800	800
Rated impulse withstand voltage	U_{imp}	(kV)		8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC	20	20	25	–	15
			525V AC	35	45	65	15	22
			440V AC	65	120	180	22	30
			400/415V AC	65	125	200	25	36
			220/240V AC 250V DC	100 40	150 40	200 40	35 25	50 40
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC	15	15	20	–	15
			525V AC	35	45	65	15	22
			440V AC	65	80	135	22	30
			400/415V AC	65	85	150	25	36
			220/240V AC 250V DC	100 40	150 40	150 40	35 19	50 40
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	35 100	45 150	65 200	15 35	22 50
Utilisation category				A	A	A	A	A
Dimensions								
	Height	(mm)		165	165	165	260	260
	Width	(mm)	3 Pole	105	105	105	140	140
			4 Pole	140	140	140	185	185
	Depth	(mm)		103	103	103	103	103
	Weight	(kg)	3 Pole	2.4	2.4	2.4	4.2	4.3
4 Pole			3.2	3.2	3.2	5.6	5.6	
Operation								
Endurance	Electrical	cycles	415V AC		10,000			4,500
	Mechanical	cycles			30,000			15,000

① MCCB cannot be used in IT systems at this voltage *Applies only to 20A and 32A models – Not available

TB2 S250		TB2 S/H/L 250				
S250	S250	S125	H125	L125	H160	L160
NJ	GJ	RJ	NJ	NJ	NJ	NJ
3,4	3,4	3,4	3,4	3,4	3,4	3,4
160,200,250	160,200,250	20,32,50,63,100,125			160	160
690	690	690	690	690	690	690
250	250	250	250	250	250	250
800	800	800	800	800	800	800
8	8	8	8	8	8	8
7.5	7.5	20	20	25	20	25
25	25	35	45	65	45	65
25	50	65	120	180	120	180
36	65	65	125	200	125	200
65	85	100	150	200	150	200
40	40	40	40	40	40	40
7.5	7.5	15	15	20	15	20
25	25	35	45	65	45	65
25	25	65	80	135	80	135
36	36	65	85	150	85	150
65	85	100	150	150	150	150
40	40	40	40	40	40	40
22	25	35	45	65	45	65
65	85	100	150	200	150	200
A	A	A	A	A	A	A
165	165	165	165	165	165	165
105	105	105	105	105	105	105
140	140	140	140	140	140	140
68	68	103	103	103	103	103
1.5	1.5	2.4	2.4	2.4	2.5	2.5
1.9	1.9	3.2	3.2	3.2	3.3	3.3
10,000		30,000			20,000	
30,000		30,000			30,000	



Thermal protection is adjustable from 63% to 100% of rated current.

TB2 E/S 630			TB2 1000		
S400	S400	S400	S800	S800	S800
NJ	GJ	PJ	CJ	NJ	RJ
3,4	3,4	3,4	3,4	3,4	3,4
250,400	250,400	250,400	630,800	630,800	630,800
690	690	690	690	690	690
250	250	250	250	250	250
800	800	800	800	800	800
8	8	8	8	8	8
20	20	20	10 ^①	20 ^①	25 ^①
30	30	30	15 ^①	30	45
45	65	80	30	50	65
50	70	85	36	50	70
85	100	100	50	85	100
40	40	40	50	50	50
15	15	15	10 ^①	20 ^①	20 ^①
30	30	30	15 ^①	30	34
45	50	80	30	50	50
50	50	85	36	50	50
85	85	85	50	85	75
40	40	40	50	50	50
25	30	30	15	30	65
85	100	100	50	85	200
A	A	A	A	A	A
260	260	260	273	273	273
140	140	140	210	210	210
185	185	185	280	280	280
103	103	103	103	103	103
4.2	4.2	4.2	8.5	8.5	8.5
5.6	5.6	5.6	11.5	11.5	11.5
4,500			4,000		
15,000			10,000		



TemBreak 2 Lite

Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, AS/NZS 3947-2, NEMA AB-1

Frame Reference	Quantity	Condition	TB2 Lite 160							
			E160	E160	E160	S160	S160	S160	S160	S160
Model			E160	E160	E160	S160	S160	S160	S160	S160
Type			SF	SF	SJ	SCF	SCJ	SHJ	SF	SJ
Number of Poles			1	3,4	3,4	3,4	3,4	3,4	3,4	3,4
Nominal current ratings	I_n (A)	50°C	16,20,25,32,40,50,63,80,100,125	16,20,25,32,40,50,63,80,100,125,160	20,40,63,80,100,125,160	16,20,25,32,40,50,63,80,100,125,160	25,40,63,80,100,125,160	25,40,63,80,100,125,160	16,20,25,32,40,50,63,80,100,125,160	25,40,63,80,100,125,160
Electrical characteristics										
Rated Operational voltage	U_e (V)	AC 50/60 Hz DC	240 –	525 250	525 250	525 250	525 250	525 250	690 250	690 250
Rated insulation voltage	U_i (V)		690	690	690	690	690	690	690	690
Rated impulse withstand voltage	U_{imp} (kV)		8	8	8	8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu} (kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	– – – – 25 –	– 6 10 16 25 13	– – 10 16 25 13	– 7.5 15 25 35 20	– 7.5 15 25 35 20	– 7.5 7.5 25 35 20	6 10 25 40 50 25	6 10 25 40 50 25
Service Breaking Capacity (IEC, JIS, AS/NZS)	I_{cs} (kA)	690V AC 525V AC 440V AC 400/415C AC 220/240V AC 250V DC	– – – – 13 –	– 3 5 8 13 7	– 3 5 8 13 7	– 4 7.5 13 18 10	– 4 7.5 13 18 10	– 4 4 25 25 10	3 7.5 13 20 25 13	3 7.5 13 20 25 13
Rated breaking capacity (NEMA)	(kA)	480V AC 240V AC	– 25	6 25	6 25	7.5 35	7.5 35	– –	10 50	10 50
Protection										
Fixed Thermal, fixed magnetic			☐	☐	–	☐	–	–	☐	–
Adjustable thermal, fixed magnetic			–	–	☐	–	☐	☐	–	☐
Dimensions										
	Height (mm)		130	130	130	130	130	130	130	130
	Width (mm)	3 Pole (4 Pole)	25 (1P)	75, (100)	75, (100)	75, (100)	75, (100)	75, (100)	75, (100)	75, (100)
	Depth (mm)		68	68	68	68	68	68	68	68
	Weight (kg)	3 Pole (4 Pole)	0.3 (1P)	0.8 (1.0)	0.8 (1.0)	0.8 (1.0)	0.8 (1.0)	0.8 (1.0)	0.8 (1.0)	0.8 (1.0)
Endurance										
Electrical	415V		10,000					10,000 ^①		
Mechanical			20,000					20,000		

Frame Reference	Quantity	Condition	TB2 Lite 250					
			E250	E250	E250	E250	S250	S250
Model			E250	E250	E250	E250	S250	S250
Type			SCF	SCJ	SF	SJ	SF	SJ
Number of Poles			3, 4	3, 4	3, 4	3, 4	3, 4	3, 4
Nominal current ratings	I_n	50°C	125,150,175,200,225,250	100,125,160,200,250	125,150,175,200,225,250	100,125,160,200,250	125,150,175,200,225,250	160,200,250
Electrical characteristics								
Rated Operational voltage	U_E (V)	AC 50/60 Hz DC	525 250	525 250	525 250	525 250	690 250	690 250
Rated insulation voltage	U_i (V)		690	800	690	800	690	800
Rated impulse withstand voltage	U_{imp} (kV)		8	8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu} (kA)	690V AC 525V AC 440V AC 400/415C AC 220/240V AC 250V DC	– 6 10 16 25 13	– 6 10 16 25 13	– 7.5 15 25 35 15	– 7.5 15 25 35 15	4 10 30 40 85 25	4 10 30 40 85 25
Service Breaking Capacity (IEC, JIS, AS/NZS)	I_{cs} (kA)	690V AC 525V AC 440V AC 400/415C AC 220/240V AC 250V DC	– 3 5 8 13 7	– 3 5 8 13 7	– 6 12 19 27 12	– 6 12 19 27 12	4 7.5 15 20 43 13	4 7.5 15 20 43 13
Rated breaking capacity (NEMA)	(kA)	480V AC 240V AC	6 25	6 25	10 35	10 35	25 85	25 85
Protection								
Fixed Thermal, fixed magnetic			☐	–	☐	–	☐	–
Adjustable thermal, adjustable magnetic			–	☐	–	☐	–	☐
Dimensions								
	Height (mm)		165	165	165	165	165	165
	Width (mm)	3 Pole (4 Pole)	105 (140)	105 (140)	105 (140)	105 (140)	105 (140)	105 (140)
	Depth (mm)		68	68	68	68	68	68
Weight	Weight (kg)	3 Pole (4 Pole)	1.5 (1.9)	1.5 (1.9)	1.5 (1.9)	1.5 (1.9)	1.5 (1.9)	1.5 (1.9)
Endurance								
	Electrical	415V					6,000	
	Mechanical						18,000	

– Not available ☐ Standard ① 14,000<125A



Circuit Breakers with Integral Residual Current Protection (CBR)

Electrical Characteristics to IEC 60947-1, IEC 60947-2, IEC 60947-2 ANNEXEB, IEC 60755

Frame Reference	Quantity	Unit	Condition	TB2 S125			TB2 S250		
Model				ZE125	ZS125	ZS125	ZE250	ZS250	ZS250
Type				NJ	NJ	GJ	NJ	NJ	GJ
Number of Poles				3,4	3,4	3,4	3,4	3,4	3,4
Nominal current ratings	I_n	(A)	50°C	20,32,50,63,100,125	20,32,50,63,100,125	20,32,50,63,100,125	160,250	160,250	160,250
Electrical characteristics									
Rated Operational voltage	U_e	(V)	AC 50/60 HZ	525	525	525	525	525	525
Rated insulation voltage	U_i	(V)		525	525	525	525	525	525
Rated impulse withstand voltage	U_{imp}	(kV)		8	8	8	8	8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	525V AC	8	22	25	10	25	25
			440V AC	15	25	50	15	25	50
			400/415V AC	25	36	65	25	36	65
			220/240V AC	35	50	85	35	65	85
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	525V AC	6	22	22	7.5	25	25
			440V AC	12	25	25	12	25	25
			400/415V AC	19	36/30	36/33	19	36	36
			220/240V AC	27	50	85	27	65	85
Protection									
Adjustable thermal, fixed magnetic, residual/earth leakage				<input type="checkbox"/>					
Dimensions									
	Height	(mm)		155	155	155	165	165	165
	Width	(mm)	3 Pole	90	90	90	105	105	105
	Depth	(mm)	4 Pole	120	120	120	140	140	140
				68	68	68	68	68	68
	Weight	(kg)	3 Pole	1.1	1.1	1.1	1.5	1.5	1.5
			4 Pole	1.4	1.4	1.4	1.9	1.9	1.9
Operation									
Endurance	Electrical	cycles	415V AC		30,000			10,000	
	Mechanical	cycles			30,000			10,000	

- Not available Standard



Residual current protection settings: 30mA, 100mA, 300mA, 500mA, 1000mA and 3000mA.

What is a CBR?

Integral CBR – “circuit breakers... which incorporate the residual current function as an integrated feature”:

IEC 60947-2 Annex B.

In other words a CBR is a moulded-case circuit breaker equivalent of a DIN-modular RCBO – it includes overload, short-circuit and residual current protection inside a single device.

How can a CBR give me a cost advantage?

When CBR is used as the supply connection device and is set to 30 mA, RCBOs are not required on outgoing load circuits for electric shock protection (unless discrimination is required).

The residual current protection provided by the supply connection device covers all load circuits. MCBs may be used to protect load circuits and the installation will still meet the requirements for electric shock protection “RCD”



Moulded Case Circuit Breakers for Special Applications

Circuit Breakers with $I_{cu}=70kA$ at 690V AC



High performance at the distribution voltages found in marine applications. Terasaki supply more switchgear to ships than any other manufacturer worldwide.



Circuit Breakers and Switch Disconnectors for 800V and 1000V AC



High AC voltages are used to minimise cable costs for installations where long cable runs are necessary. Terasaki supply MCCBs and switch-disconnectors for large solar farms, mines and railways. The latest addition to our range is the VE400-NE which can interrupt 30kA at 800V AC.



Circuit Breakers and Switch Disconnectors up to 1000V DC



We have developed special version of MCCBs to protect systems with DC voltages above 250V. Our range extends to 1000V DC and are often used to protect solar energy plants.



Switch-Disconnectors



Every frame size includes a switch-disconnector version without integral protection. Internal and external accessories are compatible with switch-disconnector versions.



Low Instantaneous




The available short-circuit output of generators is lower than typical transformers. Sometimes MCCBs with sensitive instantaneous protection are necessary for use with generators.






MCCB Accessories

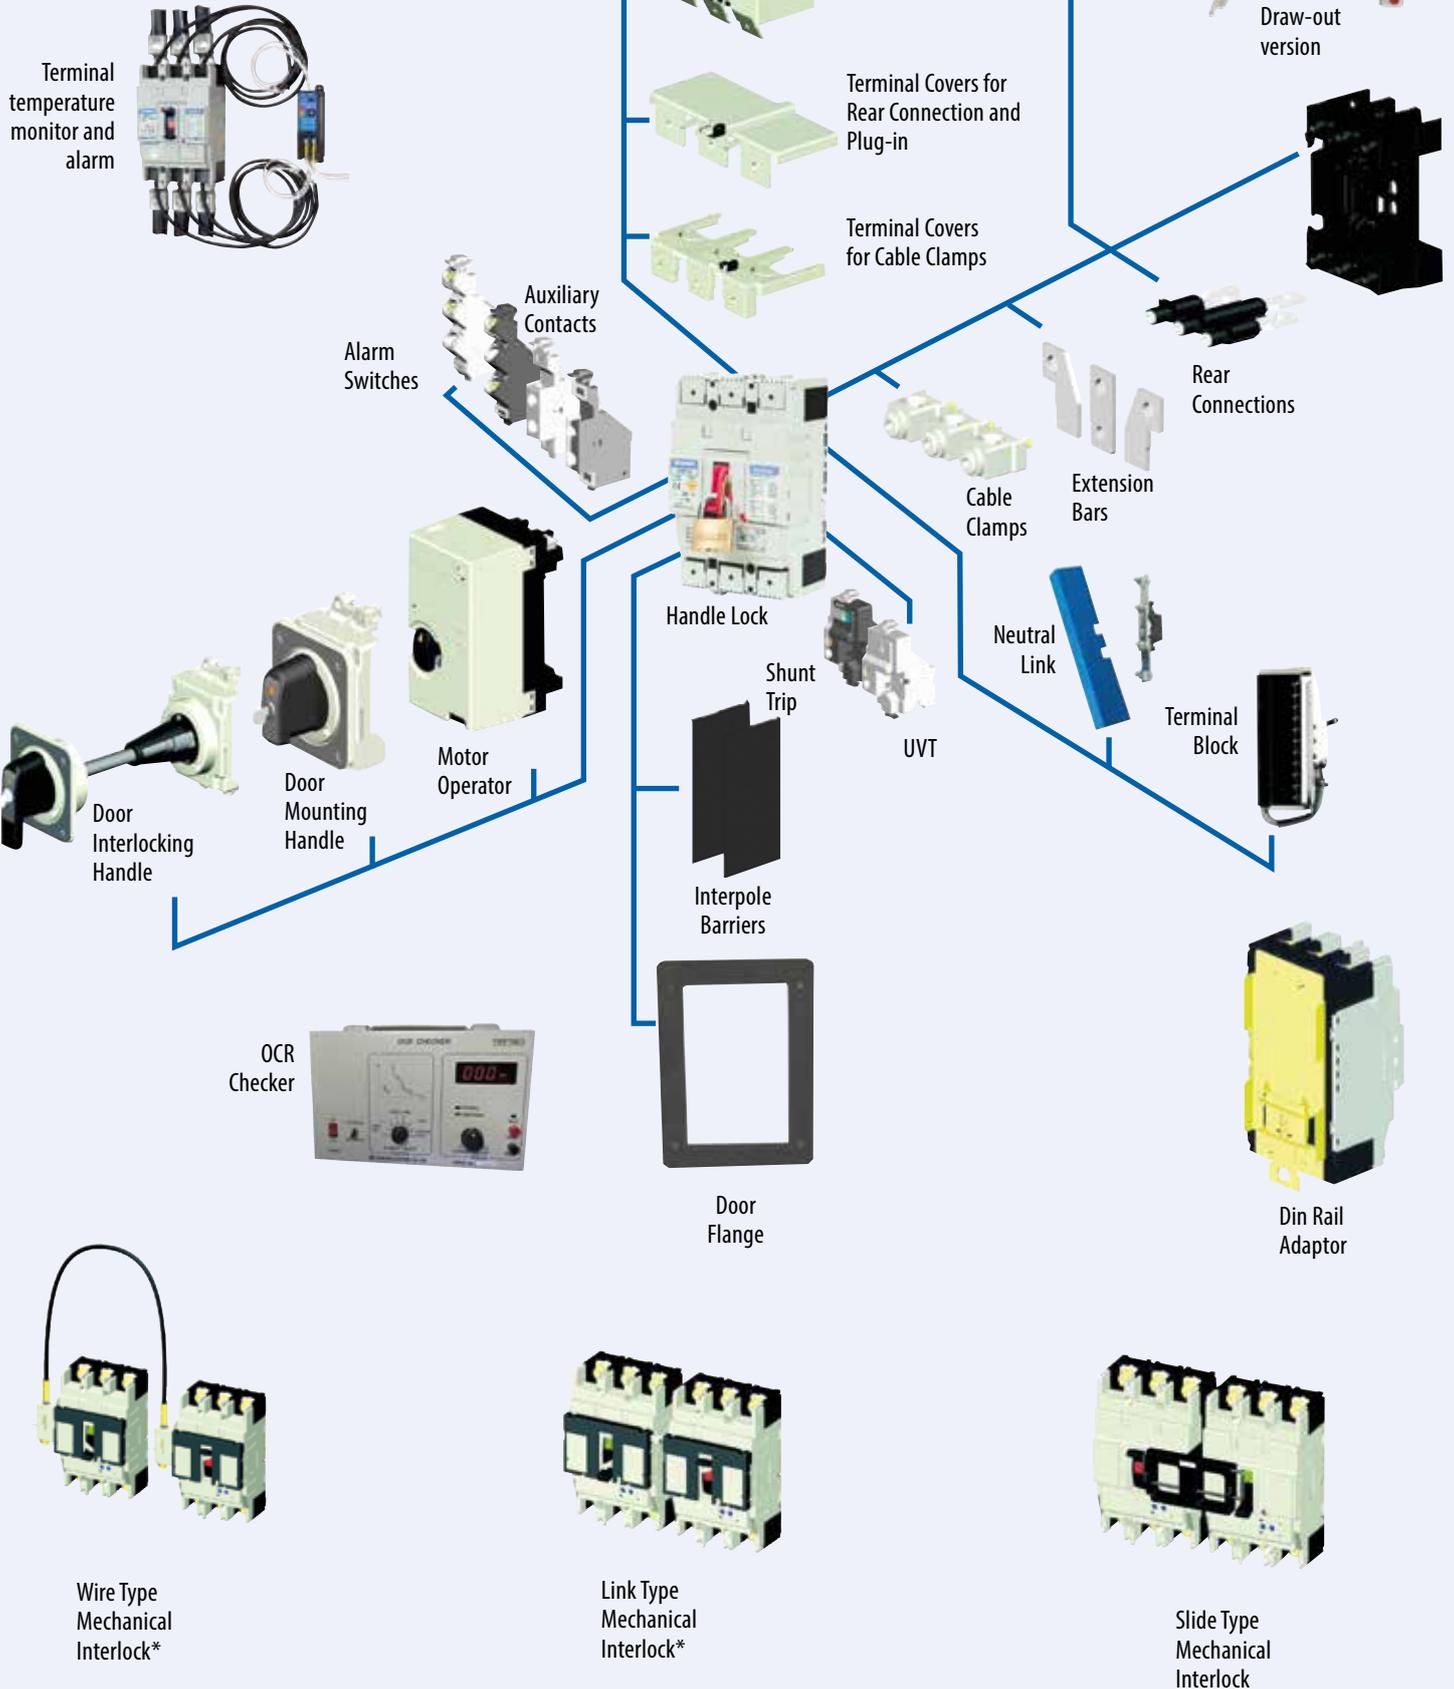

*Compatible with motor operator or either handle.



Retrofit Concept

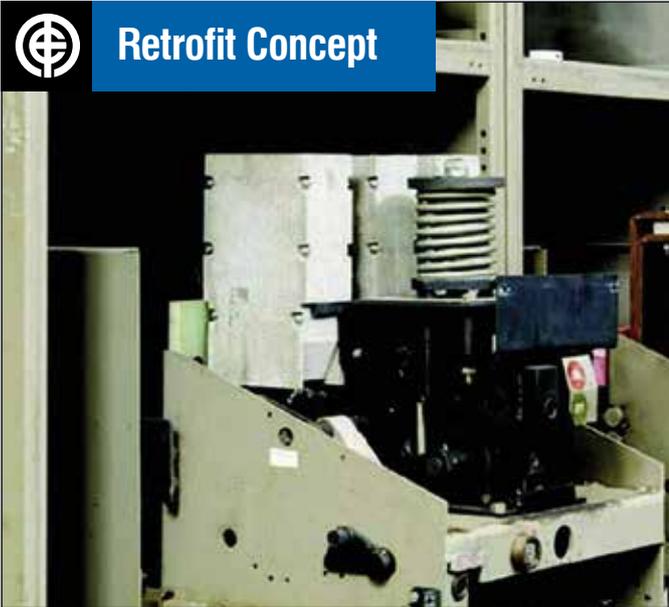

Retrofitting refers to the addition of new technology to older systems. Retrofit ACBs can replace ageing, unsafe switches and circuit breakers.

Top 5 reasons to use Retrofit

- 1. Improve safety and functionality**
Modern circuit breakers offer safer interlocks, remote switching and circuit monitoring.
- 2. Optimise existing plant**
Static components in a switchboard (the steelwork and busbar system) can be retained. Only the functional, moving parts (the circuit breakers) are replaced. Retrofitting is typically 80% cheaper than switchboard replacement with minimum downtime.
- 3. Guaranteed spares availability**
Terasaki guarantee spare parts availability for at least 10 years after the withdrawal from sale of a circuit breaker.
- 4. Modernise the protection system**
Old protection relays can be removed and replaced with modern microprocessor protection which is integral to the ACB. It is then easier to interface the ACB with automatic plc controls.
- 5. Reduce arc flash hazard**
Modern ACBs clear short-circuits much faster than older types. This means that the incident arc energy is correspondingly lower.

Retrofit Services


Terasaki's Retrofit Services

We prefer to conduct a site survey for every retrofit project - even if the breaker to be replaced is already on our design database. This ensures that the installation is as quick as possible, with minimum disruption to the client's supply.

Mechanical and electrical interfaces are modelled using state-of-the-art 3-D CAD.

Manufacture, assembly and routine testing is carried out at Terasaki's facility in Glasgow, Scotland. The factory and processes are certified to the ISO 9001 quality management standard.

Some of our Retrofit designs can be installed without a shutdown. Where this is not possible, our team will ensure that disruption is minimised.



Verified Designs

Third Party Technical Report.

Tested to current standard

ASTA tested to IEC 61439 for short-circuit withstand (Icw) GEC MPact Ellison English Electric

Low voltage arc hazard reduction

1. Remove switching using umbilical cord controller
2. Faster opening time reduces incident arc energy. TemPower 2 ACB can be set to open a short-circuit in less than 30 milliseconds (typically at least twice as fast as the device it will replace).

Modern protection

The AGR Protection relay can replace the functions of several devices in an existing switchboard to provide:

- restricted earth fault protection
- overcurrent protection
- data communication to BMS or SCADA
- plc control

We design retrofit ACBs on request. If you are interested in a brand which is not shown below we would be happy to examine it. New designs are continually added to our portfolio. Check the latest list on the Terasaki website: www.terasaki.co.uk

- Terasaki
- Ellison
- GEC
- Merlin Gerin
- Siemens
- Unelec
- Square D
- Schneider
- Mitsubishi
- Sace
- ABB
- Hyundai
- AEG
- English Electric
- MEM
- Klockner Moeller
- GE Electric



Retrofit Case Study

Terasaki Retrofit Project Reference

Client: Royal Bank of Canada
Project: Retrofit
Location: 71 Queen Victoria Street, London
Retrofit: 24 x Merlin Gerin Selpact 1000A
 3 x Merlin Gerin DA 4000A
Type: to TemPower 2

Capability:

- 27 circuit breakers replace by TemPower 2 retrofit ACBs
- Only one week-end shutdown
- No disturbance to switchboard or copperwork
- Safe and fast



Direct Response Engineer Installing Retrofit ACB

REPLACEMENT OF 27 MERLIN GERIN ACBS WITH TERASAKI ACBS

The main electrical incomer to Royal Bank of Canada’s UK headquarters in London was tripping spuriously and engineers became worried that a sudden and complete failure of the power supply could result. The faulty device, a Merlin Gerin DA 4000 ACB, was obsolete and irreparable. 26 other Selpact and DA 4000 ACBs in the switchboard were also obsolete.

Engineers had permission to shut down the main power supply for only one weekend – not long enough for the switchboard to be replaced or for any modifications to be made to the copperwork.

Terasaki’s Direct Response Service Division had what they needed: a retrofit solution. The Terasaki TemPower 2 retrofit ACBs were designed to match the connections and mountings of the existing ACBs exactly. There was no need to modify the switchboard and all 27 ACBs were replaced safely and quickly.

Retrofit Details

- Merlin Gerin DA 4000 x 3
- Merlin Gerin Selpact x 24
- Building power down: 10:00 Friday
- 27 Terasaki TemPower 2 retrofit ACBs installed
- Building re-energised 12:00 Sunday



DA 4000 ACB:
Access Restricted Due to Nuisance Tripping



Obsolete Merlin Gerin Selpact ACBs



Spares Policy (Circuit Breakers)

Terasaki guarantees availability of breaker spare parts for at least 10 years after the breaker’s withdrawal from sale. Beyond that period the Direct Response Service Division will continue to support older products in the field carrying out routine maintenance and repairs on-site.

The Direct Response Service Division can provide a recommended spares list, based on the specification of all breakers on site. We usually recommend a combination of “complete” and “component” spares.

Warranty Extension

Terasaki offers one year standard warranty for our breakers. However you can extend it up to 4 or 5 years depending on project requirements.





Terasaki supply a complete range of power factor correction products for low voltage systems. Quality and reliability of our equipment is guaranteed.


Capacitors

- meet the requirements of IEC 60831-1/2, IEC 60439-1.

Modular Cassettes

We offer standard modular cassettes for switchboard installation:

- Simple to install inside a cabinet
- Can be supplied with or without busbar and reactors
- Fitted with discharge resistors guaranteeing voltage reduction at the terminals
- All units are supplied with Terasaki contactors suitable for capacitive loads

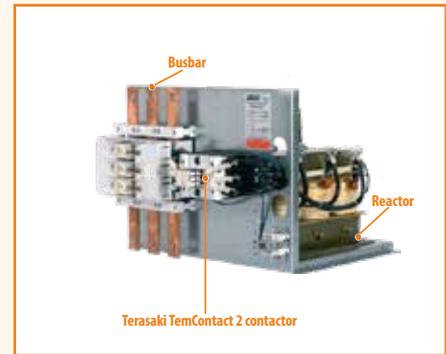

Modular Cassette Unit

Regulators

with microprocessor management for 6, 8 or 12 steps activation

- with Total Harmonic Distortion as a percentage of current (THD 1%) control
- with temperature sensing and
- with full auto/manual settings.



Regulators

Freestanding and Wall Mounted Units

A complete range available. Equipped with:

- cooling fins
- cooling fans for larger units
- standard colour RAL 7032
- automatic power factor correction regulators and
- fast tripping disconnecting switch interlocked with the door.



Capacitors



TemContact 2 Contactors

TemContact 2 is a range of magnetic contactors and thermal overload relays. Current ratings from 6A to 800A are available in 9 frame sizes and in 3 or 4 pole versions.

TemContact 2 has upgraded insulation voltage (increased from 690 to 1000V AC) impulse withstand voltage (increased from 6 to 8kV) in contactors over 40A.

Optional Accessories:

- Auxiliary contacts
-
- Surge absorption unit
- Reversing connection kit
- Mechanical interlock
- Safety cover for front of mechanism
- Overload relays
- Remote mounting kit for overload relay
- Pre-loading resistors for capacitor switching
- Mechanical latch
- Remote reset device for overload relays





Contactors Selection Guide 3P



Model	Parameter	Unit	TC-9b	TC-12b	TC-18b	TC-22b	TC-32a	TC-40a	TC-50a	TC-65a
Frame size			22 AF				40 AF		65 AF	
Current and power ratings										
Thermal current	AC1	A	25	25	40	40	50	60	70	100
Switching power	200/240V AC3	kW	2.5	3.5	4.5	5.5	7.5	11	15	18.5
Switching current	200/240V AC3	A	11	13	18	22	32	40	55	65
Switching power	380/440V AC3	kW	4	5.5	7.5	11	15	18.5	22	30
Switching current	380/440V AC3	A	9	12	18	22	32	40	50	65
Switching power	500/550 AC3	kW	4	7.5	7.5	15	18.5	22	30	33
Switching current	500/550 AC3	A	7	12	13	20	28	32	43	60
Switching power	690V AC3	kW	4	7.5	7.5	15	18.5	22	30	33
Switching current	690V AC3	A	6	9	9	18	20	23	28	35
Electrical characteristics										
Rated operational voltage	U_e	V	690				690		690	
Rated insulation voltage	U_i	V	690				1000		1000	
Rated frequency	f	Hz	50/60				50/60		50/60	
Rated impulse withstand voltage	U_{imp}	kV	6				8		8	
Operation										
Maximum operating rate Endurance	AC3	ops/hr	1800				1800		1800	
	Mechanical	million	15				15		12	
	Electrical	million	2.5				2.5		2	
Dimensions										
AC Control	Weight	kg	0.34				0.55		1.05	
	Size (WxHxD)	mm	45 x 73.5 x 86				69 x 83 x 93		79 x 106 x 119	
DC Control	Weight	kg	0.51				0.77		1.3	
	Size (WxHxD)	mm	45 x 73.5 x 104				69 x 83 x 120		79 x 106 x 147	
Nema size			00	00	0	1	1	1	2	2
Auxiliary Contacts										
Auxiliary Contacts (included as Standard)			1NO 1NC				2NO 2NC		2NO 2NC	

TK Type Thermal Overload relays



Model	Parameter	Unit	TK-32	TK-32	TK-63
Electrical Characteristics					
Rated operational voltage,	U_e	V	690	690	690
Rated insulation voltage	U_i	V	690	690	690
Rated impulse withstand voltage	U_{imp}	kV	6	6	6
Setting range					
Setting range		A	0.1~40	0.1~40	4~65
Trip class			10A,20	10A,20	10A,20
Dimensions					
	Weight	kg	0.17	0.17	0.31/0.33
	Size (WxHxD)	mm	45 x 75 x 90	45 x 75 x 90	55 x 81 x 100



TC-75a	TC-85a	TC-100a	TC-130a	TC-150a	TC-185a	TC-225a	TC-265a	TC-330a	TC-400a	TC-500a	TC-630a	TC-800a
100 AF			150 AF			225 AF		400 AF			800 AF	
110	135	160	160	210	230	275	300	350	450	580	660	900
22	25	30	37	45	55	75	80	90	125	147	190	220
75	85	105	130	150	185	225	265	330	400	500	630	800
37	45	55	60	75	90	132	147	160	200	265	330	440
75	85	105	130	150	185	225	265	330	400	500	630	800
37	45	55	60	70	110	132	147	160	225	265	330	500
64	75	85	90	100	180	200	225	280	350	400	500	720
37	45	55	55	55	110	140	160	200	250	300	400	500
42	45	65	60	60	120	150	185	225	300	380	420	630
690			690			690		690			690	
1000			1000			1000		1000			1000	
50/60			50/60			50/60		50/60			50/60	
8			8			8		8			8	
1800			1200			1200		1200			1200	
12			5			5		5	2.5	2.5		
2			1			1		1	0.5	0.5		
1.9			2.4			5.4		9.2			22.4	
94 x 140 x 137			119 x 158 x 132			138 x 203 x 185		163 x 243 x 205			285 x 312 x 245	
2.8			2.3			5.4		9.2			22.4	
94 x 140 x 172.3			119 x 158.5 x 132			138 x 203 x 185		163 x 243 x 205			285 x 312 x 245	
2	3	3	3	4	4	4	5	5	5	6	6	7
2NO 2NC			2NO 2NC			2NO 2NC		2NO 2NC			2NO 2NC	



TK-95	TK-150	TK-225	TK-400	TK-800
690	690	690	690	690
690	690	690	690	690
6	6	6	6	6
7~100	34~150	64~240	85~400	200~800A
10A,20	10A,20	10A,20	10A,20	10A,20
0.48/0.5	0.67	2.5	2.6	11.5
70 x 97 x 110	95 x 109 x 113	147 x 141 x 184	151 x 171 x 198	860 x 530 x 212



Contactors Selection Guide 4P



Model	Parameter	Unit	TC-6a/4	TC-9a/4	TC-12a/4	TC-18a/4	TC-22a/4	TC-32a/4	TC-40a/4	TC-50a/4	TC-65a/4	TC-75a/4	TC-85a/4
Frame size			18 AF				22 AF	40 AF		85 AF			
Current and power ratings													
Thermal current		A	25	25	25	40	40	50	60	80	100	110	135
Switching power	200/240V AC1	kW	9	9	9	15	15	18	22	30	37	41	51
Switching current	200/240V AC1	A	25	25	25	40	40	50	60	80	100	110	135
Switching power	380/440V AC1	kW	17	17	17	27	27	35	42	56	70	76	95
Switching current	380/440V AC1	A	25	25	25	40	40	50	60	80	100	110	135
Switching power	200/240V AC3	kW	2.2	2.5	3.5	4.5	5.5	7.5	11	15	18.5	22	25
Switching current	200/240V AC3	A	9	11	13	18	22	32	40	55	65	75	85
Switching power	380/440V AC3	kW	3	4	5.5	7.5	11	15	18.5	22	30	37	45
Switching current	380/440V AC3	A	7	9	12	18	22	32	40	50	65	75	85
Electrical characteristics													
Rated operational voltage	U_e	V	690				690	690		690			
Rated insulation voltage	U_i	V	690				690	690		1000			
Rated frequency	f	Hz	50/60				50/60	50/60		50/60			
Rated impulse withstand voltage	U_{imp}	kV	6				6	6		8			
Operation													
Maximum operating rate Endurance	AC3	ops/hr	1800				1800	1800		1800			
	Mechanical	million	15				15	15		12			
	Electrical	million	2.5				1	1		1			
Dimensions													
AC Control	Weight	kg	0.33				0.4	0.59		1.2			
	Size (WxHxD)	mm	45 x 73.5 x 82				47.2 x 80 x 86.8	59 x 83.5 x 94.5		91 x 123.5 x 117.8			
DC Control	Weight	kg	0.5				0.5	0.7		1.29			
	Size (WxHxD)	mm	45 x 73.5 x 97				47.2 x 80 x 113.2	59 x 83.5 x 121		91 x 123.5 x 117.8			
Nema size			00	00	0	0	1	1	1	2	2	2	3
Aux Contacts													
Aux Contacts (Standard)			-				-	-		-			

Capacitor Unit



Capacitor Unit is connected to the terminals of the contactor to reduce the high inrush current.

Features of the Capacitor Unit (Pre-loading resistor):

- Damping resistor than can limit the inrush current up to 60 x I_n is connector to the mechanism that closed earlier than the main contact of the contactor
- No heat loss by the serial resistor
- Eliminate the switching surge
- Improving the performance of the capacitor system




TC-100/4	TC-130a/4	TC-150a/4	TC-185a/4	TC-225a/4	TC-265a/4	TC-330a/4	TC-400a/4	TC-500a/4	TC-630a/4	TC-800a/4
225 AF					400 AF			800 AF		
160	165	250	300	330	360	420	500	650	750	900
57	60	76	87	100	115	135	160	245	255	310
150	155	200	230	260	300	350	420	630	660	800
106	110	142	165	185	215	250	300	450	470	570
150	155	200	230	260	300	350	420	630	660	800
30	37	95	55	75	80	90	125	147	190	220
105	125	150	185	225	265	330	400	500	630	800
55	60	75	90	132	147	160	200	265	330	440
105	120	150	185	225	265	330	400	500	630	800
690					690			690		
1000					1000			1000		
50/60					50/60			50/60		
8					8			8		
1200					1200			1200		
15					15			12		
0.8					0.5			2.5		
5.6					9.9			26.3		
175 x 203 x 185					206 x 243 x 205			346 x 310 x 244		
5.6					9.9			26.3		
175 x 203 x 185					206 x 243 x 205			346 x 310 x 244		
3	3	4	4	4	5	5	5	6	6	7
2N02NC					2N02NC			2N02NC		


Capacitor Unit

Operation Sequence:


Capacitor unit: **OFF**
 Contactor: **OFF**

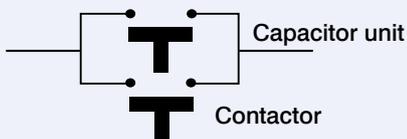

Capacitor unit: **ON**
 Contactor: **OFF**

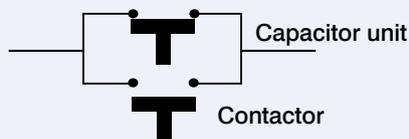

Capacitor unit: **OFF**
 Contactor: **ON**

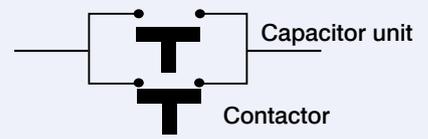



PRO-DB DISTRIBUTION BOARDS

Pro-DB 125A and 250A distribution boards are wall-mounted electrical distribution systems. Each distribution unit can accept a three-phase incoming electrical supply. The electrical supply can be connected through a Switch-Disconnecter, Circuit Breaker, RCCB, Contactor or Direct Connection Kit. A combination of single-phase and three-phase loads can be connected to the outgoing terminals.



[Door Closed]



[Door Open]



[Busbar Assembly]



[Internal]

The user assembles the components of the PRO-DB system, usually at the place of installation (on site).

A basic distribution system consists of an enclosed distribution board (Table 1), a supply connection kit (Table 2) and TD3 MCBs and RCBOs (refer to page 32) for load protection.

A typical distribution system consists of an enclosed panelboard, a supply connection kit and TemBreak 2 MCCBs for load protection.

Table 1 Pro-DB 125A and PRO-DB 250A

Number of outgoing ways	Enclosed Distribution Unit 125A or 250A		Busbar Assemblies	
	125A	250A	125A	250A
4	TB12504C		TB12504PA	
6	TB12506		TB12506PA	
8	TB1258C	TB25008C	TB12508PA	TB25008PA
12	TB12512C	TB25012C	TB12512PA	TB25012PA
16	TB12516C	TB25016C	TB12516PA	TB25016PA
18	TB12518C	TB25018C	TB12518PA	TB25018PA
24	TB12524C	TB25024C	TB12524PA	TB25024PA

Table 2 Pro-DB Supply Connection Kits

Supply Connection Kits	Code	Supply Connection Kits	Code
100A 3P Sw Disc Incomer 125A DB	SWD1003C	250A 3P MCCB Incomer 250A DB	MLD2503C
100A 4P Sw Disc Incomer 125A DB	SWD1004C	250A 3P MCCB Incomer 250A DB	MLD2504C
125A 3P Sw Disc Incomer 125A DB	SWD1253C	160A 4P CBR* Incomer 250A DB	CBR1604C
125A 4P Sw Disc Incomer 125A DB	SWD1254C	250A 4P CBR* Incomer 250A DB	CBR2504C
125A 4P Direct Connection Kit 125A DB	DIR125X	250A 3P Sw Disc Incomer 250A DB	SWD2503C
		250A 4P Sw Disc Incomer 250A DB	SWD2504C
		250A 4P Direct Connection Kit 250A DB	DIR250

*CBR - Circuit Breaker with Residual protection.

For details of the complete range of PRO-DB incomer kits, extension boxes and accessories refer to Wall-Mounted Electrical Distribution up to 800A catalogue ref: WMED1213.



PRO-PANEL 2 PANELBOARDS

Pro-Panel 2 400A and 800A Panel Boards are wall-mounted electrical distribution systems designed for Terasaki circuit breakers. At the heart of your electrical network the Pro-Panel range offers uncomplicated solutions for sub and main power distribution.

The three-phase incoming electrical supply can be connected through a Switch-Disconnecter, Circuit Breaker or Direct Connection Kit. A combination of single-phase and three phase loads can be connected to the outgoing terminals. The neutral conductor can be isolated by the supply connection device or connected directly to the neutral bar. Twin earth and neutral bars allow easy identification with corresponding line conductors.




[Door Closed]



[Door Open]



[Busbar Assembly]



[Internal]

The user assembles the components of the PRO-Panel 2 system, usually at the place of installation (on site).

A basic distribution system consists of an enclosed distribution board (Table 3), a supply connection kit (Table 4) and TD3 MCBs and RCBOs (refer to page 32) for load protection.

A typical distribution system consists of an enclosed panelboard, a supply connection kit and TemBreak 2 MCCBs for load protection.

Table 3 Pro-Panel 2 400A and 800A

		Enclosed Distribution Units			Busbar Assembly	
No. of 125A outgoing ways (TB2 Lite 160A frame)	No. of 250A outgoing ways (TB2 Lite 250A frame)	400A	600A	800A*	400A	800A
6	0	TP4006125			PA4006125	
8	0	TP4008125			PA4008125	
12	0	TP40012125			PA40012125	
16	0	TP40016125		TPP80025016125	PA40016125	
18	0	TP40018125		TPP80025018125	PA40018125	
4	2		TP80022504125	TPP80022504125		PA80022504125
6	2		TP80022506125	TPP80022506125		PA80022506125
4	4		TP80042504125	TPP80042504125		PA80042504125
10	2		TP800250010125	TPP80025010125		PA80025010125
8	4		TP80042508125	TPP80042508125		PA80042508125
14	4		TP800425014125	TPP800425014125		PA800425014125
12	6		TP800625012125	TPP800625012125		PA800625012125

* Suitable for 800A MCCB supply connection device

Table 4 Pro-Panel 2 Supply Connection Kits

Supply Connection Kits	Code	Supply Connection Kits	Code
400A 3P Direct Connection Kit	DIR400	800A 3P Direct Connection Kit	MLD2503C
400A 3P Links and Shroud Kit	INC4004003	400A 3P Links and Shroud Kit	MLD2504C
400A 4P Links and Shroud Kit	INC4004004	400A 4P Links and Shroud Kit	CBR1604C
Plus any MCCB or switch-disconnector model S400 from pages 15-16		630A 3P Links and Shroud Kit	CBR2504C
		630A 4P Links and Shroud Kit	SWD2503C
		800A 4P Links and Shroud Kit	SWD2504C
		PLUS any MCCB or switch-disconnector model S400 or 630 from pages 15-17 or a 4 Pole S800 switch-disconnector.	

For details of the complete range of PRO-PANEL 2 incomer kits, extension boxes and accessories refer to Wall-Mounted Electrical Distribution up to 800A catalogue ref: WMED1213.




Safety and protection are the prime purposes of Terasaki products. Our range of DIN modular Protection products covers ratings from 0.5A to 125A and includes:

- Circuit breakers for overload and short-circuit protection,
- Residual current devices for the prevention of electric shock and fires,
- Circuit breakers combining overload, short-circuit and residual current protection.

With more than 500 items in the range, there is a solution for most applications.

Accessories

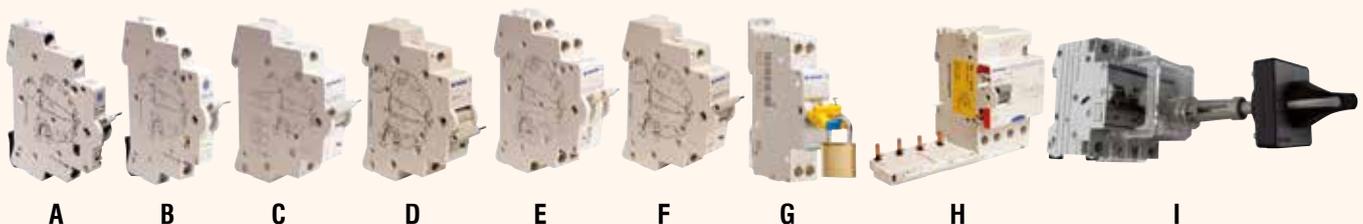

- A Auxiliary contact 1NO, 1NC. 6A, 230V AC. Not suitable for TD3RCCB
- B Alarm contact, 1NO, 1NC. 6A, 230V AC. Not suitable for TD3RCCB
- C RCCB switch. Combined auxiliary contact (1NO, 1NC, 6A, 230V AC) + Alarm contact (1NO, 1NC, 6A, 230V AC)
- D Shunt trip. RCCB switch (C) must be fitted before fitting the shunt trip to the TD3RCCB
- E Undervoltage trip. RCCB switch (C) must be fitted before fitting the shunt trip to the TD3RCCB
- F Overvoltage trip. Rated voltage, U_n , 230V AC. Opens the circuit breaker if supply voltage exceeds 280V AC. RCCB switch (C) must be fitted before fitting the shunt trip to the TD3RCCB
- G Padlock. Suitable for TD3 M06, M10, XA (open and closed) and for TD31P1M (in open position only)
- H Residual current block for TD3 M06 and M10
- I Rotary handle for TD3 ICP



Din Modular Protection Selection Guide

Miniature Circuit Breakers

Type				MCB			MCB			MCB			MCB			MCB		
Model	Quantity	Unit		TD3 M06			TD3 M10			TD3 1P1M			TD3 XA			TD3 ICP		
Poles (Modules)				1 (1), 1+N (2), 2 (2), 3 (3), 3+N(4), 4 (4)			1 (1), 1+N (2), 2 (2), 3 (3), 3+N(4), 4 (4)			1+N (1)			1 (1.5), 2 (3), 3 (4.5), 4 (6)			1 (1), 2 (2), 3 (3), 4 (4)		
Electrical Characteristics																		
Standard				IEC/EN 60898			IEC/EN 60898			IEC/EN 60898			IEC/EN 60898 IEC/EN 60947-2			UNE EN 20317		
Nominal Rated Current	I_n	A		6, 10, 16, 20, 25, 32, 40, 50, 63			0.5*, 1*, 2*, 3*, 4*, 6, 10, 16, 20, 25, 32, 40, 50, 63			6, 10, 16, 20, 25, 32, 40			80, 100, 125			5, 7.5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 63		
Rated Voltage	U_e	V		230/400 - 240/415			230/400 - 240/415			230/400 - 240/415			230/400 - 240/415			230/400 - 240/415		
Rated Frequency		Hz		50/60			50/60			50/60			50/60			50/60		
Breaking Capacity	$I_{cn} (I_{cu})$	kA		6			10			6			10 (10)			6		
Protection																		
Thermal- Magnetic Characteristic	Type			B, C			B, C, D			B, C			C, D			UNE EN 20317		
Connection																		
Rigid Conductor	Terminal	mm ²		25			35			16			70			25		
Flexible Conductor	Size			16			25			10			35			16		
Dimensions																		
Per Module	HxDxW	mm		85 x 74 x 17.5			84 x 74 x 17.5			84 x 74 x 17.5			90 x 72 x 26.5			85 x 74 x 17.5		

*Only for "D" type

Residual Current Devices and Modular Switches

Type				RCCB			RCCB			RCBO			RCBO			Modular Switch			
Model	Quantity	Unit		TD3 RCCB			TD3 RCCB			TD3 RCBO			TD3 RCBO			TD3 MS			
Poles (Modules)				2 (2)			4 (4)			1+N (1)			1+N (2)			1 (1), 2 (2), 3 (3), 4 (4)			
Electrical Characteristics																			
Standard				IEC/EN 61008			IEC/EN 61008			IEC/EN 61009			IEC/EN 61009			IEC EN 60947-3			
Rated Sensitivity	$(I_{\Delta n})$	mA		30	100	300	30	100	300	30		30	300						
Nominal Rated Current	I_n	A	AC type	25, 40, 63, 100	40, 63	25, 40, 63	25, 40, 63, 80, 100	63, 80, 100	25, 40, 63, 80, 100	6-40		6-40	6-40			32	63	100	125
	I_n	A	A type	25, 40, 63	-	-	40, 100	-	-	-		6-40							
	I_n	A	S type	-	-	-	-	-	40, 100	-		-							
	I_n	A	Ai type	25, 40, 63	-	-	40	-	-	-		-							
	I_n	A	S-Ai type	-	-	40, 63	-	-	40, 100	-		-							
Rated Voltage	U_n	V		230/ 400 - 240/ 415			230/400 - 240/415			230 - 240			230/240			230/400 - 240/415			
Breaking Capacity	$I_{cn} (I_m)$			(1.5)			(1.5)			10			6			-			
Energy Withstand (EN 61008)	I_t	kA ² s		> 22.5			> 22.5			-			-			-			
Peak Current Withstand (EN 61008)	I_{peak}	kA		> 3.3			> 3.3			-			-			-			
Short-circuit Withstand Capacity	$I_{cw} (rms)$	kA		-			-			-			-			0.48			
																0.94			
																1.2			
																1.5			
Rated Frequency		Hz		50			50			50/60			50			50/60			
Protection																			
Thermal-Magnetic Characteristic	Type			-			-			B, C			C			-			
Connection																			
Rigid Conductor	Terminal	mm ²		25			25			16			25			25			
Flexible Conductor	Size	mm ²		16			16			10			16			16			
Dimensions																			
Per module	H x D x W	mm		87.5 x 71 x 17.5			87.5 x 71 x 17.5			115 x 72 x 17.5			85.4 x 72 x 17.5			83 x 72 x 17.5			



TemTransfer 3 Automatic Changeover Controller for TemPower 2 ACBs, TemBreak 2 MCCBs and TemContact 2 Contactors

TemTransfer 3 is an Automatic Transfer Switch Controller. The TemTransfer 3 will monitor the voltage and frequency of the AC supply from two different sources, which could be from both generator or mains (utility), or a combination of both.

The module will monitor S1 (source 1) and in the event of a failure will issue a start command to S2 (source 2).

The controller (ACC) is designed to monitor the incoming AC mains supply (1 or 3 phases) for under/over voltage and under/over frequency. Should any of the parameters fall out of limit, the module will issue a changeover command. Once the supply is available and producing an output within limits, TemTransfer 3 will control the circuit breaker or contactor and switch the load from Source 1 or Source 2

TemTransfer 3 Product Features


TemTransfer 3's back-lit LCD shows system status and indicates any system warnings via a 4 line text display. Red and green LEDs indicate the operational status of the network. The module can be easily configured by using TemTransfer 3 Configuration Suite PC Software, via an interface kit (optional).

- Back-lit LCD with 4 line text display
- Real time clock
- PC / Front panel
- Volt-free relays
- Configurable timers
- Optional extension relays
- 5 configurable outputs
- 10 configurable outputs
- Event log
- Auto start inhibit
- Load inhibit
- Communication



Supporting many different topologies, configurable timers, volt-free digital inputs and outputs make the TemTransfer 3 controller a fully flexible solution to suit a wide variety of applications.

TemTransfer 3 Specifications

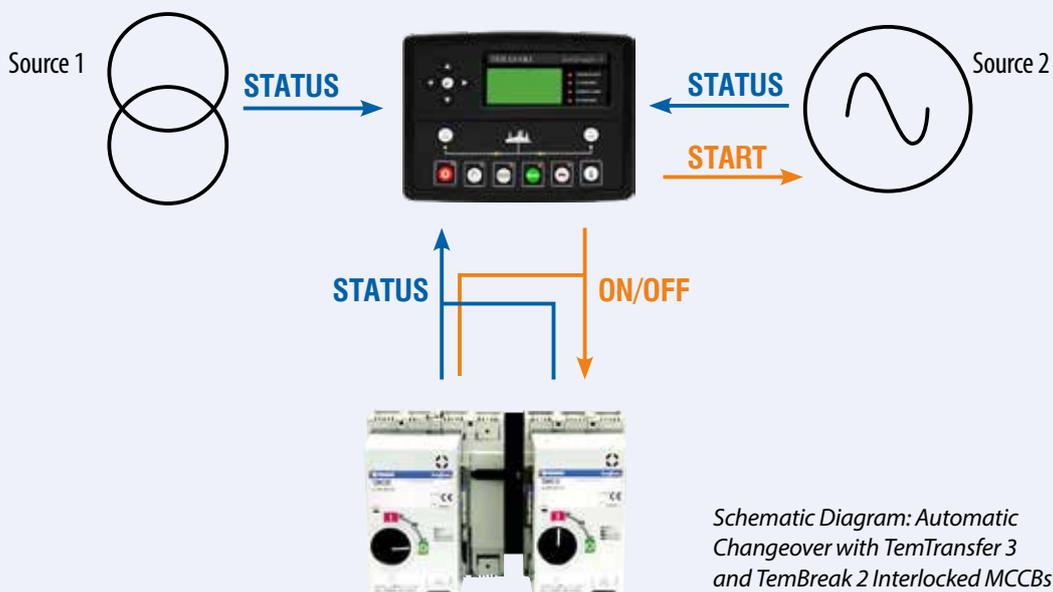



Selectivity Tables

Discrimination between TemBreak 2 Breakers

		Upstream													
		Unit	250A	400A	630A	800A			1000A		1250A		1600A		
			S250-NE, S250-GE S250-PE, H250-NE	S400-NE, S400-GE, S400-PE	E630-NE, S630-CE, S630-GE	S800-NE	S800-RE	H800-NE, L800-NE	S1000-SE	S1000-NE	S1250-SE, S1250-NE	S1250-GE	S1600-SE	S1600-NE	
			36kA, 65kA 70kA, 85kA	50kA, 70kA, 85kA	50kA	50kA	70kA	125kA, 200kA	50kA	70kA	50kA, 70kA	100kA	50kA	100kA	
Downstream	TB2 S125	S125-NJ 36kA	T	T	T	T	T	T	T	T	T	T	T	T	
		S125-GJ 65kA	T	T	T	T	50	T	T	T	T	T	T	T	
	TB2 S250	S160-NJ 36kA	.	T	T	T	T	T	T	T	T	T	T	T	
		S160-GJ 65kA	.	T	T	T	36	T	T	50	T	T	T	T	
		S250-NJ 36kA	.	T	T	T	T	T	T	T	T	T	T	T	
		S250-GJ 65kA	.	T	T	T	36	T	T	50	T	T	T	T	
	TB2 S/H/L250	H125-NJ H160-NJ 125kA	T	T	T	T	50	T	T	T	T	70	T	85	
		S250-NE 36kA	.	.	T	T	T	T	T	T	T	T	T	T	
		S260-GE 65kA	.	.	T	T	36	36	T	50	T	T	T	T	
		H250-NJ 125kA	.	.	T	T	50	T	T	T	T	70	T	85	
		S250-PE 40kA	.	.	T	T	36	36	T	50	T	70	T	T	
		H250-NE 125kA	.	.	T	T	36	36	T	50	T	70	T	85	
	TB2 E/S 630	E400-NJ 25kA	.	.	10	T	T	T	T	T	T	T	T	T	
		S400-CJ 36kA	.	.	10	25	25	25	30	30	T	T	T	T	
		S400-NJ 50kA	.	.	10	25	25	25	30	30	36	36	T	T	
		S400-NE 50kA	.	.	10	25	25	25	30	30	36	36	T	T	
		S400-GJ S400-GE S400-PJ S400-PE 70kA	.	.	10	25	25	25	30	30	36	36	T	50	
		E400-NE 36kA	T	T	T	T	
		S630-CE 50kA	36	36	T	T	
		S630-GE 70kA	36	36	T	50	
TB2 1000	S800-CJ S800-NJ S800-RJ S800-NE S800-RE 36kA	20	20		

Discrimination between TemBreak 2 and TD3 Breakers

		Upstream												
		S160-SJ (40kA) S160-SCJ (25kA) E160-SJ (16kA)							S250-SJ (40kA) E250-SJ (25kA) E250-SCJ (16kA)					
		In	25A	40A	63A	80A	100A	125A	160A	100A	125A	160A	200A	250A
Downstream	TD3 M06, TD3 M10	6A	1000	1000	3000	3000	5000	5000	600	T	T	T	T	T
		10A	1000	1000	2000	2000	4000	4000	5000	T	T	T	T	T
		16A	600	600	2000	2000	3000	3000	4000	T	T	T	T	T
		20A	600	600	2000	2000	3000	3000	4000	T	T	T	T	T
		25A	.	600	1500	1500	2500	2500	3000	T	T	T	T	T
		32A	.	600	1500	1500	2500	2500	3000	9000	T	T	T	T
		40A	.	.	1500	1500	2500	2500	3000	8000	9000	T	T	T
		50A	.	.	1500	1500	2500	2500	3000	7000	8000	9000	T	T
		63A	.	.	.	1500	2500	2500	3000	6000	7000	8000	9000	T

Notes: 1. All pick-up current and time delay settings are to be set a maximum for upstream MCCBs.
2. In is expressed in kA.
3. T-Total Selectivity.


Notes:
1. This rating is not available for S160-GJ
2. Is is expressed in A
3. T - Total Selectivity

Cascade between TemBreak 2 and TD3 Breakers

		Upstream													
		S160-SJ (40kA) S160-SCJ (25kA) E160-SJ (16kA)						S250-SJ (40kA) E250-SJ (25kA) E250-SCJ (16kA)							
		In	25kA	40kA	63kA	80kA	100kA, 125kA, 160kA	25kA	40kA	63kA	100kA 125kA	160kA	160kA	100kA, 125kA, 160kA, 200kA, 250kA	
Downstream	6A, 10A, 16A, 20A	25	25	25	25	20	40	40	40	40	30	25	20	25	
	25A	.	25	25	25	20	.	40	40	40	30	25	20	25	
	32A	.	25	25	25	20	.	40	40	40	30	25	20	25	
	40A, 50A	.	.	25	25	20	.	.	40	40	30	25	20	25	
	63A	.	.	.	25	20	.	.	.	40	30	25	20	25	

Notes:
1. Cascade fault level limit is expressed in kA

We have a network of Regional Sales Managers to cover the UK and Ireland.
Call the number below for your nearest contact.

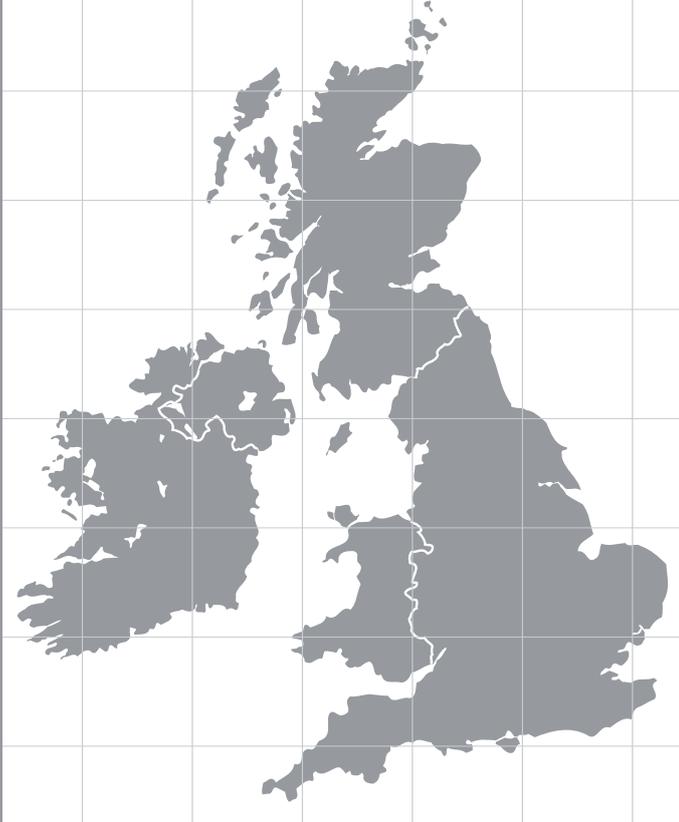

TERASAKI
Innovators in Protection Technology

Terasaki Electric (Europe) Ltd.
80 Beardmore Way
Clydebank Industrial Estate
Glasgow G81 4HT,
SCOTLAND



0141 941 1940
sales@terasaki.co.uk



www.terasaki.com



CAT REF: 19-G00GB

© Terasaki Electric (Europe) Ltd, 2019.

Ratings and specifications mentioned in this Catalogue are subject to change without notice.