CR1014/TD 20A DP SWITCH WITH LED PRINTED TUMBLE DRYER

CONSTRUCTION

Product Category Product Group **Product Type** Shape Material Finish Mounting Type

POWER

Current Current Type Frequency Input Voltage **Switched Poles** Number of Rocker Switches Number of Ways **Fuse Rating**

AESTHETICS

Plate Gang / Module Size Plate Colour **Rocker Colour** Light Reflectance Value (LRV) Printing Text/Type Status Indicator Switched Outlets Part M Compliance Anti Microbial Properties **Key Features & Benefits**

TERMINAL

L & N Terminal Capacity as per BS Standard Earth Terminal Capacity as per BS Standard Number of Earth Terminals Cable Strip Length Screwdriver Type Required Torque requirement as per BS Standard L&N Torque requirement as per BS Standard Earth

LOCATION

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement **IP Rating**

DIMENSIONAL / FIXING

Height Width Depth Overall (Inc Rocker) **Depth Interior only Gross Weight** Minimum Back Box Depth Suggested Back Box Depth **Fixing Centres** Minimum Access Top **Minimum Access Bottom Minimum Access Left Minimum Access Right Minimum Access Front** Minimum Access Rear Flush Mounting Metal Box Flush Mounting Dry Lining Box Surface Mounting Box

STANDARDS

British Standard/s Other Markings/Standards

PACKAGING

Inner Carton Qty

Customer MOQ

SUSTAINABILITY URL to technology list

Wiring Accessory Power & Control Plate Switch Square Plate Urea Formaldehyde Moulded Flush/Surface

Building Information Modelling

WIRING

20 Amps AC 50Hz 250V Double Pole 1 Not Applicable

1 Gang White White 74 Tumble Dryer, Laser Printed Υ Ν Υ Y **Curved Slimline Plate** All Upward Facing Terminals Full Contact Cable Clamp Integrated LED Light Indicator Fully Rated to 20A

3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm² 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm² 2 10mm Slotted Type 0.8Nm 0.8Nm


Occasionally reaching +35°C Not exceeding +25°C 2000m IP2X


86mm 86mm 25mm 15mm 0.08kg 25mm 25mm 60.3mm 100cm 100cm 100cm 100cm 100cm 100cm SB655 (25mm) or CR2201/BG (40mm) SB619 (35mm) 9047 (25mm)

BS EN 60669-1 CE

10 10

https://www.crabtreecommercial.co.uk/

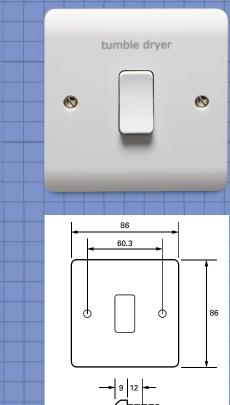



Electrium Sales Limited A Siemens Company +44 (0) 1543 438310 Fax: +44 (0) 1543 000000 Email: crabtree.technical@electrium.co.uk

www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree

