# CR1015/WH

**WATER HEATER** 





### **CONSTRUCTION**

**Product Category** Wiring Accessory **Product Group** Power & Control **Product Type** Plate Switch Square Plate Shape Material Urea Formaldehyde **Finish** Moulded Mounting Type Flush/Surface

### **POWER**

Current 20 Amps **Current Type** AC 50Hz Frequency Input Voltage 250V **Switched Poles** Double Pole **Number of Rocker Switches Number of Ways** 

**AESTHETICS** 

**Fuse Rating** 

Plate Gang / Module Size 1 Gang Plate Colour White **Rocker Colour** White Light Reflectance Value (LRV) 74

Printing Text/Type Water Heater, Laser Printed

Status Indicator Ν **Switched Outlets** Ν Part M Compliance Υ **Anti Microbial Properties** 

**Key Features & Benefits** Curved Slimline Plate All Upward Facing Terminals Full Contact Cable Clamp

Fully Rated to 20A

Not Applicable

### **TERMINAL**

L & N Terminal Capacity as per BS Standard 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup>, 1 x 6.0mm<sup>2</sup> Earth Terminal Capacity as per BS Standard 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup>, 1 x 6.0mm<sup>2</sup> **Number of Earth Terminals Cable Strip Length** Screwdriver Type Required Slotted Type Torque requirement as per BS Standard L&N 0 8Nm Torque requirement as per BS Standard Earth 0.8Nm

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement 2000m IP Rating IP2X

Occasionally reaching +35°C

Not exceeding +25°C

### **DIMENSIONAL / FIXING**

Heiaht 86mm Width 86mm **Depth Overall (Inc Rocker)** 25mm **Depth Interior only** 15mm Gross Weight 0.076kg Minimum Back Box Depth 25mm Suggested Back Box Depth 25mm Fixing Centres 60.3mm **Minimum Access Top** 100cm **Minimum Access Bottom** 100cm **Minimum Access Left** 100cm **Minimum Access Right** 100cm **Minimum Access Front** 100cm **Minimum Access Rear** 100cm

Flush Mounting Metal Box SB655 (25mm) or CR2201/BG (40mm)

Flush Mounting Dry Lining Box SB619 (35mm) **Surface Mounting Box** 9047 (25mm)

### **STANDARDS**

BS EN 60669-1 **British Standard/s** 


Other Markings/Standards

## **PACKAGING**

**Inner Carton Qty** 10 **Customer MOQ** 10

### **SUSTAINABILITY**

URL to technology list https://www.crabtreecommercial.co.uk/

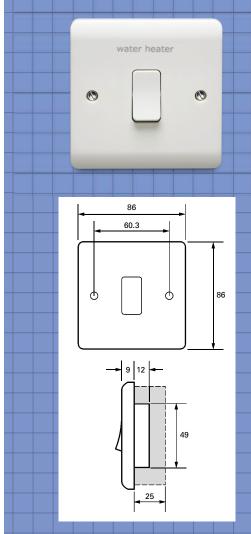

**Electrium Sales Limited** A Siemens Company +44 (0) 1543 438310

Fax: +44 (0) 1543 000000 Email: crabtree.technical@electrium.co.uk

www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree



