# PRINTED BELL SYMBOL

**CR1162/BS** 

10A 1G 2 WAY RETRACTIVE SWITCH

## **CONSTRUCTION**

Product Category Product Group Product Type Shape Material Finish Mounting Type

#### **POWER**

Current Current Type Frequency Input Voltage Switched Poles Number of Rocker Switches Number of Ways Fuse Rating

#### **AESTHETICS**

Plate Gang / Module Size Plate Colour Rocker Colour Light Reflectance Value (LRV) Printing Text/Type Status Indicator Switched Outlets Part M Compliance Anti Microbial Properties Key Features & Benefits

#### **TERMINAL**

L & N Terminal Capacity as per BS Standard Earth Terminal Capacity as per BS Standard Number of Earth Terminals Cable Strip Length Screwdriver Type Required Torque requirement as per BS Standard L&N Torque requirement as per BS Standard Earth

#### LOCATION

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement IP Rating

#### **DIMENSIONAL / FIXING**

Heiaht Width Depth Overall (Inc Rocker) Depth Interior only Gross Weight Minimum Back Box Depth Suggested Back Box Depth Fixing Centres Minimum Access Top **Minimum Access Bottom Minimum Access Left Minimum Access Right Minimum Access Front Minimum Access Rear** Flush Mounting Metal Box Flush Mounting Dry Lining Box Surface Mounting Box

### **STANDARDS**

British Standard/s Other Markings/Standards

## PACKAGING

Inner Carton Qty Customer MOQ

#### SUSTAINABILITY URL to technology list

Wiring Accessory Lighting Control Plate Switch Square Plate Urea Formaldehyde Moulded Flush/Surface

**Building Information Modelling** 

WIRING

10 Amps AC 50Hz 250V Single Pole 1 2 Not Applicable

1 Gang White Vhite 74 Bell Symbol, Laser Printed N N Y Y Curved Slimline Plate All Upward Facing Terminals Full Contact Cable Clamp Fullv Rated to 10A


4 x 1.0mm<sup>2</sup>, 3 x 1.5mm<sup>2</sup>, 1 x 2.5mm<sup>2</sup> Not Applicable 0 10mm Slotted Type 0.5Nm Not Applicable


Occasionally reaching +35°C Not exceeding +25°C 2000m IP2X

86mm 86mm 23mm 15mm 0.056kg 16mm 16mm 60.3mm 100cm 100cm 100cm 100cm 100cm 100cm SB623 (16mm) SB619 (35mm) 9043 (20mm)

BS EN 60669-1 CE

10 10

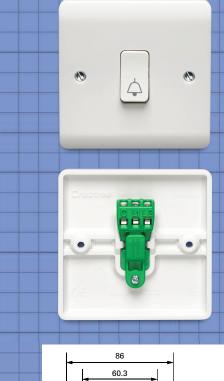

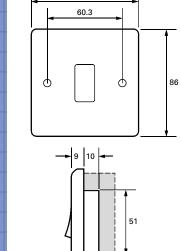

16

Electrium Sales Limited A Siemens Company Tel: +44 (0) 1543 438310 Fax: +44 (0) 1543 000000 Email: crabtree.technical@electrium.co.uk

www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.

