CR1302 USB TYPE 3.0 CONNECTOR TYPE A KEYSTONE MODULE

CONSTRUCTION

Product Category Product Group Product Type Shape Material Finish Mounting Type

POWER

Current Current Type Frequency Input Voltage Switched Poles Number of Rocker Switches Number of Ways Fuse Rating

AESTHETICS

Plate Gang / Module Size Plate Colour Rocker Colour Light Reflectance Value (LRV) Printing Text/Type Status Indicator Switched Outlets Part M Compliance Anti Microbial Properties Key Features & Benefits

TERMINAL

L & N Terminal Capacity as per BS Standard Earth Terminal Capacity as per BS Standard Number of Earth Terminals Cable Strip Length Screwdriver Type Required Torque requirement as per BS Standard L&N Torque requirement as per BS Standard Earth

LOCATION

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement IP Rating

DIMENSIONAL / FIXING

Height Width Depth Overall Depth Interior only Gross Weight Minimum Back Box Depth Suggested Back Box Depth **Fixing Centres** Minimum Access Top Minimum Access Bottom **Minimum Access Left Minimum Access Right Minimum Access Front Minimum Access Rear** Flush Mounting Metal Box Flush Mounting Dry Lining Box Surface Mounting Box

STANDARDS

British Standard/s Other Markings/Standards

PACKAGING

Inner Carton Qty Customer MOQ

SUSTAINABILITY

URL to technology list

Wiring Accessory Data & Communication Keystone Module Keystone Polycarbonate Moulded Flush/Surface Keystone Modular System

Building Information Modelling

WIRING

Not Applicable Not Applicable Not Applicable Not Applicable 0 Not Applicable Not Applicable

1 Keystone Module White Not Applicable Not Applicable Not Applicable N Y N Elegant Modular System Angled Push Fit Fixing Solution

Not Applicable Not Applicable O Not Applicable Not Applicable Not Applicable Not Applicable


Not Applicable Not Applicable 2000m Not Applicable


17mm 16mm 32mm Not Applicable 0.01kg 35mm 35mm Not Applicable 100cm 100cm 100cm 100cm 100cm 100cm SB615 (1/2 Gang), SB625 (3/4 Gang) SB619 (1/2 Gang), SB629 (3/4 Gang) 9041 (1/2 Gang), 9040 (3/4 Gang)


Universal Serial Bus 3.0 Specification Revision 2 CE

10 10

https://www.crabtreecommercial.co.uk/

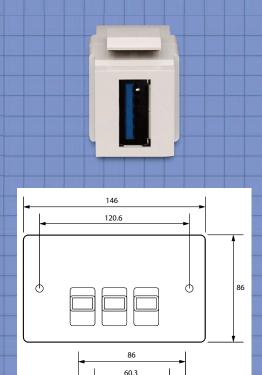





Electrium Sales Limited A Siemens Company Tel: +44 (0) 1543 438310 Fax: +44 (0) 1543 000000 Email: crabtree.technical@electrium.co.uk

www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.

Contraction

