

# CR1303/D/R

13A 1G DP SWITCHED SOCKET ALL RED  
WITH LED CLEAN EARTH



Instinct™  
WIRING ACCESSORIES

## CONSTRUCTION

Product Category	Wiring Accessory
Product Group	Power & Control
Product Type	Socket Outlet Type G (Standard UK 3 Pin)
Shape	Square Plate
Material	Urea Formaldehyde
Finish	Moulded
Mounting Type	Flush/Surface

## POWER

Current	13 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Switched Poles	Double Pole
Number of Rocker Switches	1
Number of Ways	Not Applicable
Fuse Rating	Not Applicable

## AESTHETICS

Plate Gang / Module Size	1 Gang
Plate Colour	Red
Rocker Colour	Red
Light Reflectance Value (LRV)	14
Printing Text/Type	Not Applicable
Status Indicator	Y
Switched Outlets	Y
Part M Compliance	Y
Anti Microbial Properties	Y
Key Features & Benefits	Curved Slimline Plate All Upward Facing Terminals Full Contact Cable Clamp Safety Shutter System Integrated LED Light Indicator

## TERMINAL

L & N Terminal Capacity as per BS Standard	3 x 2.5mm <sup>2</sup> , 2 x 4.0mm <sup>2</sup>
Earth Terminal Capacity as per BS Standard	3 x 1.5mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> , 2 x 4.0mm <sup>2</sup>
Number of Earth Terminals	4
Cable Strip Length	12mm
Screwdriver Type Required	Slotted Type
Torque requirement as per BS Standard L&N	1.2Nm
Torque requirement as per BS Standard Earth	1.2Nm

## LOCATION

Max Ambient Operating Temp as per BS Req.	+40°C
Min Ambient Operating Temp as per BS Req.	-5°C
Max Altitude as per BS Requirement	2000m
IP Rating	IP2X

## DIMENSIONAL / FIXING

Height	86mm
Width	86mm
Depth Overall (Inc Rocker)	29mm
Depth Interior only	16mm
Gross Weight	0.112kg
Minimum Back Box Depth	25mm
Suggested Back Box Depth	25mm
Fixing Centres	120.6mm
Minimum Access Top	100cm
Minimum Access Bottom	100cm
Minimum Access Left	100cm
Minimum Access Right	100cm
Minimum Access Front	100cm
Minimum Access Rear	100cm
Flush Mounting Metal Box	SB655 (25mm) or CR2201/BG (40mm)
Flush Mounting Dry Lining Box	SB619 (35mm)
Surface Mounting Box	9047 (25mm)

## STANDARDS


British Standard/s	BS 1363-2
Other Markings/Standards	CE

## PACKAGING

Inner Carton Qty	10
Customer MOQ	10


## SUSTAINABILITY

URL to technology list	<a href="https://www.crabtreecommercial.co.uk/">https://www.crabtreecommercial.co.uk/</a>
------------------------	---

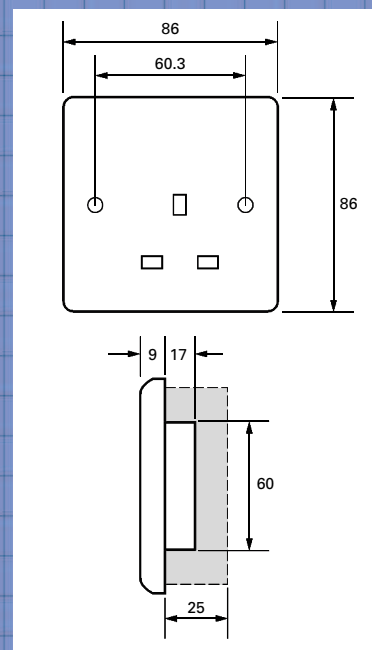

Electrium Sales Limited  
A Siemens Company  
Tel: +44 (0) 1543 438310  
Fax: +44 (0) 1543 000000  
Email: [crabtree.technical@electrium.co.uk](mailto:crabtree.technical@electrium.co.uk)  
[www.electrium.co.uk](http://www.electrium.co.uk)

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.



Crabtree