

CR1306/USB/D

13A 2 GANG DP SWITCHED SOCKET
DUAL EARTH WITH 2A TWIN USB



Instinct™
WIRING ACCESSORIES

CONSTRUCTION

Product Category	Wiring Accessory
Product Group	Power & Control
Product Type	Socket Outlet, Type G (Standard UK 3 Pin)
Shape	Rectangular Plate
Material	Urea Formaldehyde
Finish	Moulded
Mounting Type	Flush/Surface

POWER

Current	13 Amps
Current Type	AC (13A Socket Outlet) DC (USB Port)
Frequency	50Hz
Input Voltage	250V
Switched Poles	Double Pole
Number of Rocker Switches	2
Number of Ways	Not Applicable
Fuse Rating	Not Applicable

AESTHETICS

Plate Gang / Module Size	2 Gang
Plate Colour	White
Rocker Colour	White
Light Reflectance Value (LRV)	74
Printing Text/Type	Not Applicable
Status Indicator	N
Switched Outlets	Y
Part M Compliance	Y
Anti Microbial Properties	Y
Key Features & Benefits	Curved Slimline Plate All Upward Facing Terminals Full Contact Cable Clamp Safety Shutter System Intelligent USB Charge Optimisation

TERMINAL

L & N Terminal Capacity as per BS Standard	3 x 2.5mm ² , 2 x 4.0mm ²
Earth Terminal Capacity as per BS Standard	3 x 1.5mm ² , 3 x 2.5mm ² , 2 x 4.0mm ²
Number of Earth Terminals	2
Cable Strip Length	12mm
Screwdriver Type Required	Slotted Type
Torque requirement as per BS Standard L&N	1.2Nm
Torque requirement as per BS Standard Earth	1.2Nm

LOCATION

Max Ambient Operating Temp as per BS Req.	+40°C
Min Ambient Operating Temp as per BS Req.	-5°C
Max Altitude as per BS Requirement	2000m
IP Rating	IP2X

DIMENSIONAL / FIXING

Height	86mm
Width	146mm
Depth Overall (Inc Rocker)	40mm
Depth Interior only	25mm
Gross Weight	0.222kg
Minimum Back Box Depth	35mm
Suggested Back Box Depth	35mm
Fixing Centres	120.6mm
Minimum Access Top	100cm
Minimum Access Bottom	100cm
Minimum Access Left	100cm
Minimum Access Right	100cm
Minimum Access Front	100cm
Minimum Access Rear	100cm
Flush Mounting Metal Box	SB625 (35mm) or CR2203/BG (40mm)
Flush Mounting Dry Lining Box	SB629 (35mm)
Surface Mounting Box	9040 (34mm)

STANDARDS



British Standard/s	BS 1363-2, BS EN 60950-1
Other Markings/Standards	CE

PACKAGING

Inner Carton Qty	5
Customer MOQ	5

SUSTAINABILITY

URL to technology list	https://www.crabtreecommercial.co.uk/
------------------------	---

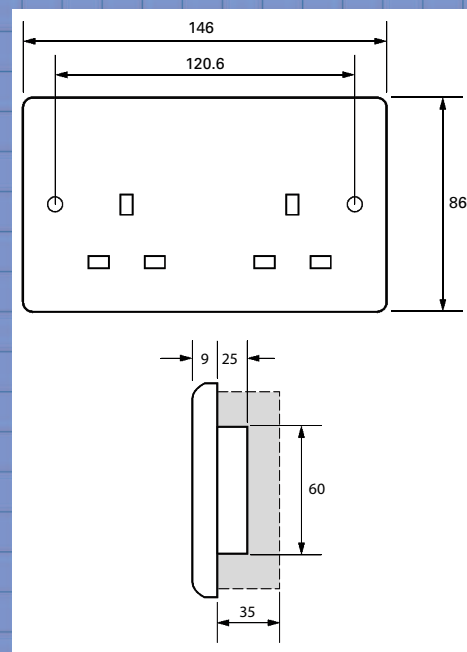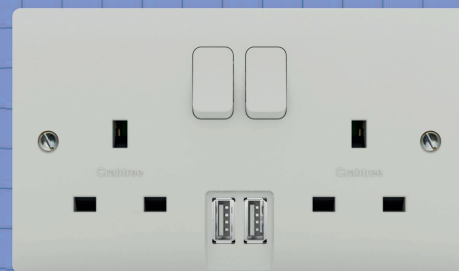

Electrium Sales Limited
A Siemens Company
Tel: +44 (0) 1543 438310
Fax: +44 (0) 1543 000000
Email: crabtree.technical@electrium.co.uk
www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.



Crabtree