# **CR1827/FN**

**13A SWITCHED FCU PRINTED FAN** 

# **CONSTRUCTION**

Product Category Product Group Product Type Shape Material Finish Mounting Type

# POWER

Current Current Type Frequency Input Voltage Switched Poles Number of Rocker Switches Number of Ways Fuse Rating

### **AESTHETICS**

Plate Gang / Module Size Plate Colour Rocker Colour Light Reflectance Value (LRV) Printing Text/Type Status Indicator Switched Outlets Part M Compliance Anti Microbial Properties Key Features & Benefits

### **TERMINAL**

L & N Terminal Capacity as per BS Standard Earth Terminal Capacity as per BS Standard

Number of Earth Terminals Cable Strip Length Screwdriver Type Required Torque requirement as per BS Standard L&N Torque requirement as per BS Standard Earth

# LOCATION

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement IP Rating

# **DIMENSIONAL / FIXING**

Height Width Depth Overall (Inc Rocker) Depth Interior only **Gross Weight** Minimum Back Box Depth Suggested Back Box Depth **Fixing Centres Minimum Access Top Minimum Access Bottom Minimum Access Left Minimum Access Right Minimum Access Front Minimum Access Rear** Flush Mounting Metal Box Flush Mounting Dry Lining Box Surface Mounting Box

# **STANDARDS**

British Standard/s Other Markings/Standards

#### PACKAGING Inner Carton Qty Customer MOQ

SUSTAINABILITY URL to technology list Wiring Accessory Power & Control Fused Connection Unit Square Plate Urea Formaldehyde Moulded Flush/Surface

**Building Information Modelling** 

13 Amps AC 50Hz 250V Double Pole 1 1 13 Amps

1 Gang White Vhite 74 Fan, Laser Printed N N Y Curved Slimline Plate All Upward Facing Terminals Full Contact Cable Clamp Fitted with ASTA Approved Fused Link

3 x 1.5mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup> 1 x 1.5mm<sup>2</sup>, 1 x 2.5mm<sup>2</sup> (Solid), 1 x 0.5mm<sup>2</sup>, 1 x 1.5mm<sup>2</sup> (Flex) 2 14mm Slotted Type 1.2Nm 0.8Nm


+40°C -5°C 2000m IP2X

86mm 86mm 29mm 18mm 0.112kg 25mm 25mm 60 3mm 100cm 100cm 100cm 100cm 100cm 100cm SB655 or CR2201/BG (25mm) SB619 (35mm) 9047 (25mm)

BS 1363-4 CE

10 10

https://www.crabtreecommercial.co.uk/

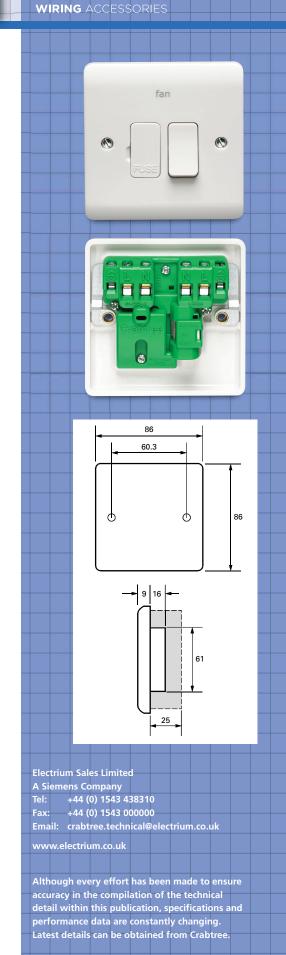



Contraction