

# CR2206/BG

## 6 & 8 GANG SURFACE BOX



**Instinct**<sup>TM</sup>  
WIRING ACCESSORIES

### CONSTRUCTION

Product Category	Wiring Accessory
Product Group	Power & Control
Product Type	Grid System
Shape	Not Applicable
Material	Mild Steel
Finish	Powder Coated
Mounting Type	Surface

### POWER

Current	Not Applicable
Current Type	Not Applicable
Frequency	50Hz
Input Voltage	250V
Switched Poles	Not Applicable
Number of Rocker Switches	0
Number of Ways	Not Applicable
Fuse Rating	Not Applicable

### AESTHETICS

Plate Gang / Module Size	6/8 Gang
Plate Colour	Birch Grey
Rocker Colour	Not Applicable
Light Reflectance Value (LRV)	29
Printing Text/Type	Not Applicable
Status Indicator	N
Switched Outlets	N
Part M Compliance	Y
Anti Microbial Properties	N
Key Features & Benefits	Coated in Low Smoke & Fume (LSF) Powder Coat Finish as standard Robust & Reliable

### TERMINAL

L & N Terminal Capacity as per BS Standard	Not Applicable
Earth Terminal Capacity as per BS Standard	4 x 1.0mm <sup>2</sup> , 3 x 1.5mm <sup>2</sup> , 1 x 2.5mm <sup>2</sup>
Number of Earth Terminals	1
Cable Strip Length	Not Applicable
Screwdriver Type Required	Not Applicable
Torque requirement as per BS Standard L&N	Not Applicable
Torque requirement as per BS Standard Earth	1.2Nm

### LOCATION

Max Ambient Operating Temp as per BS Req.	Not Applicable
Min Ambient Operating Temp as per BS Req.	Not Applicable
Max Altitude as per BS Requirement	2000m
IP Rating	Not Applicable

### DIMENSIONAL / FIXING


Height	146mm
Width	146mm
Depth	40mm
Depth Interior only	Not Applicable
Gross Weight	0.396kg
Minimum Back Box Depth	Not Applicable
Suggested Back Box Depth	Not Applicable
Fixing Centres	132mm
Minimum Access Top	100cm
Minimum Access Bottom	100cm
Minimum Access Left	100cm
Minimum Access Right	100cm
Minimum Access Front	100cm
Minimum Access Rear	100cm
Flush Mounting Metal Box	Not Applicable
Flush Mounting Dry Lining Box	Not Applicable
Surface Mounting Box	Not Applicable

### PACKAGING

Inner Carton Qty	1
Customer MOQ	1

### SUSTAINABILITY

URL to technology list	<a href="https://www.crabtreecommercial.co.uk/">https://www.crabtreecommercial.co.uk/</a>
------------------------	---

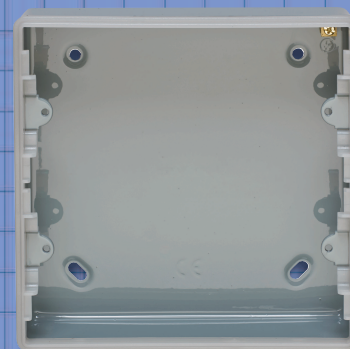

Electrium Sales Limited  
A Siemens Company  
Tel: +44 (0) 1543 438310  
Fax: +44 (0) 1543 000000  
Email: [crabtree.technical@electrium.co.uk](mailto:crabtree.technical@electrium.co.uk)  
[www.electrium.co.uk](http://www.electrium.co.uk)

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.



**Crabtree**