CR2570/BG

12 GANG GRID COVER PLATE METALCLAD

CONSTRUCTION

Product Category Product Group Product Type Shape Material Finish Mounting Type

POWER

Current Current Type Frequency Input Voltage Switched Poles Number of Rocker Switches Number of Ways Fuse Rating

AESTHETICS

Plate Gang / Module Size Plate Colour Rocker Colour Light Reflectance Value (LRV) Printing Text/Type Status Indicator Switched Outlets Part M Compliance Anti Microbial Properties Key Features & Benefits

TERMINAL

L & N Terminal Capacity as per BS Standard Earth Terminal Capacity as per BS Standard Number of Earth Terminals Cable Strip Length Screwdriver Type Required Torque requirement as per BS Standard L&N Torque requirement as per BS Standard Earth

LOCATION

Max Ambient Operating Temp as per BS Req. Min Ambient Operating Temp as per BS Req. Max Altitude as per BS Requirement IP Rating

DIMENSIONAL / FIXING

Height Width Depth Overall (Inc Rocker) Depth Interior only Gross Weight Minimum Back Box Depth Suggested Back Box Depth **Fixing Centres** Minimum Access Top Minimum Access Bottom **Minimum Access Left Minimum Access Right Minimum Access Front Minimum Access Rear** Flush Mounting Metal Box Flush Mounting Dry Lining Box Surface Mounting Box

STANDARDS

British Standard/s Other Markings/Standards

PACKAGING

Inner Carton Qty Customer MOQ

SUSTAINABILITY

URL to technology list

Wiring Accessory Power & Control Grid System Rectangular Plate Mild Steel Powder Coated Flush/Surface Building Information Modelling

WIRING

Not Applicable Not Applicable Not Applicable Not Applicable O Not Applicable Not Applicable

12 Gang Birch Grey Not Applicable 29 Not Applicable N Y Y Curved Slimline Plate Front Fixed & Screw Retained

Not Applicable Not Applicable 0 Not Applicable Slotted Type Not Applicable Not Applicable

Not Applicable Not Applicable 2000m IP2X (Full Instinct Grid Assembly)


206.3mm 146mm 9mm Not Applicable 0.226kg Not Applicable Not Applicable 132mm 100cm 100cm 100cm 100cm 100cm 100cm CR2209/BG (40mm with knockouts) Not Applicable CR2209/BG (40mm with knockouts)

BS 5733 CE

1

1

https://www.crabtreecommercial.co.uk/

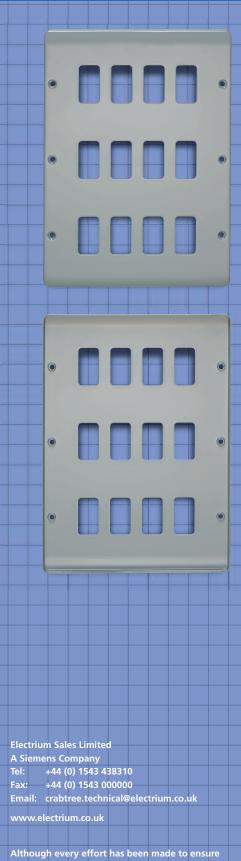

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree.

Contraction